


Zeus is an IP65-rated, square bollard for ground or solid surface installation. It is available in 3 heights (4.5", 12.4", 28.2"), 2 color temperatures and 5 standard finishes. Dark Sky compliant for output below 80°.



TECHNICAL DATA

Wattage / Input	10W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Head/Base: Die-Cast Aluminum Pole: Extruded Aluminum Lens: Tempered, Transparent Glass Diffuser
CCT	2700K, 3000K
CRI	>80
BUG Rating	B0-U2-G1
Delivered Lumens	362 lm (3000K) Dark Sky compliant, output below 80°
Efficacy	36.2 lm/W (3000K)
Optics	Diffuse
LED Source	Mid Power LED
Finishes	5 Standard, See Below
Fixture Dimensions	8.66" l x 3.94" w x 4.53" h or 12.4" h
IP Rating	IP65
Impact Resistance	IK06

Fixture Dimensions

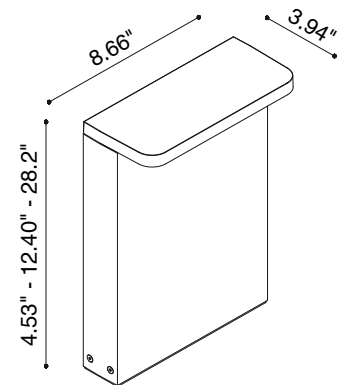

ORDERING INFORMATION

Example: D901521053.US. Power Supplies / Accessories sold separately.

D9015				US
Model No.	CCT	Height	Finish	
D9015	310 - 2700K 110 - 3000K	4 - 4.5" h 5 - 12.4" h 6 - 28.2" h	2 - White 3 - Sand 4 - Graphite 5 - Aluminum 8 - Corten	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-8
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-8

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-7

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures 10W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-7

*For other power supply options consult factory.***ACCESSORIES - Installation****D9042**

Anchor Bolts

FINISHES

white



sand



graphite



aluminum




corten

*Job Name/Date:**Fixture Type Designation:*

PHOTOMETRIC DATA


All heights

Maximum Candela = 324.5

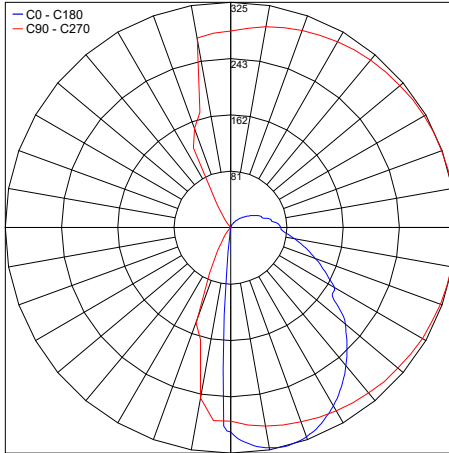


PHOTOMETRIC FILENAME : ZEUS-2700K.IES

Maximum Candela = 338.0

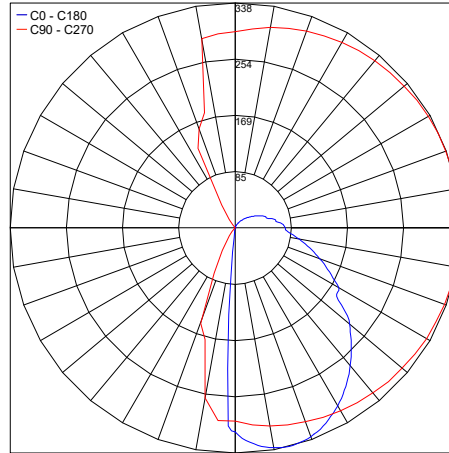

PHOTOMETRIC FILENAME : ZEUS-3000K.IES

Maximum Candela = 354.9

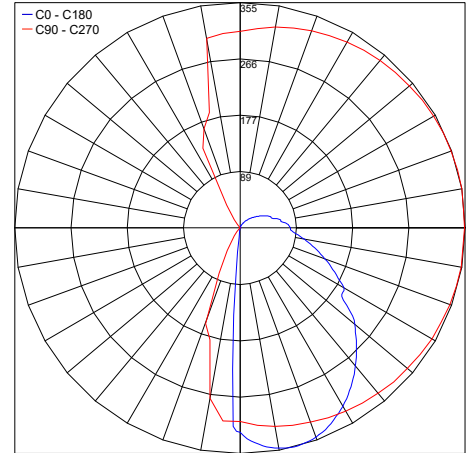

PHOTOMETRIC FILENAME : ZEUS-4000K.IES

Job Name/Date:

Fixture Type Designation: