

Zio is a round, surface mounted luminaire with an inner ring for installation on walls or ceilings. It is IP65 wet label rated and available in static white (integral or remote driver), tunable white (remote driver), and RGBW with an integral DMX control and driver. The ring can be painted in a contrasting color for visual effect.




**MADE IN THE U.S.A.**  
**ADA Compliant**

## TECHNICAL DATA

<b>Wattage / Input</b>	13W
<b>Power Supply</b>	Integral or Remote Lutron (static white) Integral DMX 120-277VAC (RGBW) Remote Driver 500mA (Tunable White)
<b>Dimming</b>	0-10V Dimming (RGBW is DMX)
<b>Construction</b>	Body: Extruded Aluminum Lens: Acrylic
<b>CCT</b>	2700K, 3000K, 3500K, 4000K, RGBW, Tunable White (2700K - 6500K)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	1157 lm (3000K)
<b>Efficacy</b>	89 lm/W (3000K)
<b>Finishes</b>	5 Standard, Custom RAL on request
<b>Fixture Dimensions</b>	Ø8.34" x 1.78"
<b>Aperature</b>	Ø6.58"
<b>Fixture Weight</b>	2.2 lbs
<b>LED Source</b>	Mid Power LED
<b>IP Rating</b>	IP65

Fixture Dimensions

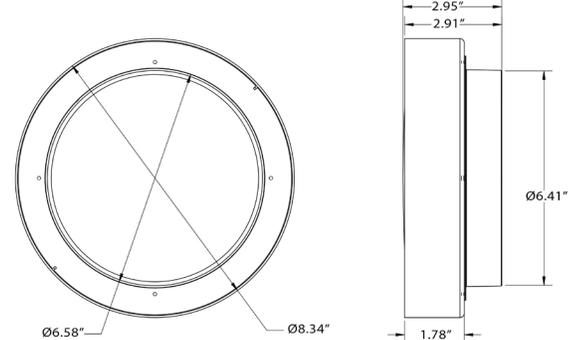

## ORDERING INFORMATION

Example: ZIO-L-30-1-TS-SC-X-C-0. Accessories ordered separately.

ZIO-L	-		-	1	-		-		-	X	-		-	0
-------	---	--	---	---	---	--	---	--	---	---	---	--	---	---

Model #	CCT	Body	Body Finish	Ring Finish	Lens	Dimming	Options
ZIO-L	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K RW - RGBW TW - Tunable White (2700K-6500K)	1 - Surface Mounted	11 - White Suede 02 - Black Suede 03 - Gray 18 - Tex. Bronze TS - Silver C - Custom	SC - same color as body 11 - White Suede 02 - Black Suede 03 - Gray 22 - Orange 66 - Yellow 33 - Red 44 - Blue C - Custom	X - Opal	C - 120-277VAC 0-10V Dimming Integral (static white) L - Lutron Dimming Remote Driver (Static White) X - Integral DMX Control and Driver (RGBW) R - Remote Driver (Tunable White)	0 - None

See page 2 for remote power supply options

Job Name/Date:

Fixture Type Designation:

**RING FINISH COLORS**



**SUGGESTED POWER SUPPLIES**

Tunable White - Remote Drivers

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00548-P</a>	0-10V Dimming (to 10%)	120-277VAC to (500mA), 50W, Class 2	1-2

Static White - Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00195</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	1-1
<a href="#">PPLT00180</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	2-2
<a href="#">PPLT00250</a>	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC to 500mA, 27W, Class 2	2-2

For other power supply options consult factory.

**PHOTOMETRIC DATA**

Note all Photometry is 3000K

Maximum Candela = 370.6

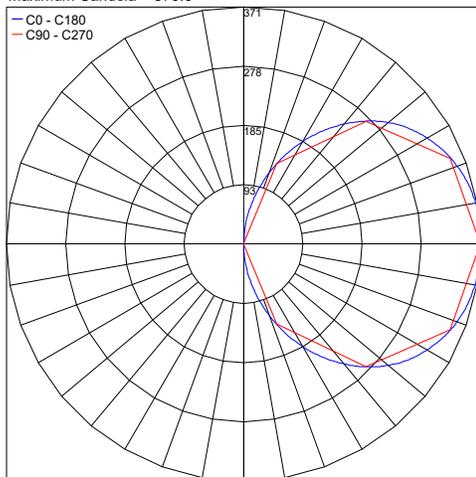

PHOTOMETRIC FILENAME : ZIO-L3011144XC0.IES

**ACCESSORIES**

Controllers (RGBW)



**PPWD00570 - RGBW DMX512+Wifi Controller**

Touch Sensitive  
Can be controlled by WiFi  
Controls 3 zones synchronously and separately

Job Name/Date:

Fixture Type Designation: