

Zio is a round, surface mounted luminaire with an inner ring for installation on walls or ceilings. It is IP65 wet label rated and available in static white (integral or remote driver), tunable white (remote driver), and RGBW with an integral DMX control and driver. The ring can be painted in a contrasting color for visual effect.




MADE IN THE U.S.A.
ADA Compliant

TECHNICAL DATA

| | |
|---------------------------|---|
| Wattage / Input | 13W |
| Power Supply | Integral or Remote Lutron (static white) Integral DMX 120-277VAC (RGBW) Remote Driver 500mA (Tunable White) |
| Dimming | 0-10V Dimming (RGBW is DMX) |
| Construction | Body: Extruded Aluminum Lens: Acrylic |
| CCT | 2700K, 3000K, 3500K, 4000K, RGBW, Tunable White (2700K - 6500K) |
| CRI | >90 |
| Delivered Lumens | 1157 lm (3000K) |
| Efficacy | 89 lm/W (3000K) |
| Finishes | 5 Standard, Custom RAL on request |
| Fixture Dimensions | Ø8.34" x 1.78" |
| Aperature | Ø6.58" |
| Fixture Weight | 2.2 lbs |
| LED Source | Mid Power LED |
| IP Rating | IP65 |

Fixture Dimensions

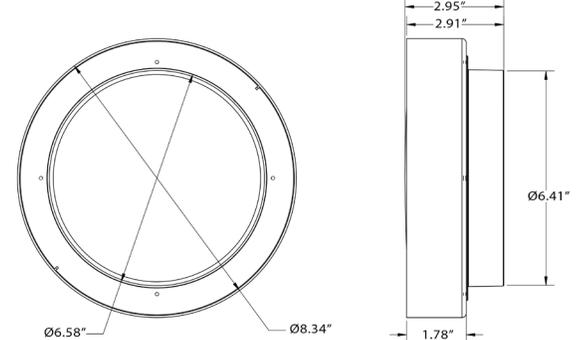

ORDERING INFORMATION


Example: ZIO-L-30-1-TS-SC-X-C-0.

| ZIO-L | - | | - | 1 | - | | - | | - | X | - | | - | 0 |
|---------|--|---------------------|--|---|----------|---|----------|--|---|---|---|--|---|---|
| Model # | CCT | Body | Body Finish | Ring Finish | Lens | Dimming | Options | | | | | | | |
| ZIO-L | 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K RW - RGBW TW - Tunable White (2700K-6500K) | 1 - Surface Mounted | 11 - White Suede 02 - Black Suede 03 - Gray 18 - Tex. Bronze TS - Silver C - Custom | SC - same color as body 11 - White Suede 02 - Black Suede 03 - Gray 22 - Orange 66 - Yellow 33 - Red 44 - Blue C - Custom | X - Opal | C - 120-277VAC 0-10V Dimming Integral (static white) L - Lutron Dimming Remote Driver (Static White) X - Integral DMX Control and Driver (RGBW) R - Remote Driver (Tunable White) | 0 - None | See page 2 for remote power supply options | | | | | | |

Job Name/Date:

Fixture Type Designation:

RING FINISH COLORS

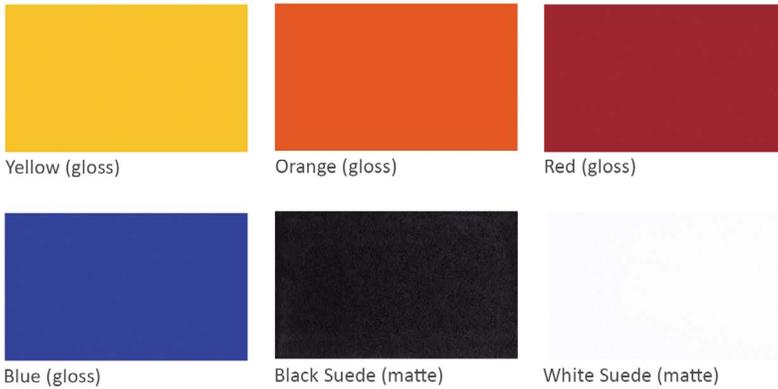

SUGGESTED POWER SUPPLIES

Tunable White - Remote Drivers

| Part Number | Description | Input/Output | # of Fixtures |
|-----------------------------|------------------------|-------------------------------------|---------------|
| PPLT00548-P | 0-10V Dimming (to 10%) | 120-277VAC to (500mA), 50W, Class 2 | 1-2 |


Static White - Lutron Compatible

| Part Number | Option | Lutron SKU | Dim Range | Description | Input/Output | # of Fixtures |
|---------------------------|----------------|------------|-----------|---|------------------------------------|---------------|
| PPLT00195 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA , 19W, Class 2 | 1-1 |
| PPLT00180 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA , 27W, Class 2 | 2-2 |
| PPLT00250 | LTEA2W | LTEA | 100%-1% | Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only) | 120VAC to 500mA, 27W, Class 2 | 2-2 |

For other power supply options consult factory.

PHOTOMETRIC DATA

Note all Photometry is 3000K

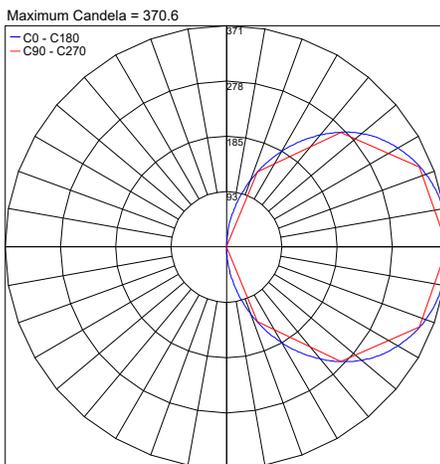

Job Name/Date:

Fixture Type Designation: