


BIBA IP54

BATHROOM

Biba is a recessed luminaire made of Calcyt® plaster for use in walls as orientation lighting. It is available in an indoor (IP20), bathroom (IP54) or outdoor (IP54) versions. Biba has a trimless opaline cover that sits flush with the wall to provide the best aesthetics and can be directly installed in solid walls as well as in gypsum with an optional plasterkit.



Wall Cut-Out: 6.65" x 3.23"
Fixture Dimensions

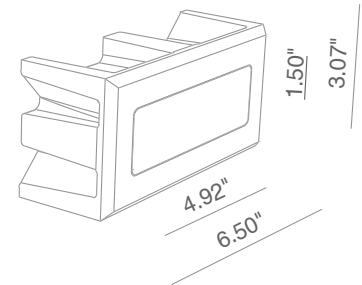

TECHNICAL DATA

Wattage / Input	1W, 2W, 4W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Calcyt® Plaster Lens: Frosted Diffuser
CCT	2200K, 2700K, 3000K, 4000K, Royal Blue
CRI	>80 and >90
Optics	Fixed
Delivered Lumens	25 lm (1W), 74 lm (2W), 140 lm (4W) <i>All are 3000K</i>
Efficacy	25 lm/W (1W), 37 lm/W (2W), 35 lm/W (4W)
Finishes	Paintable Plaster
Cut-Out Dimensions	6.65" x 3.23"
Fixture Dimensions	6.50" w x 3.07" h x 2.36" deep
Aperature	4.92" x 1.50"
Color Consistency	3-Step MacAdam
IP Rating	IP54

ORDERING INFORMATION

Example: 123 62 201. Accessories / Power Supplies ordered separately.

Model No.	Description
123 60 501 - 2200K	1W, 100 lm, CRI 80, IP54 Bathroom
123 60 001 - 2700K	1W, 100 lm, CRI 90, IP54 Bathroom
123 60 101 - 3000K	1W, 100 lm, CRI 90, IP54 Bathroom
123 60 201 - 4000K	1W, 100 lm, CRI 90, IP54 Bathroom
123 60 301 - Royal Blue	1W, 100 lm, IP54 Bathroom
123 62 501 - 2200K	2W, 200 lm, CRI 80, IP54 Bathroom
123 62 001 - 2700K	2W, 200 lm, CRI 90, IP54 Bathroom
123 62 101 - 3000K	2W, 200 lm, CRI 90, IP54 Bathroom
123 62 201 - 4000K	2W, 200 lm, CRI 90, IP54 Bathroom
123 62 301 - Royal Blue	2W, 200 lm, IP54 Bathroom

Job Name/Date:

Model No.	Description
123 61 501 - 2200K	4W, 400 lm, CRI 80, IP54 Bathroom
123 61 001 - 2700K	4W, 400 lm, CRI 90, IP54 Bathroom
123 61 101 - 3000K	4W, 400 lm, CRI 90, IP54 Bathroom
123 61 201 - 4000K	4W, 400 lm, CRI 90, IP54 Bathroom
123 61 301 - Royal Blue	4W, 400 lm, IP54 Bathroom

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA


Part Number	Description	Input/Output	# of Fixtures		
			1W	2W	4W
PPLT00138	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-3	1-1	N/A
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	4-13	2-6	1-3
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2	1-19	1-9	1-4
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-19	1-9	1-4
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-80	1-40	1-20

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures		
						1W	2W	4W
PPLT00252	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driv. (120V forward phase only)	120VAC to 350mA, 7W, Class 2	3-6	2-3	1-1
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 7W, Class 2	3-6	2-3	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 13W, Class 2	6-13	3-6	2-3
PPLT00271	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driv. (120V forward phase only)	120VAC to 350mA, 13W, Class 2	6-13	3-6	2-3
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 19W, Class 2	11-18	6-9	3-4
PPLT00220	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driv. (120V forward phase only)	120VAC to 350mA, 19W, Class 2	11-18	6-9	3-4

For other power supply options consult factory.

ACCESSORIES - Installation



723 01 000
Outer Casing
Housing: perforated aluminum

Job Name/Date:

Fixture Type Designation:

BIBA IP54


BATHROOM

PHOTOMETRIC DATA

Note all Photometry is 3000K


1W

Maximum Candela = 8.97

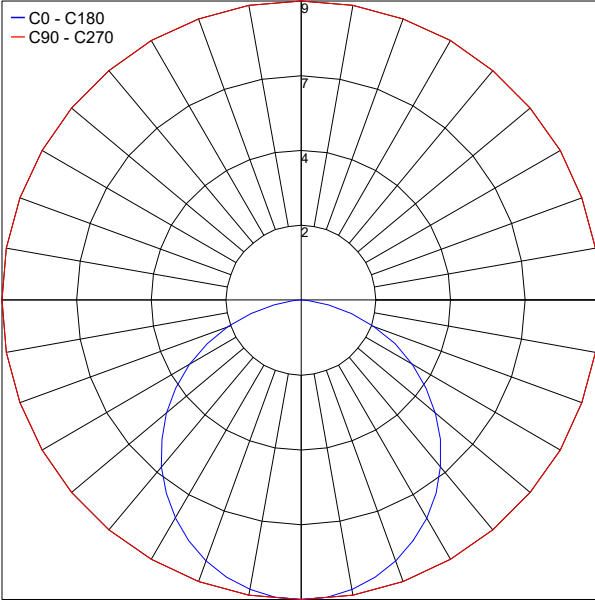


2W

Maximum Candela = 26.4

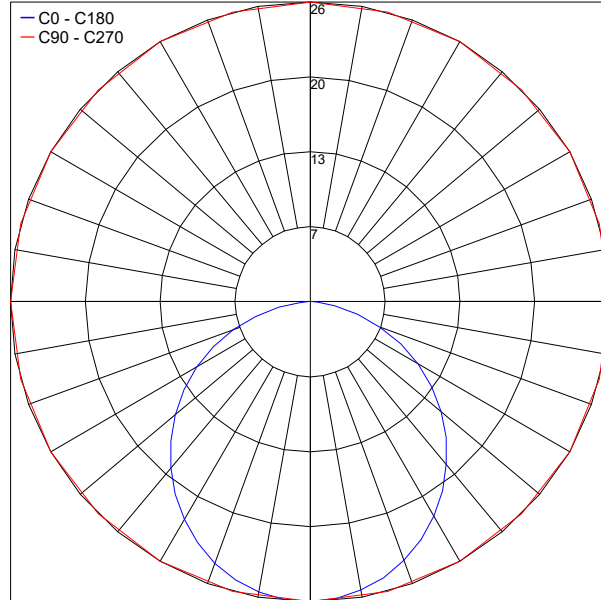

4W

Maximum Candela = 50.2

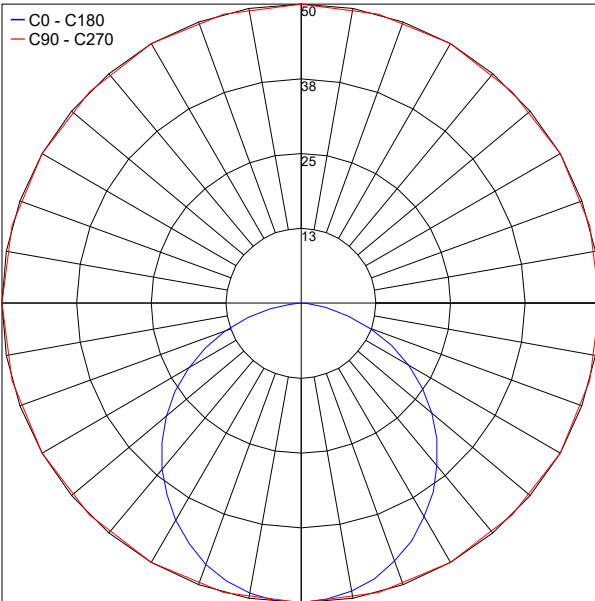

Job Name/Date:

Fixture Type Designation: