


BRIGHT 1.9

The Bright 1 series are small, powerful and versatile fixtures. Available in numerous optics, styles and anti-glare accessories, this fixture can be installed in-grade, wall mount or ceiling mount. **The Bright 1, Smoothy 1 and Litus 1 series all use the same LED.**



Cutout Dimensions for ceiling/wall installations with fixing spring = Ø 1.18"

Fixture Dimensions

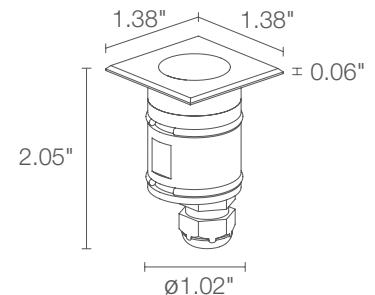

TECHNICAL DATA

Wattage / Input	1.2W (12VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body/Trim: AISI 316L Stainless Steel Lens: Tempered Transparent or Frosted Glass Cable Length: 4.92' standard
CCT	RGB
CRI	>80
Delivered Lumens	11 lm: (R) 3 lm, (G) 6 lm, (B) 2 lm (diffuse transparent lens)
Efficacy	9.2 lm/W (diffuse transparent lens)
Optics	2 Standard (see below)
Finishes	Stainless Steel, Custom RAL
Fixture Dimensions	1.38" l x 1.38" w x 2.05" h
Cut-out Size	Ø1.18" (for ceiling or wall installations)
Fixture Weight	0.77 lbs
LED Source	1 Mid-Power LED Full-Color
Lumen Maintenance	50,000 hrs L90, B10 (Ta 25°C)
Color Consistency	--
Operating Temp.	-4°F to +113°F
IP Rating	IP68
IK Rating	IK10

ORDERING INFORMATION

Example: CB1900DSI-2. Accessories / Power Supplies ordered separately.

CB1900	6			
Model No.	CCT	Optics	Finish	Cable Length
CB1900	6 - RGB	DT - Diffuse Transparent DS - Diffuse Sandblasted	I - Stainless Steel C - Custom RAL (consult factory for "C")	4.92' standard 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


12VDC - RGB

Part Number	Description	Input/Output	# of Fixtures
PPLT00288	DMX / RDM (Field Addressable) / DALI	120-277VAC to 12VDC, 100W, Class 2	1 - 66

For other power supply options consult factory.

ACCESSORIES


Installation

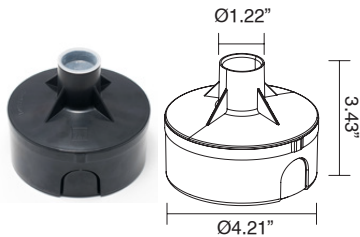

WC0202
Outer Casing




WG0301
Fixing Spring
For ceiling/wall use




PPMP02674
Core Drilled
Application Sleeve

PHOTOMETRIC DATA

DT - Transparent diffuse

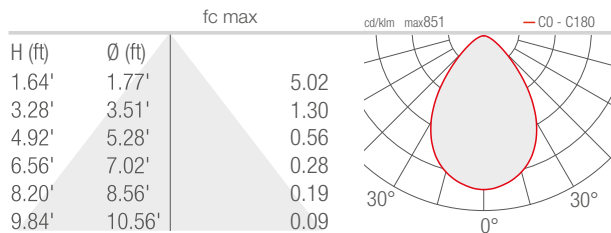

DS - Sandblasted diffuse

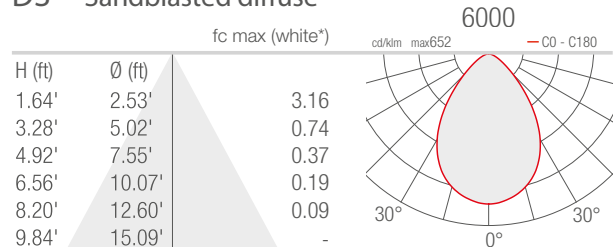

Job Name/Date:

Fixture Type Designation: