


# BRIGHT 2.6

Installation	recessed for outdoor applications (not suitable for immersion in swimming pools and fountains)
Mounting	recessed (ceiling, wall, floor)
Material	body in anodized aluminum, trim in AISI 316L stainless steel or aluminum (only Bright 2.6), lens in tempered glass
Finishes	Bright 2.6: stainless steel, grey
No. and type of LED	3 power LEDs
Nom. power consumption	6W (3 power LEDs x 2W)
Power supply	12VDC, 24VDC
Power supply unit	not included
Total delivered lumens	314 lm (3000K)
Optics	10°, 24°, 38°, diffuse
LED color	white: 2700K, 3000K, 4000K, 5000K; blue
Ingress protection	IP68
Impact resistance	IK10

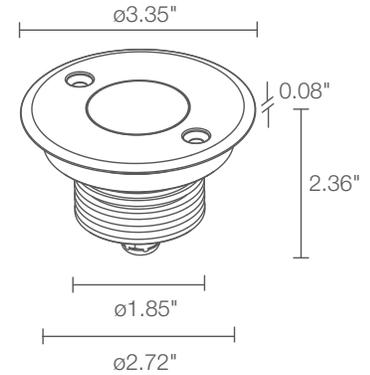

6W - 12/24VDC

**CB2632** ■ ■ **A I** Stainless steel

**CB2632** ■ ■ **A F** Grey

■ LED Color

■ Optics

**0** - 5000K

**D** - Diffuse

**1** - Blue

**L** - 38°

**5** - 3000K


**M** - 24°

**9** - 4000K

**S** - 10°

**F** - 2700K


## Accessories




**WC0100**  
Outer casing




**WG0100**  
Fixing springs



**WC0103**  
Outer casing



**WH0201\***  
Honeycomb louvre

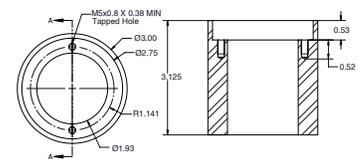

**PPMP03088**  
Core Drilled Application Sleeve

Job Name:

Fixture Type:

Last Modified:



sales@designplan.com  
www.designplan.com