

BULL



ADJUSTABLE AND EXTRACTABLE FROM RECESSED FITTING.

An eye focused on an element to be enhanced, on a decor to be exalted: Bull, an indoor totally disappearing recessed luminaire, installable on plasterboard ceilings, is composed by a Coral® body, a rear black-colored steel case provided with an adjustable spotlight, which can be extracted from the recess in order to redirect luminescent beams in a more precise way. The rear spotlight, designed for having a minimal visual impact, is 360° orientable on the horizontal line and 90° on the vertical one. With Bull, lighting means giving prominence to precise elements, defining spaces and setting new interchangeable optical perspectives.




79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

Recessed

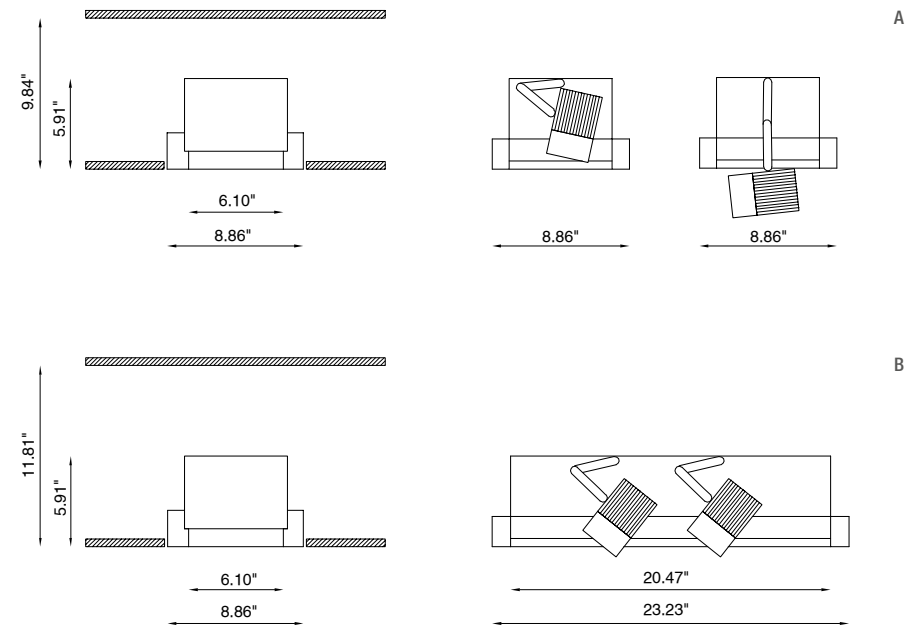


TECHNICAL FEATURES

Code	BU1811.00 (fig.A)	BU1812.00 (fig.B)
Type	Tilttable downlight ± 360° / ± 90° 	Tilttable downlight ± 360° / ± 90°
Material	00: Coral®	00: Coral®
Weight	9.92 lbs	15.43 lbs
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Control gear	Constant current electronic driver (not included)	Constant current electronic driver (not included)
Cut out for plasterboard	9.25" x 9.25"	9.25" x 23.62"
Lamp type	LED 700mA ⚡ Vf: 37 VDC	LED 700mA ⚡ Vf: 2 x 37 VDC
Lamp wattage	1 x 26W	2 x 26W
Luminous efficacy	3500 lm - 3000K	2 x 3500 lm - 3000K
Light distribution	Beam 24° Beam 38° (on request)	Beam 24° Beam 38° (on request)
Fitting	-	-
Light color	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	6.10" x 6.10"	6.10" x 20.47"
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90





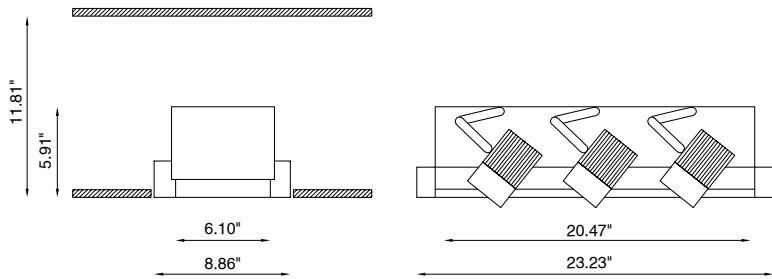

SUPERFUTUREDESIGN™



C

TECHNICAL FEATURES

Code	BU1813.00 (fig. C)
Type	Tilttable downlight ± 360° / ± 90°   
Material	00: Coral®
Weight	22.05 lbs
Mounting	Ceiling recessed
IP rating	IP40
Control gear	Constant current electronic driver (not included)
Cut out for plasterboard	9.25" x 23.62"
Lamp type	LED 700 mA  Vf: 3 x 37 VDC
Lamp wattage	3 x 26W
Luminous efficacy	3 x 3500 lm - 3000K
Light distribution	Beam 24° Beam 38° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Light hole	6.10" x 20.47"
Voltage connection	By driver (optional)
CRI	>90