



designplan™ 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

CAMEO

INDOOR RECESSED DOWNLIGHTS
FALSE CEILINGS AND NICHES IN PRIVATE HOMES



2700K 3000K 4000K

FIXED OPTICS AND FIXED FOCUS



narrow medium wide elliptical

Ø1.54"



CAMEO 1.0
1.5W 500mA
constant current

CAMEO 1.6
2.5W 24VDC
constant voltage

Ø1.93"



CAMEO 2.6
5W 24VDC
constant voltage

TILTABLE OPTICS AND FIXED FOCUS



narrow medium wide elliptical

Ø2.28"



CAMEO 1.1
1.5W 500mA
constant current


CAMEO 1.7
2.5W 24VDC
constant voltage

Ø2.72"



CAMEO 2.7
5W 24VDC
constant voltage

TILTABLE ZOOM LENS



Ø2.28"



CAMEO 1.2
1.5W 500mA
constant current

CAMEO 1.8
2.5W 24VDC
constant voltage

Ø2.72"





CAMEO 2.8
5W 24VDC
constant voltage

CAMEO 1

✓
CAMEO 1.1
3000K, 1.5W, 29°, black




CAMEO 1.0

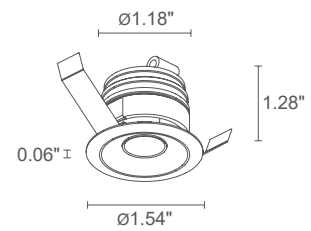

MODEL NO.	1.5W 500mA CM10201000 ■ O ■ E White CM10201000 ■ O ■ N Black
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 17° M - 29° P - 48° sharp L - 52° W - 16°x34°
LUMEN OUTPUT AT SOURCE	157 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	144 lm (3000K, 500mA, 29°)
NO. AND TYPE OF LED	1 power LED, 1/4 ANSI BIN 50000h L90 B10 (Ta 25°C)
MATERIAL	body and trim in aluminum
POWER SUPPLY UNIT	remote power supply required, not included
WIRING	series
MOUNTING	recessed (ceilings, false ceilings, niches in plasterboard)
FEATURES	CRI >90



CAMEO 1.1

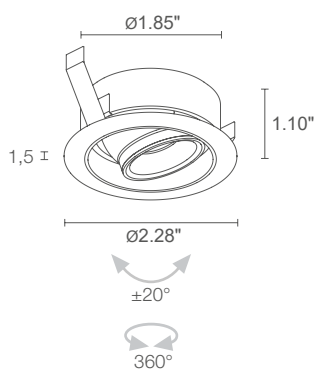

LED TECH 0.15 lbs IP40



1.5W 500mA
CM11201000 ■ **0** ■ **E** White
CM11201000 ■ **0** ■ **N** Black

■ **F** - 2700K
■ **5** - 3000K
■ **9** - 4000K

■ **S** - 17° tiltable ±20°
■ **M** - 29° tiltable ±20°
■ **P** - 48° sharp tiltable ±20°
■ **L** - 52° tiltable ±20°
■ **W** - 16°x34° tiltable ±20°

157 lm (3000K, 500mA)

144 lm (3000K, 500mA, 29°)

1 power LED, 1/4 ANSI BIN
 50000h L90 B10 (Ta 25°C)

body and trim in aluminum

remote power supply required, not included


series

recessed (ceilings, false ceilings, niches in plasterboard)

CRI >90



CAMEO 1.2

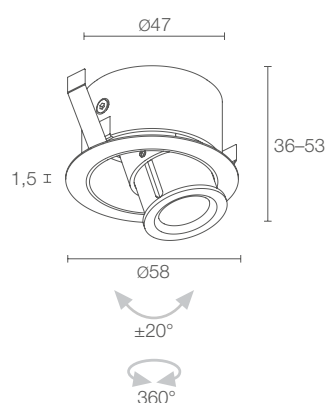

LED TECH 0.15 lbs IP40



1.5W 500mA
CM12201000 ■ **R1** ■ **E** White
CM12201000 ■ **R1** ■ **N** Black

■ **F** - 2700K
■ **5** - 3000K
■ **9** - 4000K

optical range 8°-40° tiltable ±20°

157 lm (3000K, 500mA)

50 lm (3000K, 500mA, 40°)

1 power LED, 1/4 ANSI BIN
 50000h L90 B10 (Ta 25°C)


body and trim in aluminum

remote power supply required, not included

series

recessed (ceilings, false ceilings, niches in plasterboard)

CRI >90




CAMEO 1

✓
CAMEO 1.8
 3000K, 2.5W, tiltable zoom lens 8°-40°, black




CAMEO 1.6

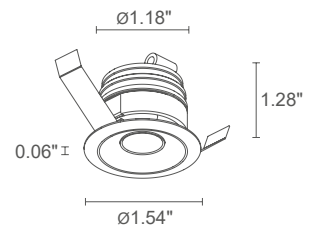

MODEL NO.	2.5W 24VDC CM16001000 ■ 0 ■ E White CM16001000 ■ 0 ■ N Black
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 17° M - 29° P - 48° sharp L - 52° W - 16°x34°
LUMEN OUTPUT AT SOURCE	157 lm (3000K)
DELIVERED LUMEN OUTPUT	144 lm (3000K, 29°)
NO. AND TYPE OF LED	1 power LED, 1/4 ANSI BIN 50000h L90 B10 (Ta 25°C)
MATERIAL	body and trim in aluminum
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	recessed (ceilings, false ceilings, niches in plasterboard)
FEATURES	CRI >90



CAMEO 1.7

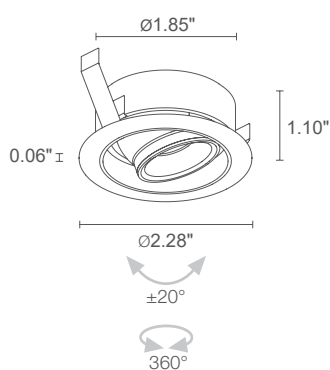

2.5W 24VDC
CM17001000 **0** **G** **E** White
CM17001000 **0** **G** **N** Black

F - 2700K
5 - 3000K
9 - 4000K

S - 17° tiltable ±20°
M - 29° tiltable ±20°
P - 48° sharp tiltable ±20°
L - 52° tiltable ±20°
W - 16°x34° tiltable ±20°

157 lm (3000K)

144 lm (3000K, 29°)

1 power LED, 1/4 ANSI BIN
 50000h L90 B10 (Ta 25°C)

body and trim in aluminum


remote power supply required, not included

recessed (ceilings, false ceilings, niches in plasterboard)

CRI >90



CAMEO 1.8

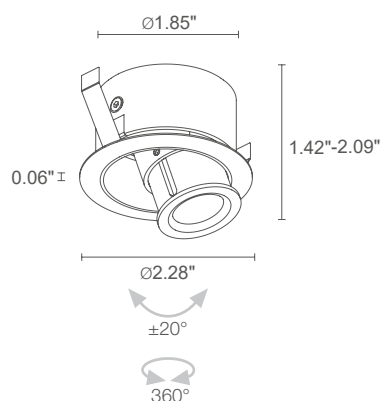

2.5W 24VDC
CM18001000 **R1** **E** White
CM18001000 **R1** **N** Black

F - 2700K
5 - 3000K
9 - 4000K

optical range 8°-40° tiltable ±20°

157 lm (3000K)

50 lm (3000K, 40°)

1 power LED, 1/4 ANSI BIN
 50000h L90 B10 (Ta 25°C)

body and trim in aluminum

remote power supply required, not included

recessed (ceilings, false ceilings, niches in plasterboard)


CRI >90

CAMEO 2

✓
CAMEO 2.6
 3000K, 5W, 17°, black




CAMEO 2.6

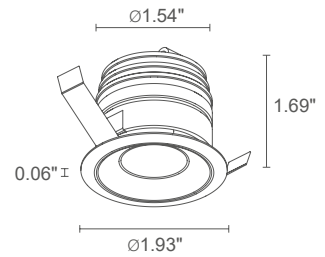

MODEL NO.	5W 24VDC CM26001000 ■ ■ E White CM26001000 ■ ■ N Black
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° M - 17° P - 19° sharp L - 32° J - 65° W - 13°x43°
LUMEN OUTPUT AT SOURCE	452 lm (3000K)
DELIVERED LUMEN OUTPUT	303 lm (3000K, 32°)
NO. AND TYPE OF LED	1 high intensity power LED, 3-step MacAdam 50000h L95 B10 (Ta 25°C)
MATERIAL	body and trim in aluminum
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	recessed (ceilings, false ceilings, niches in plasterboard)
FEATURES	CRI >90



CAMEO 2.7

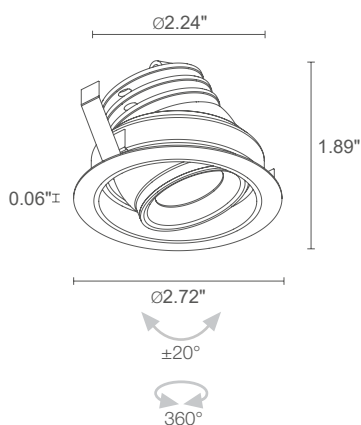

Ø 2.56"



5W 24VDC
CM27001000 ■ 0 ■ E White
CM27001000 ■ 0 ■ N Black

■ **F** - 2700K
5 - 3000K
9 - 4000K

■ **S** - 11° tiltable ±20°
M - 17° tiltable ±20°
P - 19° sharp tiltable ±20°
L - 32° tiltable ±20°
J - 65° tiltable ±20°
W - 13°x43° tiltable ±20°

452 lm (3000K)

303 lm (3000K, 32°)

1 high intensity power LED, 3-step MacAdam
 50000h L95 B10 (Ta 25°C)

body and trim in aluminum


remote power supply required, not included

recessed (ceilings, false ceilings, niches in plasterboard)

CRI >90



CAMEO 2.8

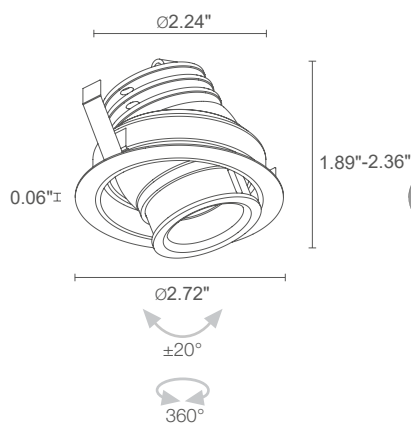

Ø 2.56"



5W 24VDC
CM28001000 ■ R1 ■ E White
CM28001000 ■ R1 ■ N Black

■ **F** - 2700K
5 - 3000K
9 - 4000K

optical range 8°-58° tiltable ±20°

452 lm (3000K)

241 lm (3000K, 58°)


1 high intensity power LED, 3-step MacAdam
 50000h L95 B10 (Ta 25°C)

body and trim in aluminum

remote power supply required, not included

recessed (ceilings, false ceilings, niches in plasterboard)

CRI >90

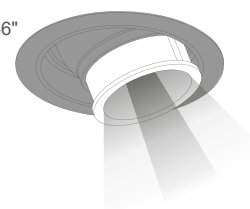

CAMEO

✓
CAMEO 2.8
3000K, 5W, tiltable zoom lens 8°-58°, white

