



Technical features

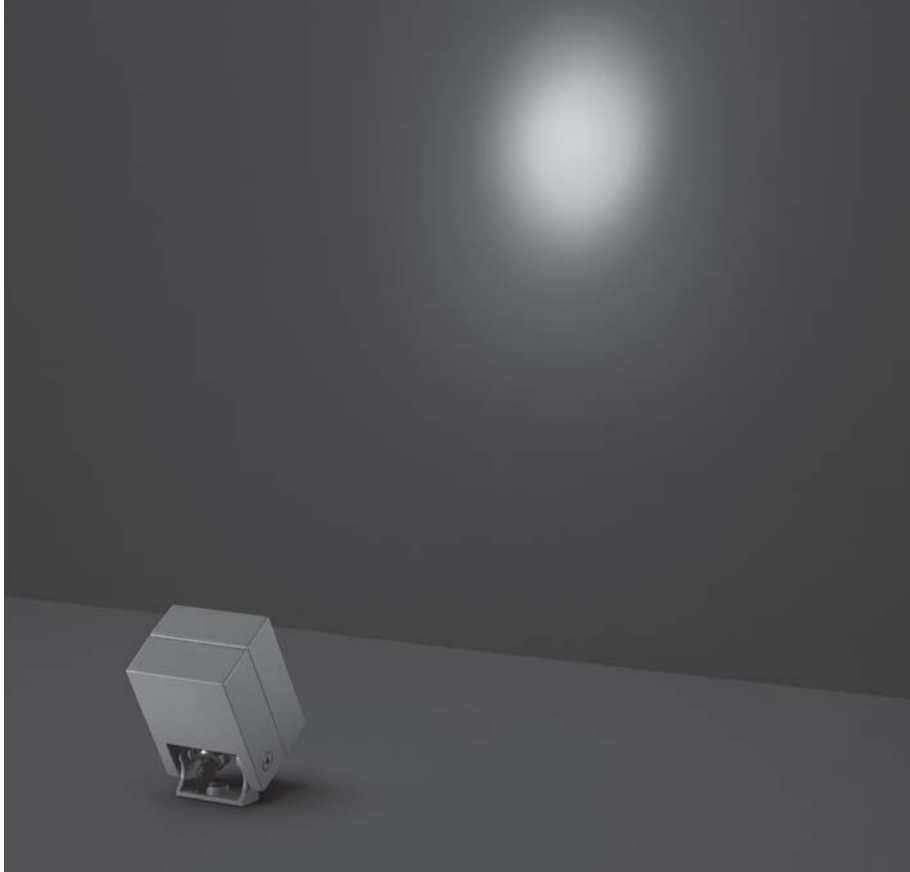

101001P

CASE MICRO

Square small floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 1 CREE XP-G2 LED. IP65 rating.




light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	115	115.00
high-power led	30°	110	110.00
high-power led	45°	104	104.00
4000°K neutral-white			
high-power led	10°	120	120.00
high-power led	30°	114	114.00
high-power led	45°	109	109.00

Technical data

Wattage	1W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 1 x 1W CREE "XP-G2" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Nickel-plated brass cable gland PG9
Power cable	3.28' neoprene power cable included
Gross weight	1.10 lbs

101002P - with EXTENDED FIXING BRACKET OPTION

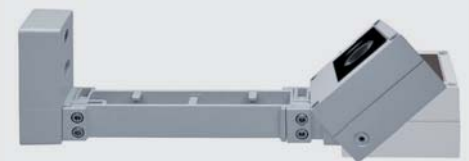


AC001 HEARTH SPIKE



Finish color options:





Technical features

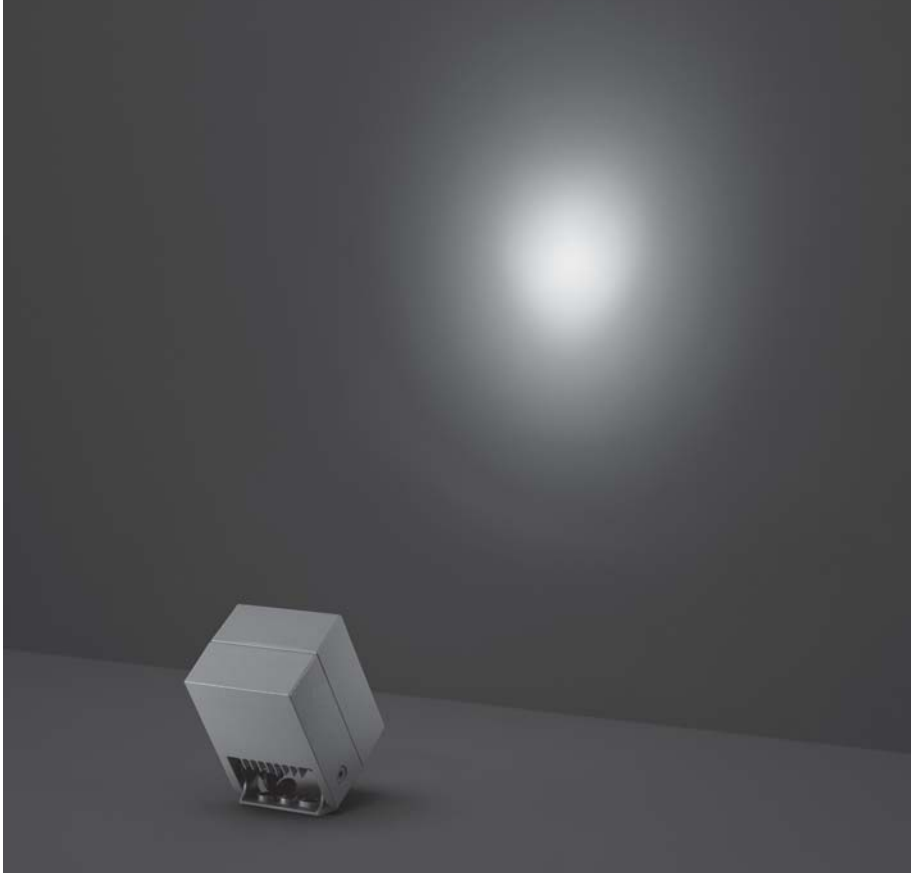





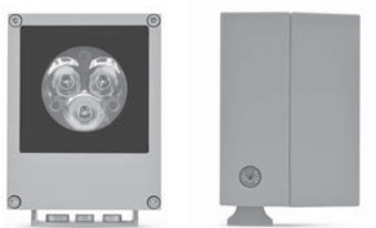

101003P

CASE MINI

Square small floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 3 CREE XP-G3 LED. IP65 rating.



light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	 10°	346	115.33
high-power led	 30°	329	109.66
high-power led	 45°	312	104.00
4000°K neutral-white			
high-power led	 10°	360	120.00
high-power led	 30°	342	114.00
high-power led	 45°	325	108.33

Finish color options:



Technical data

Wattage	3W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 3 x 1W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Nickel-plated brass cable gland PG9
Power cable	3.28' neoprene power cable included
Gross weight	1.76 lbs

101004P - with EXTENDED FIXING BRACKET OPTION



AC001 HEARTH SPIKE



Technical features





Technical data

Wattage	8W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 5 x 1.5W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	4.41 lbs

101006P

CASE MEDIUM

Square floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 5 CREE XP-G3 LED. IP65 rating.



SHORT FIXING BRACKET









MEDIUM FIXING BRACKET



BOTH included in the standard package

101007P - EXTENDED FIXING BRACKET OPTION




light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	 10°	720	90.00
high-power led	 30°	684	85.50
high-power led	 45°	650	81.25
4000°K neutral-white			
high-power led	 10°	750	93.75
high-power led	 30°	713	89.13
high-power led	 45°	677	84.63



Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matte Black (on request)

Technical features




Technical data

Wattage	12W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 8 x 1.5W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	11.46 lbs

101008P

CASE MAXI

Square floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 8 CREE XP-G3 LED. IP65 rating.



SHORT FIXING BRACKET









MEDIUM FIXING BRACKET



BOTH included In the standard package

101009P - EXTENDED FIXING BRACKET OPTION



light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	 10°	1,152	96.00
high-power led	 30°	1,095	91.25
high-power led	 45°	1,040	86.67
4000°K neutral-white			
high-power led	 10°	1,200	100.00
high-power led	 30°	1,140	95.00
high-power led	 45°	1,083	90.25

Finish color options:



Technical features



Technical data


Wattage	30W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 20 x 1.5W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	11.46 lbs



101014P

CASE MAXI-20

Square floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 20 CREE XP-G3 LED. IP65 rating.



SHORT FIXING BRACKET



MEDIUM FIXING BRACKET



BOTH included in the standard package

101014P - EXTENDED FIXING BRACKET OPTION




light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	2,880	96.00
high-power led	30°	2,736	91.20
high-power led	45°	2,600	86.67
4000°K neutral-white			
high-power led	10°	3,000	100.00
high-power led	30°	2,850	95.00
high-power led	45°	2,708	90.26

Finish color options:

-  Textured Grey RAL 9006
-  Anthracite Grey RAL 7016
-  Matte Black (on request)



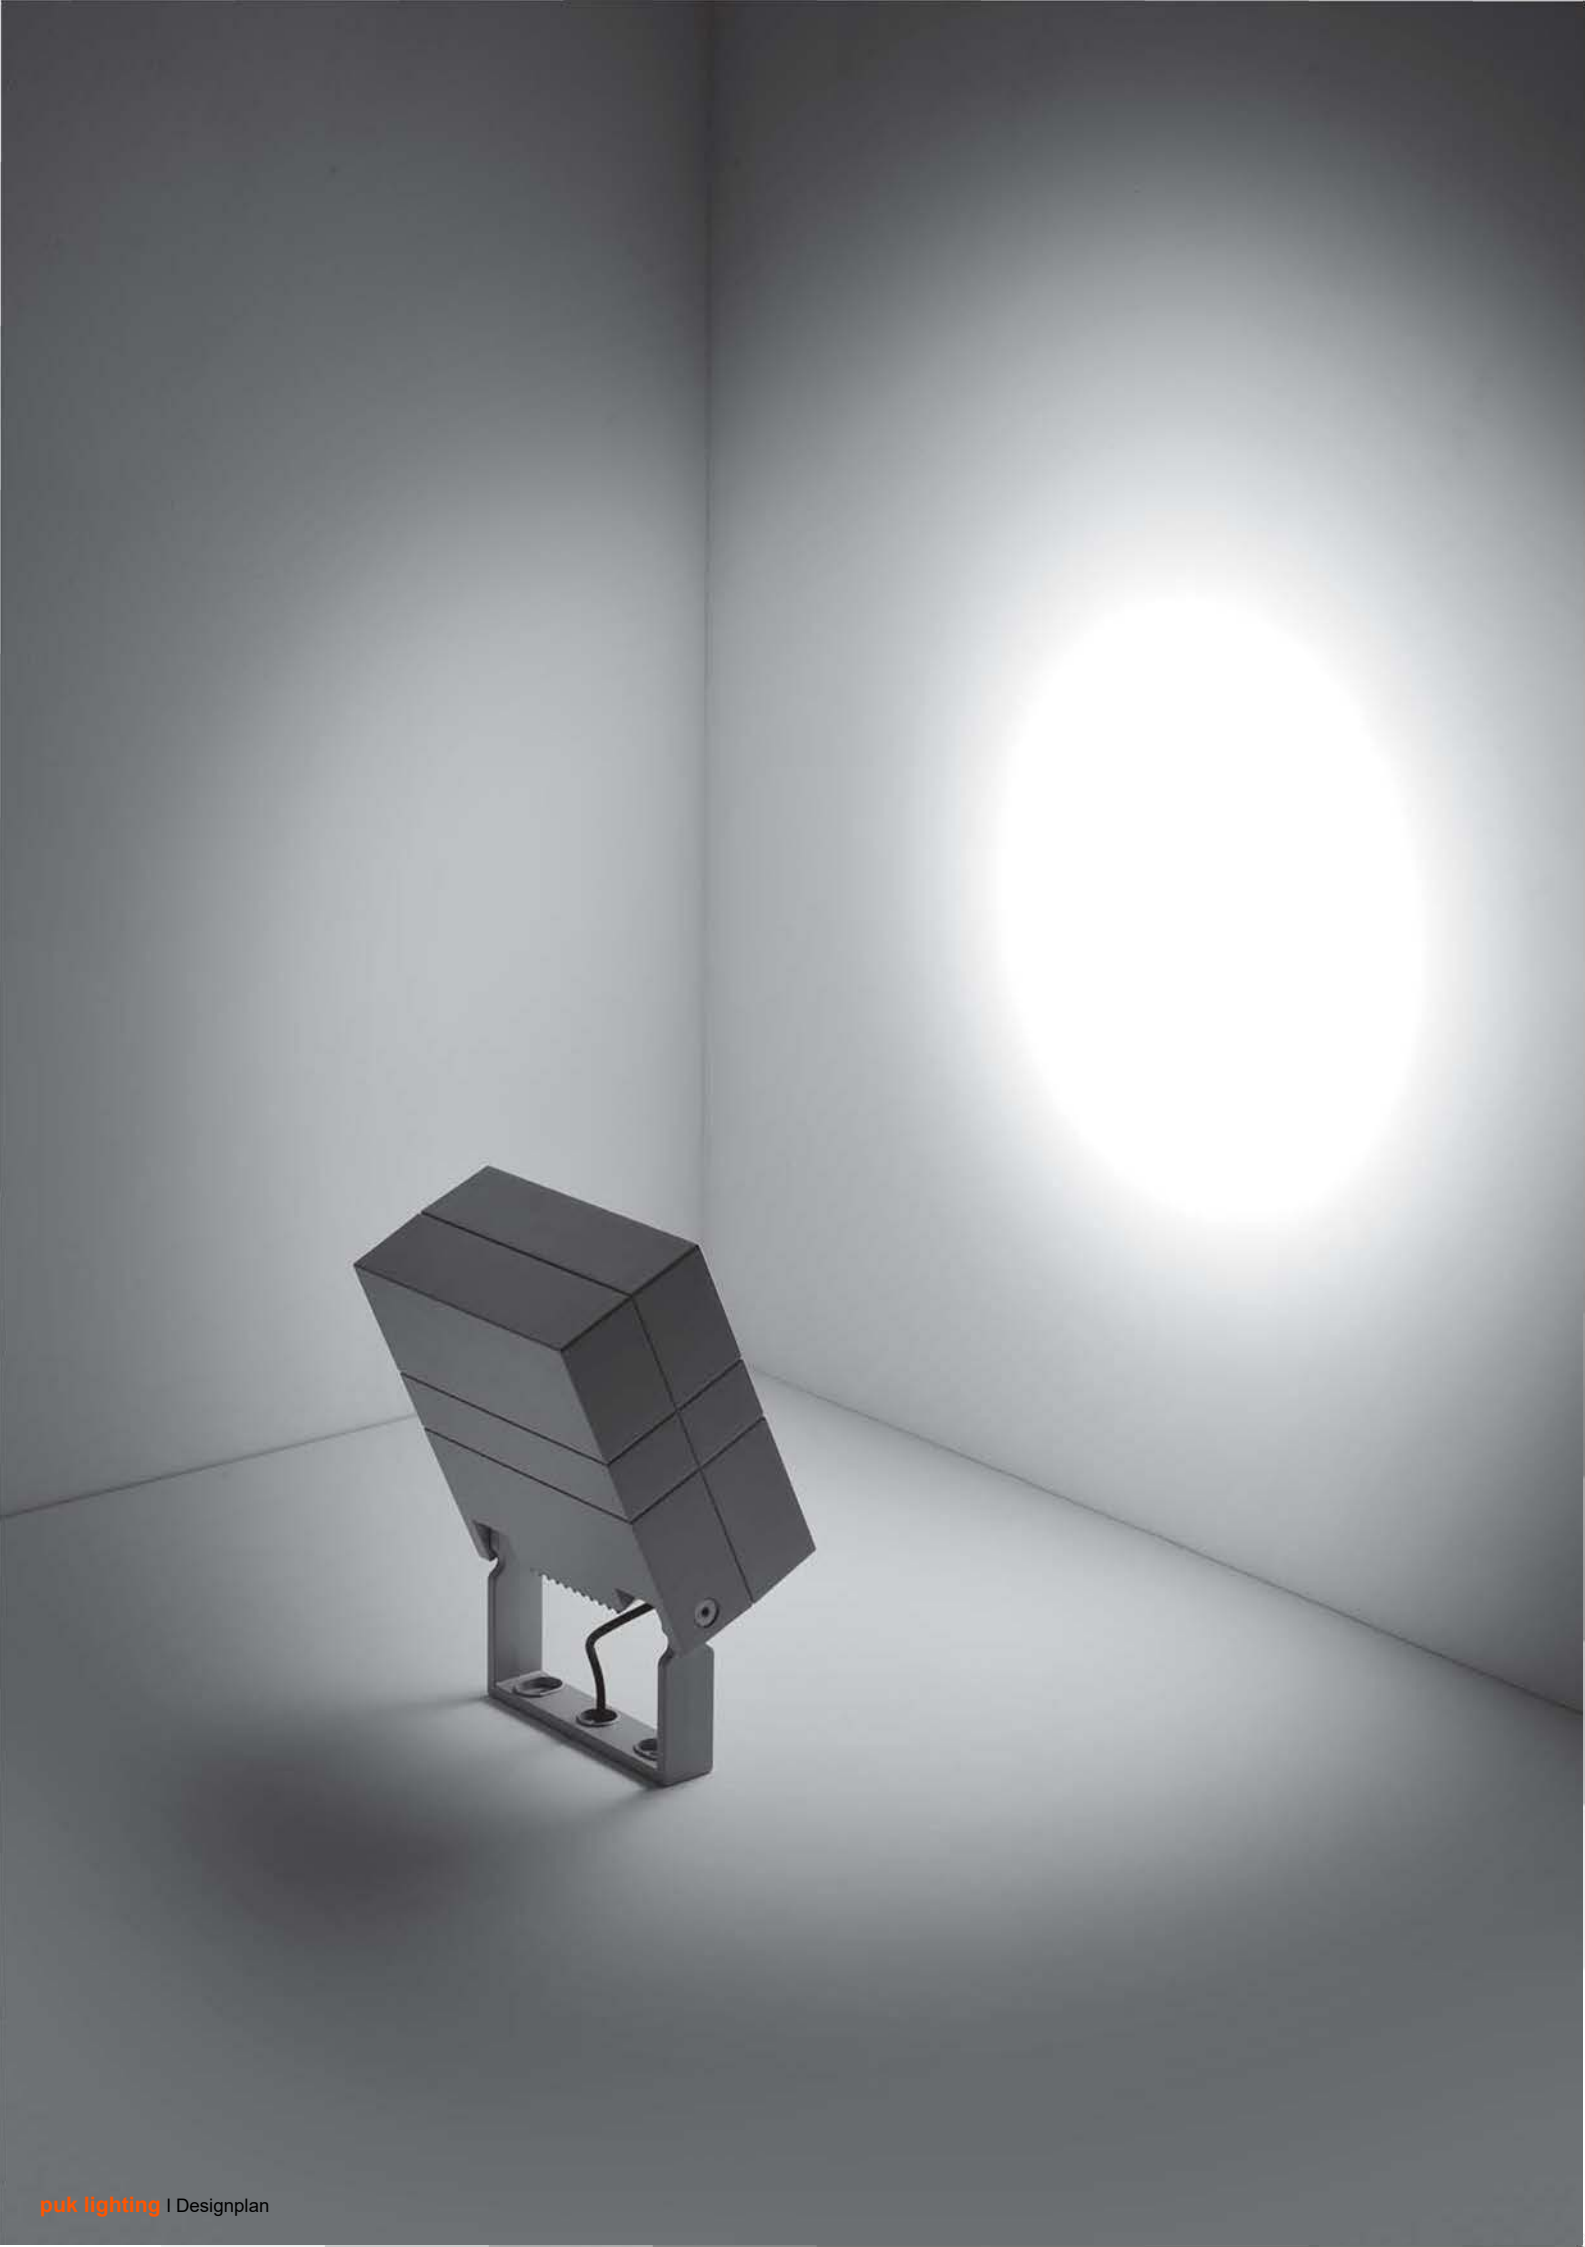

Technical features




Technical data

Wattage	50W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 20 CREE "XP-L" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	11.46 lbs

101016P

CASE MAXI-20 PRO

Square floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 20 CREE XP-L LED. IP65 rating.



SHORT FIXING BRACKET






MEDIUM FIXING BRACKET



BOTH included in the standard package

101016P - EXTENDED FIXING BRACKET OPTION



light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	 10°	4,900	98.00
high-power led	 30°	4,650	93.00
high-power led	 45°	4,420	88.40

* Other light colors available on request: Neutral-White

Finish color options:



