



Technical features


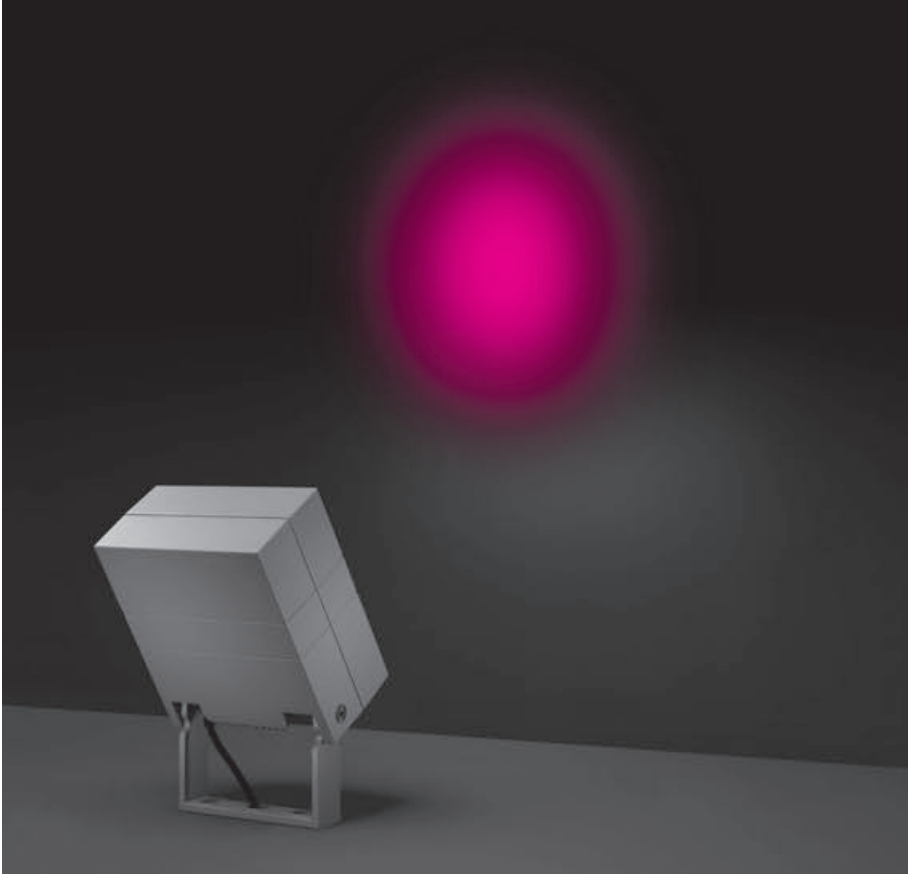


101008RGBWP

CASE MAXI DMX RGBW




Square floodlight for outdoor installation on a façade/wall. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws.

Built-in LED driver, DMX driver integrated; with 6 x CREE "XML" RGBW LED. IP65 rating.



DMX ACCESSORIES CONTROLLERS, SPLITTERS, ETC...

To be defined together with puk technical department, according to project specifications and after providing installation details.

light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
RGBW			
high-power led	 12°	1,000	35.71
high-power led	 25°	992	35.43
high-power led	 35°	981	35.04

Technical data

Wattage	28 WATT
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	6 x CREE "XML" COLOR RGBW LED
Screws	Stainless steel
DMX	DMX interface integrated
Transformer	Remote electrical power supply
Gasket	Silicone rubber
Glass	Tempered
Power cable	3.28' power cable included
DMX cable	DMX IN cable included
Gross weight	11.02 lbs

Finish color options:

-  Textured Grey RAL 9006
-  Anthracite Grey RAL 7016
-  Matte Black (on request)