



LM05 CONCRETE

design: R&D

LAM32
IDEAS BECOMING LIGHT

Luminaire designed for floor installation, suitable for LED source. It is made of an internal load-bearing structure in stainless steel englobed in concrete with high mechanical resistance. The product is incredibly shockproof and has a great resistance to acts of vandalism. LED module is made of anodized aluminum to ensure inalterability over time and maximum resistance against atmospheric agents. Transparent diffuser is in PMMA (acrylic). Luminaire's installation is allowed thanks to screws for direct fixing to the floor or appropriate flush fixing counter-plate in steel sheet with anchor bolts for concrete planting. The protection degree IP66 is ensured by a special waterproof cable gland. It is equipped with a 19.7" long neoprene cable for connection to the power supply line, through appropriate waterproof connection systems to be ordered separately.



designplan™ 

79 Trenton Avenue
Frenchtown, NJ 08825


www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042


LM05 CONCRETE




TECHNICAL DRAWING



10.24" x 3.94" x H19.69"



18.11" x 3.94" x H19.69"






25.98" x 3.94" x H19.69"

LM05 CONCRETE

model	code	lamp	lumens	
			3000K	4000K
CONCRETE 1	LM05.101205.US	MULTILED VDC 4.8W	588	622
CONCRETE 2	LM05.101206.US	MULTILED VDC 9.6W	1176	1243
CONCRETE 3	LM05.101207.US	MULTILED VDC 14.4W	1764	1865

ACCESSORIES


ANCHOR PLATE

	code	size
	LM20.101208	10.24" x 3.94" x H5.12"
	LM20.101209	18.11" x 3.94" x H5.12"
	LM20.101210	25.98" x 3.94" x H5.12"

EXAMPLE OF CODE COMPOSITION

Electronic driver 24VDC. Connection systems to be ordered as accessories.

LM05.101205.US.08.DI.BF

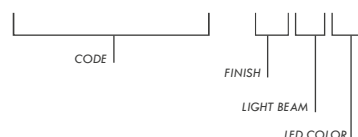

Light beam

.DI	diffuse
LED Color	
.BP	3000K
.BF	4000K

FINISH

color	code
	.08 / cement

