


DOT



Dot, available with 1, 3 or 5 light sources, is a lamp containing an innovative parabola which grants an anti-reflection effect and LED sources of high illumination intensity. It is an indoor luminaire made of AirCoral® and installable on ceilings which takes maximum advantage from technological research, guaranteeing the most complete customization of the form and inclination of the internal parabola. The product is available with different lens which allow the adaptation to any types of architectonic projects and necessities.

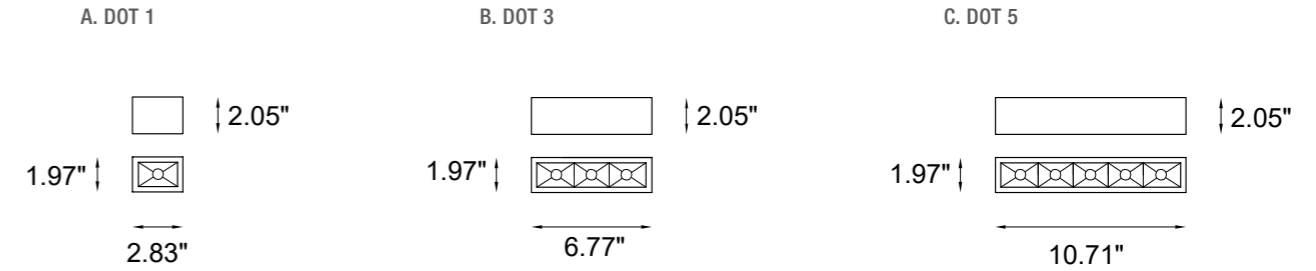

TECHNICAL FEATURES

Code	BU1911.AC.US (fig. A)	BU1913.AC.US (fig. B)	BU1915.AC.US (fig. C)
Type	Ceiling lamp	Ceiling lamp	Ceiling lamp
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	9.47 ft²	23.68 ft²	37.89 ft²
Mounting	Ceiling mounting	Ceiling mounting	Ceiling mounting
IP rating	IP20	IP20	IP20
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)
Lamp type	LED 500mA	LED 500mA	LED 500mA
Lamp wattage	1 x 1.5W	3 x 1.5W	5 x 1.5W
Luminous efficacy	1 x 170 lm - 3000K	3 x 170 lm - 3000K	5 x 170 lm - 3000K
Light distribution	Narrow beam 15° Beam 30° (on request)	Narrow beam 15° Beam 30° (on request)	Narrow beam 15° Beam 30° (on request)
Fitting	-	-	-
Light color	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
CRI	90	90	>90

* The absorption capacity per ft³ calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²

