

ILLUMINATED BOLLARD


The E-LB21 Illuminated Bollard with Symmetrical Optics provides general area illumination and is great for marking area boundaries. Optional accent lighting at ground level. Made of stainless steel with a polyester powder coat finish.



Fixture Dimensions
Ø4.5" x 35.4" h

TECHNICAL DATA

Wattage / Input	14.4W (120-277V)
Power Supply	Integral
Construction	Body: Stainless Steel Buried Base: Hot-dip Galvanized Steel Flange Plate: Stainless Steel LED Ground/Upper Illumination Component: Aluminum, sealed with Polyurethane Resin Designed for feed-through wiring
CCT	4000K
CRI	>80
Optics	Ground/Upper Illumination Component: Symmetrical Diffuse
Finishes	Silver Gray Polyester Powder Coated (DB 703), Custom RAL Upon Request
Fixture Dimensions	Ø4.5" x 35.4" h
Fixture Weight	23.15 lbs
LED Source	2 LED modules each with 8 high-performance LEDs (Ground/Upper Illumination Component)
Color Consistency	3-Step MacAdam
Operating Temp.	-13°F to +122°F
IP Rating	IP65
Impact Rating	IK10

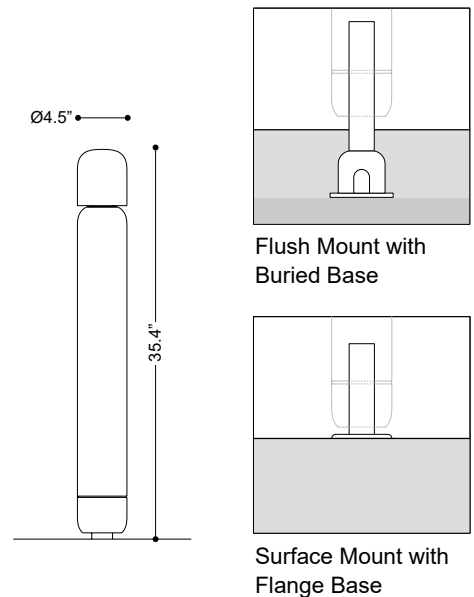

ORDERING INFORMATION

Example: E-LB21-3011210.

Model No.	
E-LB21-3011201	Illuminated - Flush Mount with Buried Base
E-LB21-3011205	Illuminated - Surface Mount with Flange Base
E-LB21-3011209	Non Illuminated - Flush Mount with Buried Base
E-LB21-3011210	Non Illuminated - Surface Mount with Flange Base

CCT
4000K

Finish
Silver Gray
Consult factory for Custom RAL


Job Name/Date:

Fixture Type Designation:

ILLUMINATED BOLLARD

PHOTOMETRIC DATA

Note all Photometry is 4000K

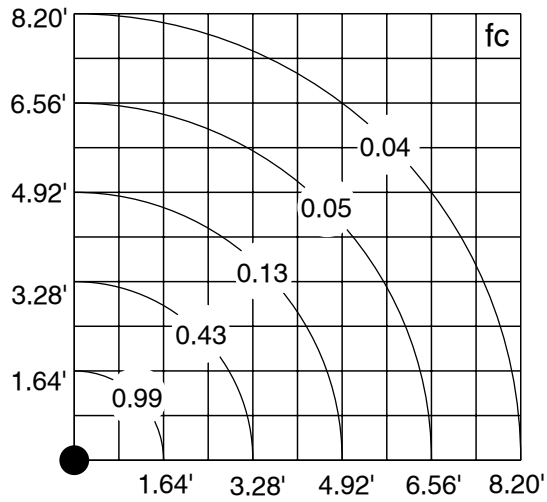

Job Name/Date:

Fixture Type Designation: