

EYES

INDOOR RECESSED DOWNLIGHTS
STARRY SKY, SHELVES, SHOWCASES AND FALSE CEILINGS

ROUND COVER




2700K 3000K 4000K 5000K blue

CONSTANT CURRENT

CONSTANT VOLTAGE

Ø0.98"

IDEAL FOR STARRY SKY



wide

diffuse



EYES 1.0

1W 350mA



EYES 1.6

1W 24VDC

Ø1.38"

IDEAL FOR SHELVES AND SHOWCASES



diffuse




EYES 2.0

2W 500mA

Ø1.34"

IDEAL FOR SHELVES AND SHOWCASES



narrow

medium

wide

elliptical



EYES 2.1

2W 500mA



EYES 2.7

2W 24VDC

▼

EYES 2.1

4000K, 2W, 20°, white

designplan™ 

79 Trenton Avenue
Frenchtown, NJ 08825


www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

EYES

INDOOR RECESSED DOWNLIGHTS
STARRY SKY, SHELVES, SHOWCASES AND FALSE CEILINGS

SQUARE COVER



2700K 3000K 4000K 5000K blue

CONSTANT CURRENT

CONSTANT VOLTAGE

0.98"x0.98"

IDEAL FOR STARRY SKY



wide

diffuse



EYES 1.2

1W 350mA



EYES 1.8

1W 24VDC

1.38"x1.38"

IDEAL FOR SHELVES AND SHOWCASES



diffuse



EYES 2.2

2W 500mA

1.38"x1.38"

IDEAL FOR SHELVES AND SHOWCASES



narrow

medium

wide

elliptical




EYES 2.3

2W 500mA



EYES 2.9


2W 24VDC

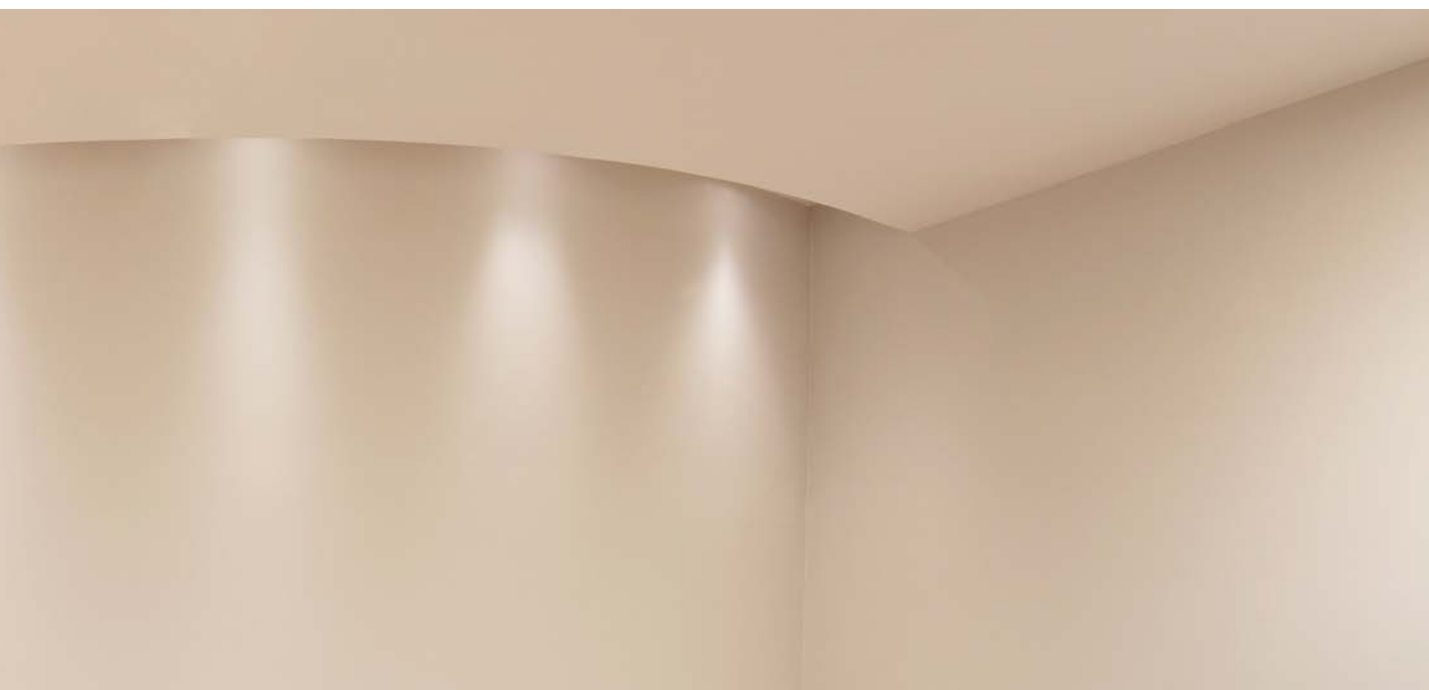


EYES 1



EYES 1.0



EYES 1.2




MODEL NO.	1W 350mA EY1011 ■ B White EY1011 ■ C Chrome EY1011 ■ D Gold EY1011 ■ S Satin EY1011 ■ N Black
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
OPTICS	F - 40° D - diffuse
LUMEN OUTPUT AT SOURCE	110 lm (3000K, 350mA)
DELIVERED LUMEN OUTPUT	54 lm (3000K, 350mA, 40°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum trim in brass
POWER SUPPLY UNIT	remote power supply required, not included
WIRING	series
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page

MODEL NO.	1W 350mA EY1211 ■ B White EY1211 ■ C Chrome EY1211 ■ D Gold EY1211 ■ S Satin EY1211 ■ N Black
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
OPTICS	F - 40° D - diffuse
LUMEN OUTPUT AT SOURCE	110 lm (3000K, 350mA)
DELIVERED LUMEN OUTPUT	54 lm (3000K, 350mA, 40°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum trim in brass
POWER SUPPLY UNIT	remote power supply required, not included
WIRING	series
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page



EYES 1.6



1W 24VDC

- EY1611 **B** White
- EY1611 **C** Chrome
- EY1611 **D** Gold
- EY1611 **S** Satin
- EY1611 **N** Black

■	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
■	F - 40° D - diffuse

110 lm (3000K)

54 lm (3000K, 40°)

1 power LED
1/4 ANSI BIN (white LED color)
50,000h L90 B10 (Ta 25°C)

body in anodized aluminum
trim in brass

remote power supply required, not included


parallel

recessed (ceiling)

none



EYES 1.8



1W 24VDC

- EY1811 **B** White
- EY1811 **C** Chrome
- EY1811 **D** Gold
- EY1811 **S** Satin
- EY1811 **N** Black

■	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
■	F - 40° D - diffuse

110 lm (3000K)

54 lm (3000K, 40°)

1 power LED
1/4 ANSI BIN (white LED color)
50,000h L90 B10 (Ta 25°C)

body in anodized aluminum
trim in brass

remote power supply required, not included

parallel


recessed (ceiling)

none


EYES 2



EYES 2.0




Ø 4.33" H 3.54" Ø 1.18"



10°x45° optics
(Eyes 2.1)



EYES 2.1



Ø 4.33" H 3.54" Ø 1.18"

LED TECH 0.22 lbs IP40
EPS


LED TECH 0.22 lbs IP40
EPS

MODEL NO.	2W 500mA F1235 D E B White F1235 D E C Chrome F1235 D E D Gold F1235 D E S Satin F1235 D E N Black
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	145 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	73 lm (3000K, 500mA)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum trim in brass lens in transparent polycarbonate
POWER SUPPLY UNIT	remote power supply required, not included
WIRING	series
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
NOTES	version with 2200K LED color available on request



MODEL NO.	2W 500mA F1235 E B White F1235 E C Chrome F1235 E D Gold F1235 E S Satin F1235 E N Black
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
OPTICS	S - 10° M - 20° L - 40° W - 10°x45°
LUMEN OUTPUT AT SOURCE	145 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	115 lm (3000K, 500mA, 20°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum trim in brass
POWER SUPPLY UNIT	remote power supply required, not included
WIRING	series
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
NOTES	24VDC version: Eyes 2.7 version with 2200K LED color available on request



EYES 2.2

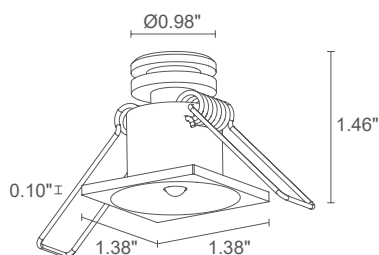

EYES 2.3

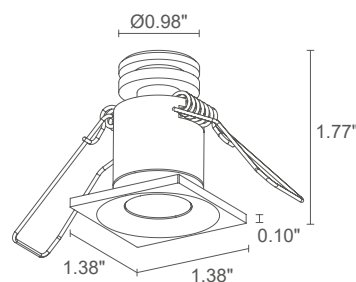

10°x45° optics
(Eyes 2.3)

- 2W 500mA
FQ1235 ■ **D E B** White
FQ1235 ■ **D E C** Chrome
FQ1235 ■ **D E D** Gold
FQ1235 ■ **D E S** Satin
FQ1235 ■ **D E N** Black

- 2W 500mA
FQ1235 ■ **E B** White
FQ1235 ■ **E C** Chrome
FQ1235 ■ **E D** Gold
FQ1235 ■ **E S** Satin
FQ1235 ■ **E N** Black

- **F** - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

- **F** - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

diffuse

- **S** - 10°
M - 20°
L - 40°
W - 10°x45°

145 lm (3000K, 500mA)

145 lm (3000K, 500mA)

73 lm (3000K, 500mA)

115 lm (3000K, 500mA, 20°)

1 power LED
 1/4 ANSI BIN (white LED color)
 50,000h L90 B10 (Ta 25°C)

1 power LED
 1/4 ANSI BIN (white LED color)
 50,000h L90 B10 (Ta 25°C)

body in anodized aluminum
 trim in brass
 lens in transparent polycarbonate

body in anodized aluminum
 trim in brass

remote power supply required, not included

remote power supply required, not included

series

series

recessed (ceiling)

recessed (ceiling)

see accessories page

see accessories page

version with 2200K LED color available on request

24VDC version: Eyes 2.9
 version with 2200K LED color available on request




EYES 2




EYES 2.7






EYES 2.9



10°x45° optics
(Eyes 2.7)



10°x45° optics
(Eyes 2.9)

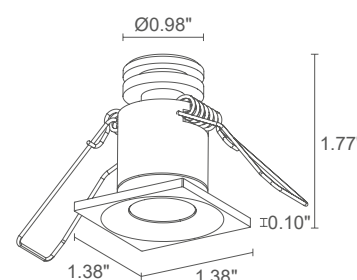

MODEL NO.	2W 24VDC F2700 ■ B White F2700 ■ C Chrome F2700 ■ D Gold F2700 ■ S Satin F2700 ■ N Black
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
OPTICS	S - 10° M - 20° L - 40° W - 10°x45°
LUMEN OUTPUT AT SOURCE	145 lm (3000K)
DELIVERED LUMEN OUTPUT	115 lm (3000K, 20°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum trim in brass
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
NOTES	500mA version: Eyes 2.1 version with 2200K LED color available on request

MODEL NO.	2W 24VDC F2900 ■ B White F2900 ■ C Chrome F2900 ■ D Gold F2900 ■ S Satin F2900 ■ N Black
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
OPTICS	S - 10° M - 20° L - 40° W - 10°x45°
LUMEN OUTPUT AT SOURCE	145 lm (3000K)
DELIVERED LUMEN OUTPUT	115 lm (3000K, 20°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum trim in brass
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
NOTES	500mA version: Eyes 2.3 version with 2200K LED color available on request

< EYES 2.1
4000K, 2W, 20°, white

Project and light planning by /
Studio Casolaro Giuseppe e Ottavio
Offices, Foggia, Italy

EYES

ACCESSORIES

ACCESSORIES FOR INSTALLATION



WC0201
Outer casing for solid walls
(Eyes 2.0 / 2.1 / 2.2 / 2.3 / 2.7 / 2.9)



WC0202
Outer casing for solid walls
(Eyes 2.0 / 2.1 / 2.2 / 2.3 / 2.7 / 2.9)

POWER CABLES

PVC cable
FROR 2x0.35 Ø3.5 mm
your choice of length

WF0110
(Eyes 1.0 / 1.2 / 2.0 / 2.1 / 2.2 / 2.3)

order together
with the lighting fixture