


**Technical features**



101101P

# FLASH MEDIUM

Round floodlight for outdoor installation on a facade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120VAC 50-60Hz, with 5 CREE XP-G3 high-power LED. IP65 rating.

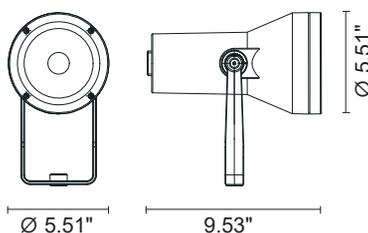

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	10°	674	84.3
high-power led	30°	541	67.6
high-power led	45°	704	88.0
<b>4000°K neutral-white</b>			
high-power led	10°		
high-power led	30°		
high-power led	45°		

**Finish color options:**

-  Textured Gray  
RAL 9006
-  Anthracite Gray  
RAL 7016
-  Matte Black  
(on request)

**Technical data**

Wattage	8W
IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 5 CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	5.7 lbs

AC-026P Anti-glare visor for Flash medium



Graduated stainless steel insert

