

**Technical features**

IP65 IK09

**Technical data**


Wattage	22W
IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 15 CREE "XP-G2" LED
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	11.0 lbs







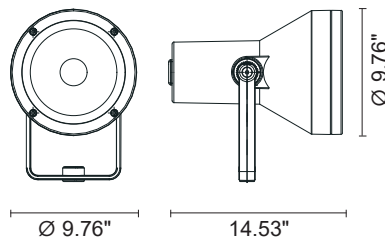

101105P

# FLASH MEGA

Round floodlight for outdoor installation on a facade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120VAC 50-60Hz, with 15 CREE XP-G2 high-power LED. IP65 rating.



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	 10°	2,120	96.4
high-power led	 30°	1,981	90.0
high-power led	 45°	1,655	75.2
<b>4000°K neutral-white</b>			
high-power led	 10°		
high-power led	 30°		
high-power led	 45°		

**Finish color options:**

-  Textured Gray RAL 9006
-  Anthracite Gray RAL 7016
-  Matte Black (on request)

