

**Technical features**

IP65 IK09



805003P-805007P


# FLASH POLE MAXI

Round pole-mounted floodlight for outdoor installation on a pole diam. 2.36" or 2.99" (pole by others). Phospho-chromatized and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Clamp for pole diam 2.36" or 2.99" included. Built-in LED driver 120VAC 50-60Hz, with 8 CREE XP-G3 high-power LED. IP65 rating.


**Technical data**

IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	9.84 ft. neoprene power cable included

805003P

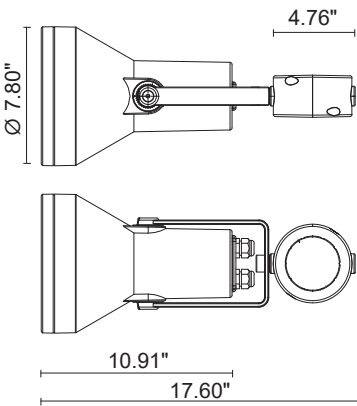


805007P

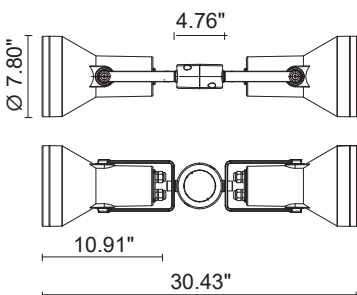





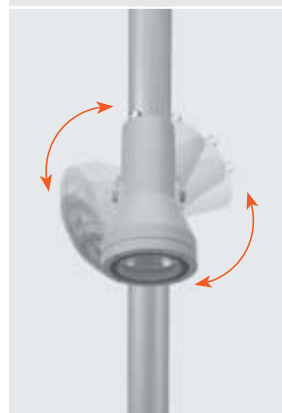

AC-027P Anti-glare visor for Flash Maxi



Graduated stainless steel insert



805003P **SINGLE FLASH POLE MAXI** - 12W 120VAC 50-60HZ ELECTRONIC

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	 10°	1,152	96.00
high-power led	 30°	1,095	91.25
high-power led	 45°	1,040	86.67
<b>4000°K neutral-white</b>			
high-power led	 10°	1,200	100.00
high-power led	 30°	1,140	95.00
high-power led	 45°	1,083	90.25

**Colors options**

-  Textured Gray  
RAL 9006
-  Anthracite Gray  
RAL 7016
-  Matte Black  
(on request)







**Technical data**

Wattage	12W
Light source	NR. 8 CREE "XP-G3" LED
Gross weight	8.8 lbs



POLE BY OTHERS

805007P **DOUBLE FLASH POLE MAXI** - 2 X 12W 120VAC 50-60HZ ELECTRONIC

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	 10°	2 x 1,152	96.00
high-power led	 30°	2 x 1,095	91.25
high-power led	 45°	2 x 1,040	86.67
<b>4000°K neutral-white</b>			
high-power led	 10°	2 x 1,200	100.00
high-power led	 30°	2 x 1,140	95.00
high-power led	 45°	2 x 1,083	90.25

**Colors options**

-  Textured Gray  
RAL 9006
-  Anthracite Gray  
RAL 7016
-  Matte Black  
(on request)

**Technical data**

Wattage	2 x 12W
Light source	NR. 2 x 8 CREE "XP-G3" LED
Gross weight	16.5 lbs



POLE BY OTHERS