



The Geko series are outdoor wall-mounted fixtures with a simplified design perfect for general or scenographic lighting. Geko 5.0 is a single-beam version with diffuse optics that comes in 3 color temperatures and 4 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	10W, 16W (120-277VAC)
<b>Power Supply</b>	Integral (0-10V Dimming)
<b>Construction</b>	Body: Die-cast Aluminum Alloy EN AB 47100 Lens: Tempered, Serigraphed, Sandblasted Glass Cable: 1.0' with connection box
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	531 lm (3000K, 10W) 831 lm (3000K, 16W)
<b>Efficacy</b>	53.1 lm/W (3000K, 10W) 51.9 lm/W (3000K, 16W)
<b>Optics</b>	Diffuse
<b>Finishes</b>	4 Standard, Custom RAL (see below)
<b>Fixture Dimensions</b>	6.69" l x 3.94" w x 3.94" h
<b>Fixture Weight</b>	3.97 lbs
<b>LED Source</b>	Power LED Matrix
<b>Lumen Maintenance</b>	L80 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP65
<b>Impact Rating</b>	IK07

Fixture Dimensions

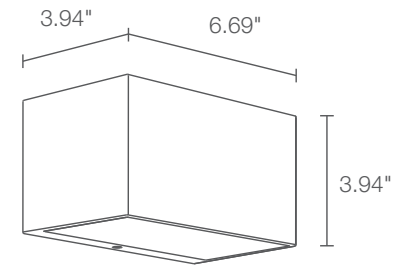

Diffuse optics

## ORDERING INFORMATION


Example: GK5010FDH. Accessories ordered separately.

<b>GK501</b>			<b>D</b>	
<b>Model No.</b>	<b>Wattage</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>
<b>GK501</b>	<b>0</b> - 10W <b>1</b> - 16W	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K	<b>D</b> - Diffuse	<b>E</b> - White <b>F</b> - Gray <b>H</b> - Anthracite <b>T</b> - Cor-ten <b>C</b> - Custom RAL (Consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES - Installation

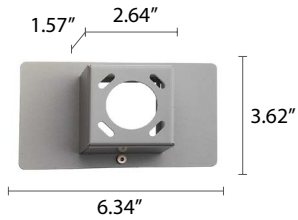

### WD0300\_\_

Spacer

For Spacer include one of the below finishes:

**E** - White

**F** - Gray

**H** - Anthracite


**T** - Corten

**C** - Custom RAL (Consult factory)

## PHOTOMETRIC DATA

Note all Photometry is 3000K

D - Diffuse

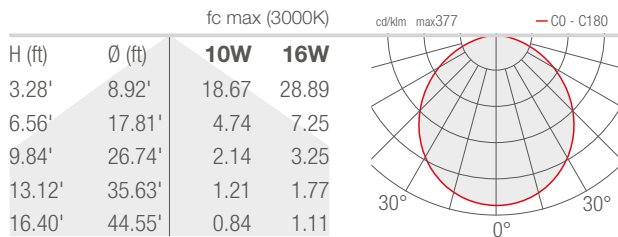

Job Name/Date:

Fixture Type Designation: