

GEKO 5.1

3000K, 10W, 30°, grey

Light planning by / Cristian Turra

Photo by / Alessio Tamborini

Private residence, Brescia, Italy

designplan 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



GEKO

OUTDOOR WALL MOUNTED
ARCHITECTURAL LIGHTING FOR WALLS AND FACADES



SINGLE BEAM



DOUBLE BEAM

2700K 3000K 4000K



diffuse



GEKO 5.0
10W/16W 120-277VAC



GEKO 6.0
16W/28W 120-277VAC

2700K 3000K 4000K 5000K



ultra-narrow



narrow



medium



wide



elliptical



asymmetrical




GEKO 5.1
10W 120-277VAC




GEKO 6.1
20W 120-277VAC



GEKO 5




GEKO 5.0

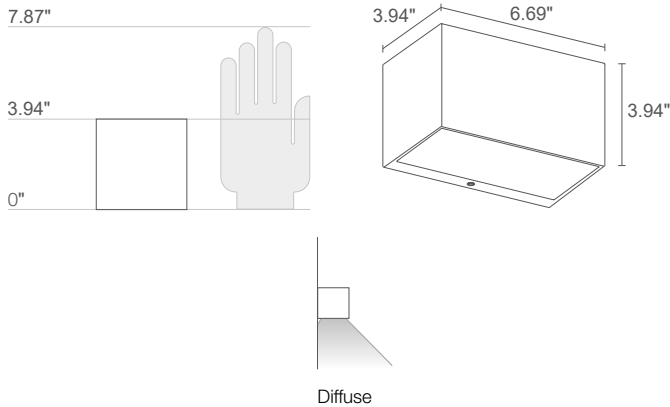

LED TECH 3.97 lbs IP65 IK07



GEKO 5.1

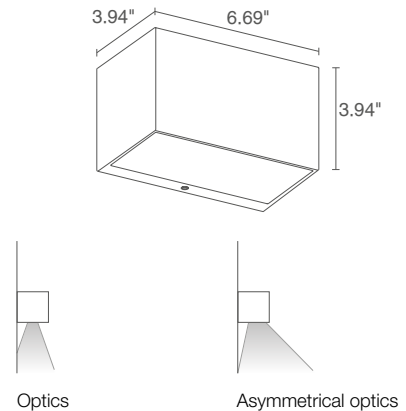

LED TECH 3.97 lbs IP65 IK07
PID

POWER / POWER SUPPLY MODEL NO.

10W 120-277VAC
GK5010 ■ **D E** White
GK5010 ■ **D F** Grey
GK5010 ■ **D H** Anthracite
GK5010 ■ **D T** Cor-ten

16W 120-277VAC
GK5011 ■ **D E** White
GK5011 ■ **D F** Grey
GK5011 ■ **D H** Anthracite
GK5011 ■ **D T** Cor-ten

LED COLOR

F - 2700K
5 - 3000K
9 - 4000K

OPTICS

diffuse

LUMEN OUTPUT AT SOURCE

713 lm (3000K, 10W)
 1120 lm (3000K, 16W)

DELIVERED LUMEN OUTPUT

531 lm (3000K, 10W)
 831 lm (3000K, 16W)

NO. AND TYPE OF LED

power LED matrix
 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)

MATERIAL

body in die-cast aluminum
 lens in serigraphed, sandblasted,
 tempered extra-clear glass

POWER SUPPLY UNIT

integral

POWER CABLES

connection box with 0.98' cable

MOUNTING

surface mounted (wall)

10W 120-277VAC

GK5110 ■ **E** White
GK5110 ■ **F** Grey
GK5110 ■ **H** Anthracite
GK5110 ■ **T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K

T - 7°
S - 10°
F - 30°
K - 70°
W - 10°x45°
A - asymmetrical

727 lm (3000K)

535 lm (3000K, 30°)

5 power LEDs
 1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)

body in die-cast aluminum
 lens in serigraphed, tempered, transparent
 extra-clear glass




integral

connection box with .98' cable



surface mounted (wall)





GEKO 6



GEKO 6.0



GEKO 6.1



POWER / POWER SUPPLY MODEL NO.

16W 120-277VAC
GK6010 ■ **D E** White
GK6010 ■ **D F** Grey
GK6010 ■ **D H** Anthracite
GK6010 ■ **D T** Cor-ten

28W 120-277VAC
GK6011 ■ **D E** White
GK6011 ■ **D F** Grey
GK6011 ■ **D H** Anthracite
GK6011 ■ **D T** Cor-ten

■ LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
--------------------	--

■ OPTICS	diffuse
-----------------	---------

LUMEN OUTPUT AT SOURCE	713 lm (3000K, 16W) per beam 1120 lm (3000K, 28W) per beam
DELIVERED LUMEN OUTPUT	531 lm (3000K, 16W) per beam 831 lm (3000K, 28W) per beam
NO. AND TYPE OF LED	power LED matrix 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in serigraphed, sandblasted, tempered extra-clear glass
POWER SUPPLY UNIT	integral
POWER CABLES	connection box with 0.98' cable
MOUNTING	surface mounted (wall)

20W 120-277VAC
GK6110 ■ **E** White
GK6110 ■ **F** Grey
GK6110 ■ **H** Anthracite
GK6110 ■ **T** Cor-ten

■	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K
---	--


■	T - 7° S - 10° F - 30° K - 70° W - 10°x45° A - asymmetrical
---	--

	727 lm (3000K) per beam
	535 lm (3000K, 30°) per beam
	10 power LEDs 1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)
	body in die-cast aluminum lens in serigraphed, tempered, transparent extra-clear glass
	integral
	connection box with 0.98' cable
	surface mounted (wall)

GEKO

ACCESSORIES

ACCESSORIES FOR INSTALLATION



WD0300E - White
WD0300F - Grey
WD0300H - Anthracite
WD0300T - Cor-ten
Spacer
RAL finish available on request

✓
GEKO 5.1
with asymmetrical optics



✓
GEKO 5.1
with 70° optics



GEKO 6.1
2700K, 20W, 10°, white
Light planning by / LuceDomotica
Hilton Garden Inn, Bucharest, Romania




GEKO

OUTDOOR WALL MOUNTED


GEKO 5.0

D - Diffuse

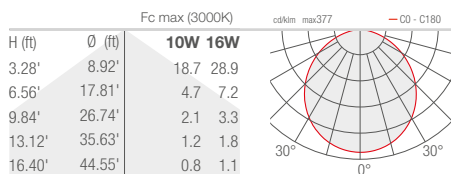


GEKO 5.1


T - 7°

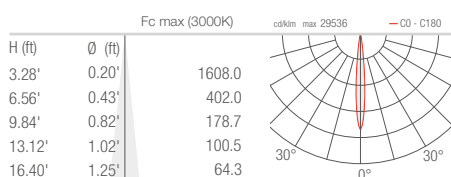


S - 10°

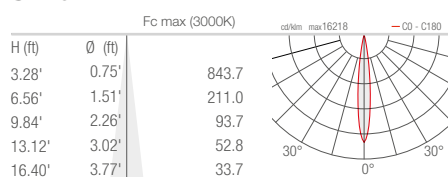


F - 30°

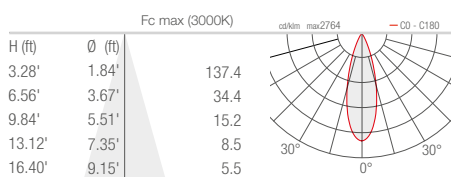

K - 70°

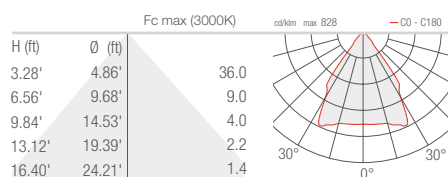

W - 10°x45°

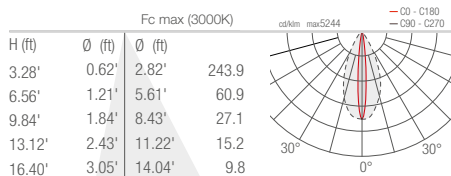

A - Asymmetrical

