


The Ginko series IP66, IP69K projectors are small and versatile. Available in a variety of finishes, optics (some models have integral adjustable optics), and 80 or 90 CRI.

TECHNICAL DATA

Wattage / Input	3.5W (only 5° optics), 5W, 7W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anti-corrosive Aluminum Alloy or 316L SS Bracket: 316L SS Lens: Tempered extra-clear glass Cable Length: 4.92' standard
CCT	2700K, 3000K, 4000K <i>(3500K on request, not available on 5° optic)</i>
CRI	2700K, 3000K, 4000K: CRI >80, 90 <i>Note: 3.5W 4000K is CRI 80 only</i>
Delivered Lumens	See Delivered Lumens Chart
Efficacy	57-70 lm/W (5W), 53-66 lm/W (7W)
Optics	12 Standard (see below)
Finishes	7 Standard, Custom RAL (see below)
Fixture Dimensions	Ø2.13" x 2.28" x 2.17" h (max 4.21" h fully extended), 0.98" wide bracket
Fixture Weight	0.84 lbs
LED Source	1 Power LED (3.5W), 1 High Intensity Power LED
Lumen Maintenance	L90,B10 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN (3.5W), 3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP66, IP69K
Impact Rating	IK07



Fixture Dimensions

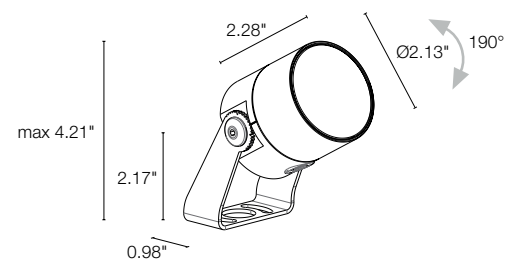

Delivered Lumens (3000K, 34°)	5W	7W
CRI 80	352 lm	463 lm
CRI 90	284 lm	374 lm

ORDERING INFORMATION

Example: GN200115SE or GN200115SE-2. Accessories / Power Supplies ordered separately.

Model #	Wattage	CRI	CCT	Optics	Finish	Cable Length
GN200	0 - 3.5W	0 - CRI 80	F - 2700K	U - 5° (3.5W only) K - 68°	I - Stainless Steel	4.92' standard
	1 - 5W	1 - CRI 90	5 - 3000K	V - 8° W - 13° v x 52° h	E - White	1 - 16.40'
	2 - 7W		9 - 4000K*	T - 11° X - 54° v x 15° h	N - Black Anodized	2 - 32.81'
			*3.5W 4000K for CRI 80 only	S - 17°	G - Gray	3 - 49.21'
				P - 21° sharp	H - Anthracite	4 - 65.62'
				M - 34°	T - Corten	
				L - 45°	5 - Jasper Green	
				J - 47°	C - Custom RAL (consult factory for "C")	
				Q - 61° sharp		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

3.5W - 24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-2
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2	1-5
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-13
PPLT00599	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-21
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-22
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	3-22

SUGGESTED POWER SUPPLIES

5W - 24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2	1-4
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-9
PPLT00599	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-15
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-16
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-16

SUGGESTED POWER SUPPLIES

7W - 24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2	1-2
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-6
PPLT00599	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-10
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-11
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-11

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES Installation



WP0100
Ground Spike
(Length 10.12")



WP1006__ (Length 19.69")
WP1007__ (Length 31.50")
Ground Spike with Bracket
Include one of the below finishes:
I - Stainless Steel
E - White
N - Black anodized
F - Gray
H - Anthracite
T - Cor-ten
5 - Jasper Green
C - Custom RAL




WP1004
Fastener Strap
(Length 16.4')

Additional Cable Lengths
Consult factory



WF3301
Cable Protection Sheath
(Length 6.0")

Anti-Glare



WH0201
Honeycomb Louvre
Not available for Sharp Optics.



WB8012__
Standard Snout



WB8022__
Asymmetric Snout

For Snouts include one of the below finishes:
E - White
N - Black anodized
F - Gray
H - Anthracite
T - Cor-ten
5 - Jasper Green
C - Custom RAL


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K, CRI 80


U - 5° CRI 80

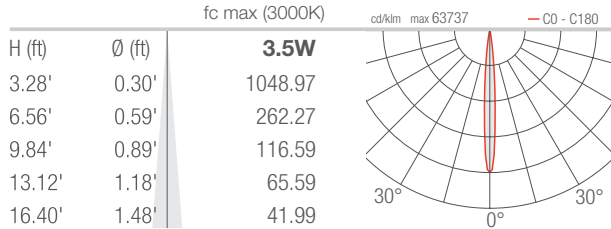


V - 8° CRI 80

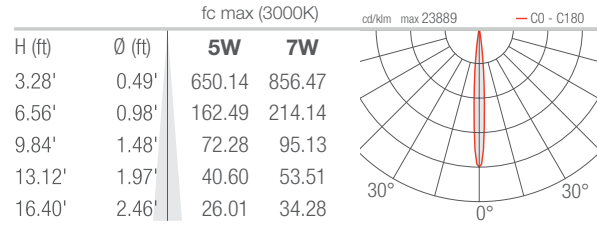


T - 11° CRI 80

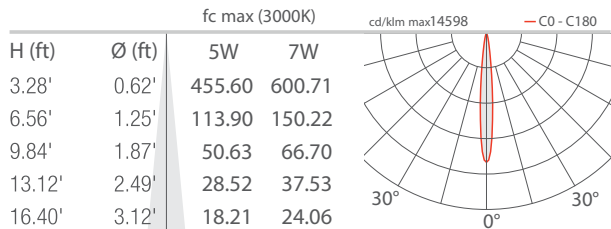


S - 17° CRI 80

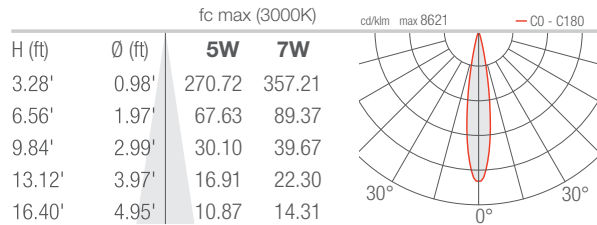


P - 21° sharp CRI 80

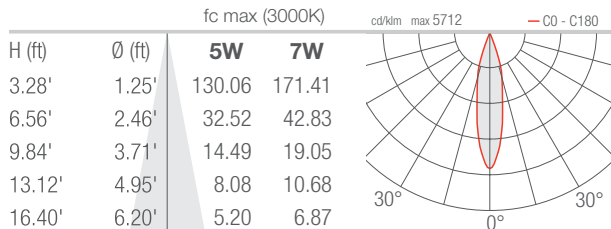


M - 34° CRI 80

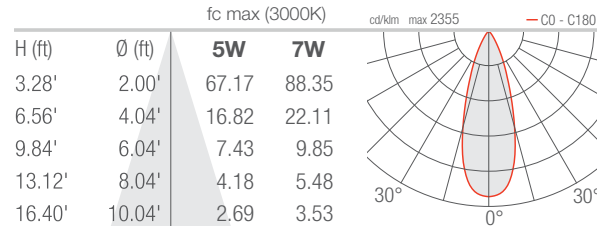

L - 45° CRI 80

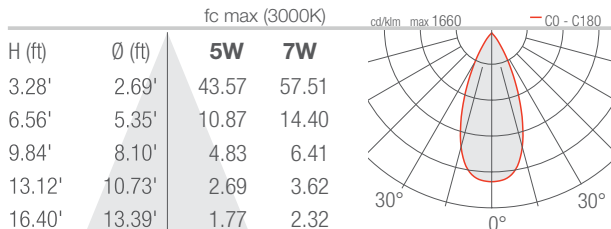

J - 47° CRI 80

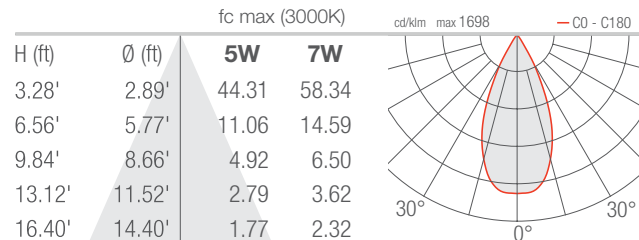


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K, CRI 80



Q - 61° sharp CRI 80

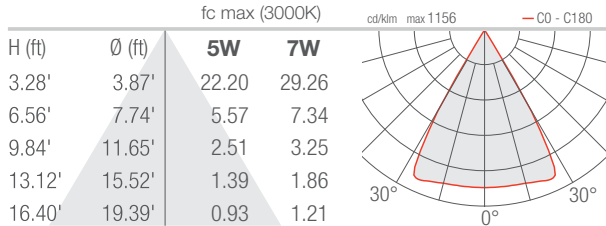



K - 68° CRI 80

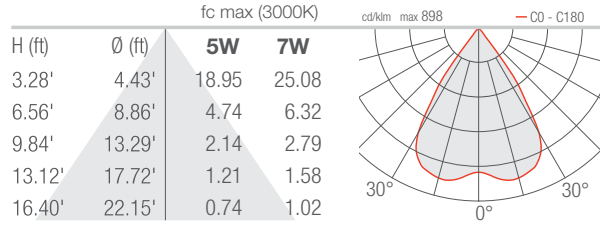

W - 13°x52° CRI 80

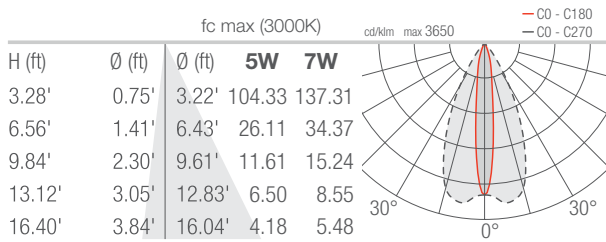

X - 54°x15° CRI 80

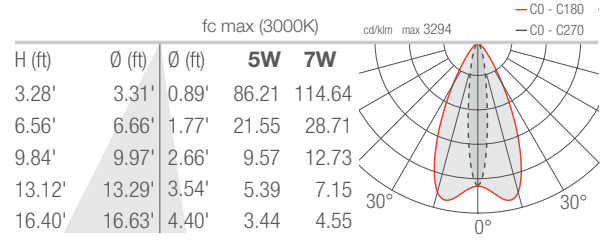

Job Name/Date:

Fixture Type Designation: