

Technical features


IP65	IK08
------	------

402404P

HORIZON MEDIUM 02


Designed by
PAOLO VILLA

Applique of rectangular shape for outdoor installation on a facade/wall, with double light emission (up/down). Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered frosted safety glass, molded silicone gasket and stainless steel screws. Integral 120VAC 50-60Hz, with 42 mid-power CREE XH-G LED. IP65 rating.

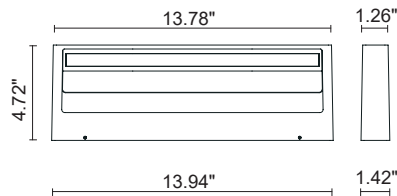

Technical data

Wattage	23W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body and fixing arms
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 42 x CREE "XH-G" LED
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz Integral
Gasket	Silicone rubber
Gross weight	6.6 lbs

light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
mid-power led	 bi-directional diffused	1204	52.35

* Other light colors available on request: Neutral-white

Finish color options:

 Textured Gray RAL 9006	 Anthracite Gray RAL 7016	 Matte Black (on request)
---	--	--

