



Technical features





Technical data

Material	High performances Polyurethane, UV resistant, saltwater resistant
	Not yellowish after years
	Dot-free and homogeneous light emission
Light source	SMD3014 Lumileds LED
Transformer	24VDC remote driver needed
	Supplied with Male/Female connectors for in-line installation

401801P-401802P-401803P

HYDROFLEX MINI

39.37" / 118.11" / 196.85" length, 0.39" x 0.39" section, opal encapsulated flexible LED strip for linear lighting (straight or bended) outdoor and indoor wall-recessed installation; surface mounted version through installation accessories to be ordered separately. LED circuit completely encapsulated with UV and high-temperatures resistant Polyurethane sheath, with white (outside) and milky finish (over light emission), dot free and homogeneous light emission surface. Double power cable with male/female connectors included, suitable for in-line installation. Available in increments of 1.97". Remote driver 24VDC needed. With low-power SMD3014 Lumileds LED. IP68 rating.

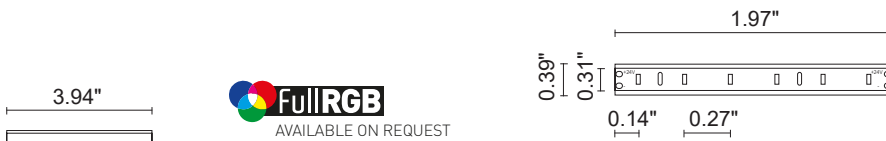

401801P

HYDROFLEX MINI 1000 (3.28)

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
low power led	<input type="checkbox"/> diffused	750	75.00

Finish color options:

Milky



Technical data

Wattage	10W
IP Rating	IP68

11.81"

401802P	HYDROFLEX MINI 3000		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)

3000°K warm-white

low power led	 diffused	2,500	75.00
---------------	--	-------	-------

Finish color options:
 Milky
**Technical data**


Wattage 30W

IP Rating IP68

19.69"

401803P	HYDROFLEX MINI 5000		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)

3000°K warm-white

low power led	 diffused	3,750	75.00
---------------	--	-------	-------

Finish color options:
 Milky
**Technical data**

Wattage 50W

IP Rating IP68

ACO28P MOUNTING CLIP FOR HYDROFLEX MINI


Mounting clip for Hydroflex Mini, realized in stainless steel, clip to be applied every 15.75", to secure with screws. Ideal for bended installation on a wall or ceiling.

**ACO29P ALUMINUM LINEAR PROFILE FOR HYDROFLEX MINI**

39.37" Linear profile for Hydroflex Mini, realized in anodized aluminum, supplied with nr. 2 clips to be applied every 15.75", to secure with screws. Ideal for straight installation on a wall or ceiling.

**ACO30P END CAP FOR HYDROFLEX MINI**

End cap for Hydroflex Mini, realized in Polyurethane, to be applied at the end of the line, after Hydroflex cut.

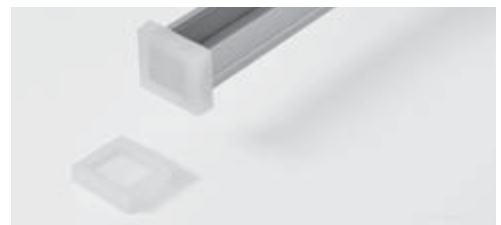**ACO54P LEADER CABLE FOR HYDROFLEX RANGE**

Initial cable to connect the driver to first luminaire of an in-line installation of multiple luminaires, all connected to one driver. Kit contains two leader cables, one with male connector and one with female connector, to allow start the installation from both sides.

