


Technical features



Technical data


Wattage	24W
IP Rating	IP67
IK Rating	IK10
Material	High corrosion resistance die-cast copper-free aluminum body
Trim	Stainless steel AISI 304
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 16 x 1.5W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Static weight resistance	Max 11,000 lbs
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double M20
Adjustable	+/- 15 degrees
Power cable	3.28' neoprene power cable included
Gross weight	12.6 lbs
Included	Polypropilene recessing box included

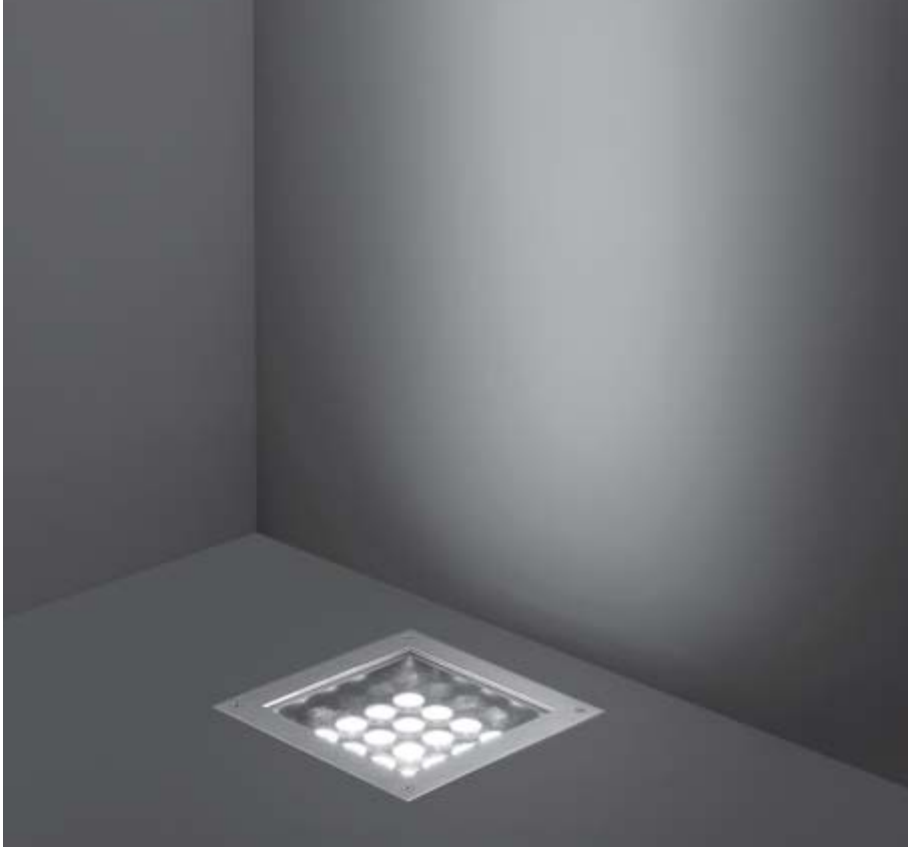







202009P

HYDROQUADRO MAXI

Square ground-recessed luminaire for outdoor installation, Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body and stainless steel AISI 304 frame, tempered safety glass, molded silicone gasket. Built-in LED driver 120VAC 50-60Hz, with 16 CREE XP-G3 LED. IP67 rating.



HOLE FOR RECESSING 10.12" x 10.12"

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	 10°	2,304	96.00
high-power led	 30°	2,189	91.21
high-power led	 45°	2,080	86.67
4000°K neutral-white			
high-power led	 10°	2,400	100.00
high-power led	 30°	2,280	95.00
high-power led	 45°	2,166	90.25

Finish color options:

 Stainless Steel

