

I-Lantern (Bollard)


I-Lantern is an IP65-rated luminaire that can be used as a bollard, a garden lamp, or wall-mounted. The i-Lantern bollard comes in 3 heights, diffused optics and 4 standard finishes and is perfect for driveways in private and public areas. Dark Sky compliant for output below 80°.



TECHNICAL DATA

LED Wattage / Total	10W LED, 12.5W total
Power Supply	Integral 120-277VAC - 0-10V Dimming
Construction	Body: Die-Cast and Extruded Aluminum Lens: Opal Polycarbonate
CCT	3000K
BUG Rating	B0-U0-G0
CRI	>90
Delivered Lumens	600 lm (3000K) Dark Sky compliant, output below 80°
Efficacy	48 lm/W (3000K)
Optics	Diffused
Finishes	4 Standard, See Below
Fixture Dimensions	5.91" x 5.91" x 13.39" / 23.74" / 35.55" h
Lumen Maintenance	L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions

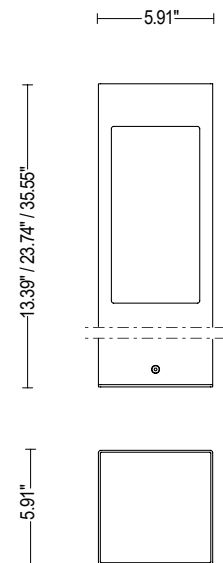

ORDERING INFORMATION

Example: LN035DHBBZV.US. Accessories ordered separately.

LN70		DHBBZ		US
Model No.	Height	DHBBZ	Finish	US
LN70	035 - 13.78" 060 - 23.62" 090 - 35.43"	DHBBZ	L - Graphite V - Oxide U - White G - Black H - Gray	US

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation





LN00ALN
Root Mounting Plate Assembly
For use when mounting in soil



LN00ALN.01P
Anchor Bolt Assembly
For use with concrete footing

PHOTOMETRIC DATA

Note: All photometric data is 3000K

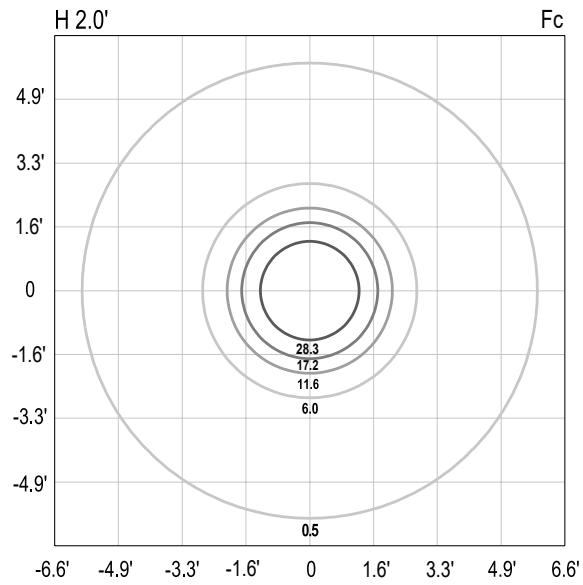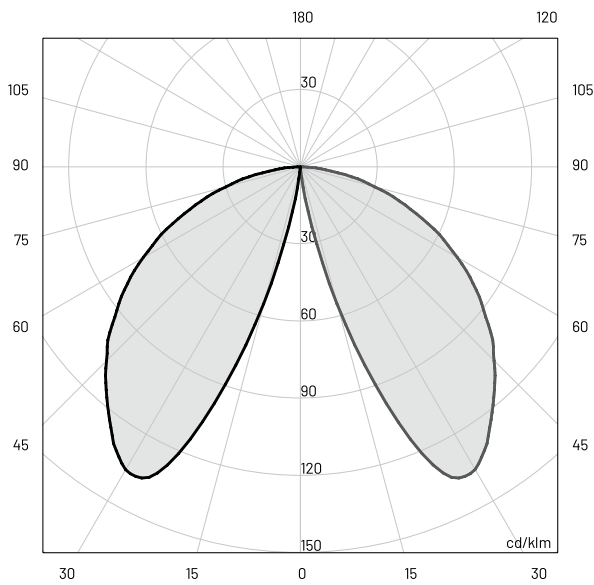

Job Name/Date:

Fixture Type Designation: