

# I-Lantern (Bollard)


I-Lantern is an IP65-rated luminaire that can be used as a bollard, a garden lamp, or wall-mounted. The i-Lantern bollard comes in 3 heights, diffused optics and 5 standard finishes and is perfect for driveways in private and public areas. Dark Sky compliant for output below 80°.



## TECHNICAL DATA

<b>Wattage</b>	12.5W
<b>Power Supply</b>	Integral 120-277VAC - 0-10V Dimming
<b>Construction</b>	Body: Die-Cast and Extruded Aluminum Lens: Opal Polycarbonate
<b>CCT</b>	2700K, 3000K
<b>BUG Rating</b>	B0-U0-G0
<b>CRI</b>	>90
<b>Delivered Lumens</b>	600 lm (3000K) Dark Sky compliant, output below 80°
<b>Efficacy</b>	48 lm/W (3000K)
<b>Optics</b>	Diffuse
<b>Finishes</b>	4 Standard, See Below
<b>Fixture Dimensions</b>	5.91" x 5.91" x 13.39" / 23.74" / 35.55" h
<b>Lumen Maintenance</b>	L80, B15 >60,000hrs (Ta 40°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK08

Fixture Dimensions

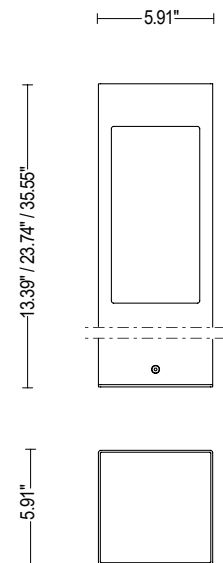

## ORDERING INFORMATION

Example: LN035DHBBZV.US. Accessories ordered separately.

LN70		D		BBZ		US
<b>Model No.</b>	<b>Height</b>	<b>Optics</b>	<b>CCT</b>	<b>BBZ</b>	<b>Finish</b>	<b>US</b>
LN70	035 - 13.78" 060 - 23.62" 090 - 35.43"	D - Diffuse	Y - 2700K H - 3000K	BBZ	L - Graphite V - Oxide U - White G - Black H - Gray	US

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES - Installation





**LN00ALN**  
Root Mounting Plate Assembly  
*For use when mounting in soil*



**LN00ALN.01P**  
Anchor Bolt Assembly  
*For use with concrete footing*

## PHOTOMETRIC DATA

*Note: All photometric data is 3000K*

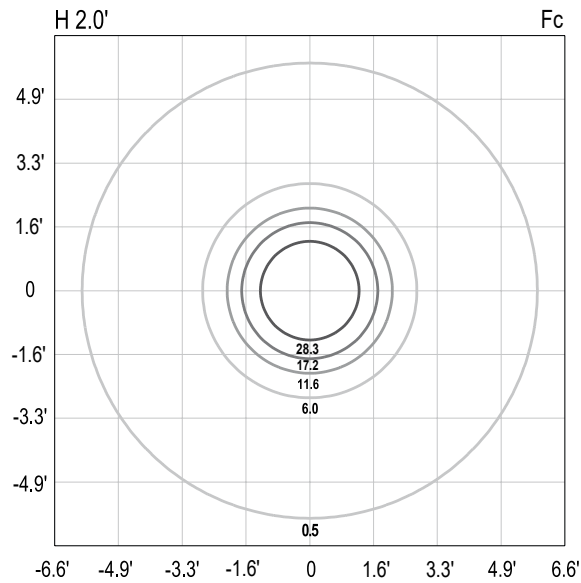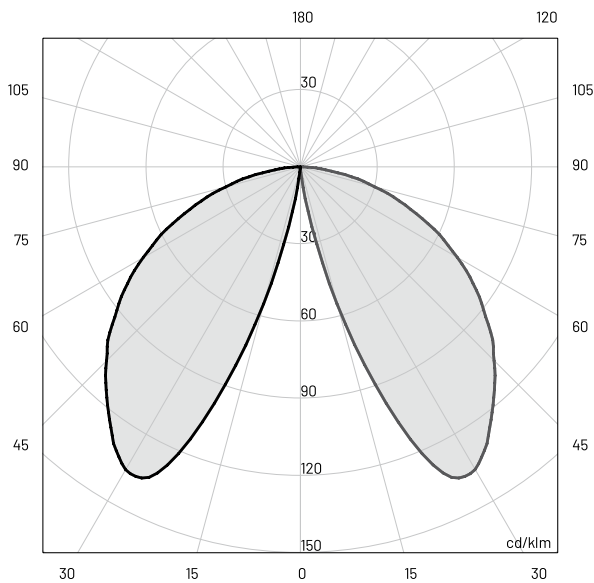

Job Name/Date:

Fixture Type Designation: