

I-Lantern (Bollard)

designplan®

datasheet

I-Lantern is an IP65-rated luminaire that can be used as a bollard, a garden lamp, or wall-mounted. The I-Lantern bollard comes in 3 heights, diffused optics and 5 standard finishes and is perfect for driveways in private and public areas. Dark Sky compliant.





TECHNICAL DATA

Wattage	12.5W
Power Supply	Integral 120-277VAC - 0-10V Dimming
Construction	Body: Die-Cast and Extruded Aluminum Lens: Opal Polycarbonate
CCT	2700K, 3000K
BUG Rating	B0-U0-G0
CRI	>90
Delivered Lumens	600 lm (3000K) Dark Sky compliant
Efficacy	48 lm/W (3000K)
Optics	Diffuse
Finishes	4 Standard, See Below
Fixture Dimensions	5.91" x 5.91" x 13.39" / 23.74" / 35.55" h
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions

5.91"



ORDERING INFORMATION

Example: LN035DHBBZV.US. Accessories ordered separately.

LN70		D		BBZ		US
Model No.	Height	Optics	CCT		Finish	
LN70	035 - 13.78" 060 - 23.62" 090 - 35.43"	D - Diffuse	Y - 2700K H - 3000K	BBZ	L - Graphite V - Oxide U - White G - Black H - Gray	US

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation

**LN00ALN**



Root Mounting Plate Assembly
For use when mounting in soil

**LN00ALN.01P**

Anchor Bolt Assembly
For use with concrete footing

PHOTOMETRIC DATA

Note: All photometric data is 3000K

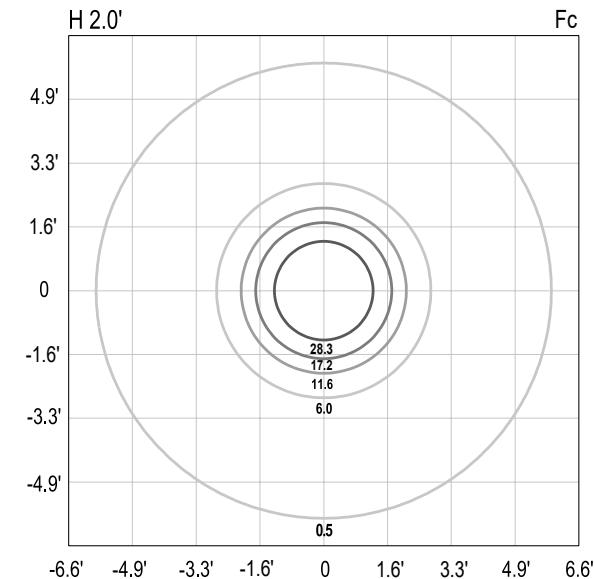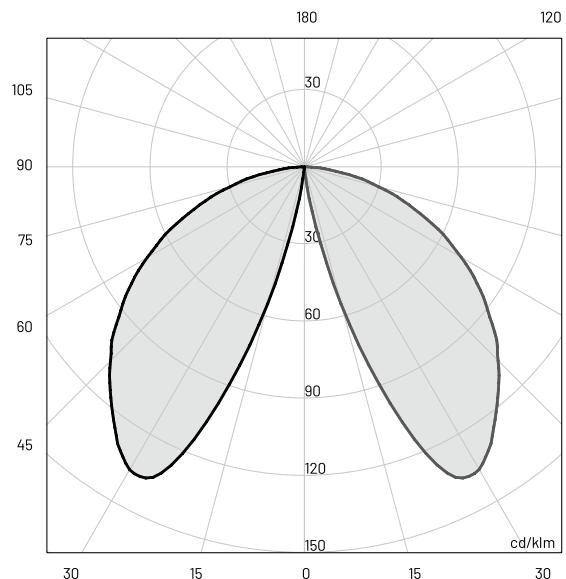

Job Name/Date:

Fixture Type Designation: