

I-Lantern (Garden Lamp)


I-Lantern is an IP65-rated luminaire that can be used as a bollard, a garden lamp or wall-mounted. The i-Lantern garden lamp comes in 2 sizes and is suitable for outdoor installations in parks and gardens. The portable i-Lantern is fitted with a red leather handle, which allows for moving and positioning the device in its desired location. Available in a rechargeable version with 3 hours of power.

TECHNICAL DATA

LED Wattage / Total	10W LED, 12.5W total (standard version) 4W LED, 4W total (rechargeable version)
Power Supply	Integral 120-277VAC - 0-10V Dimming
Construction	Body: Die-Cast and Extruded Aluminum Lens: Opal Polycarbonate Handle: Red Leather with Chromed Elements
CCT	3000K
BUG Rating	B0-U1-G0
CRI	>90
Delivered Lumens	700 lm (3000K) 220 lm (rechargeable version)
Efficacy	56 lm/W (3000K) 55 lm/W (rechargeable version)
Optics	Diffuse
Finishes	4 Standard, See Below
Fixture Dimensions	5.91" x 5.91" x 11.9" OR 20.9" h 3.0" handle
Lumen Maintenance	L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08



Fixture Dimensions

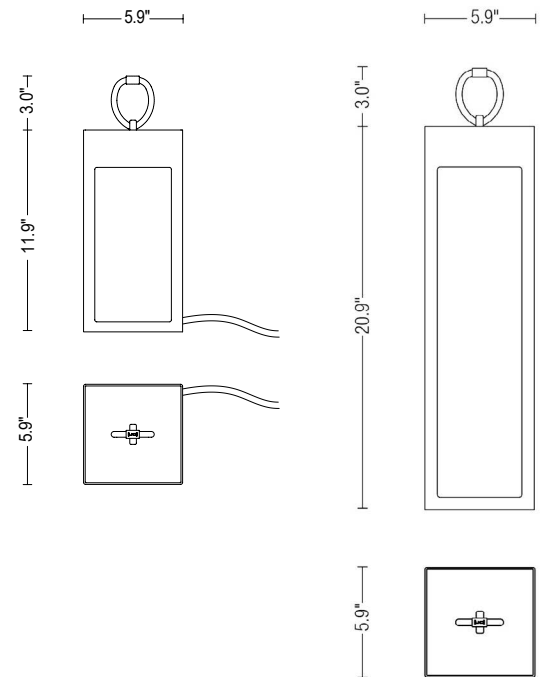

ORDERING INFORMATION

Example: LN75PORDHBBZV.US. Accessories / Power Supplies ordered separately.


		US
Model No.	Finish	US
LN75PORDHB10 (standard - 11.9" h)	L - Graphite	
LN70PORDHB40 (rechargeable - 11.9" h)	V - Oxide	
LN75PORDHBBZ (standard - 20.9" h)	U - White	
LN75PORDHB40 (rechargeable - 20.9" h)	G - Black	
Rechargeable version comes with 3.7 VDC Li-Ion battery & charging port: USB TYPE-C 5 VDC-1A 3 (charger sold separately - see page 2)		H - Gray

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA

Note: All photometric data is 3000K

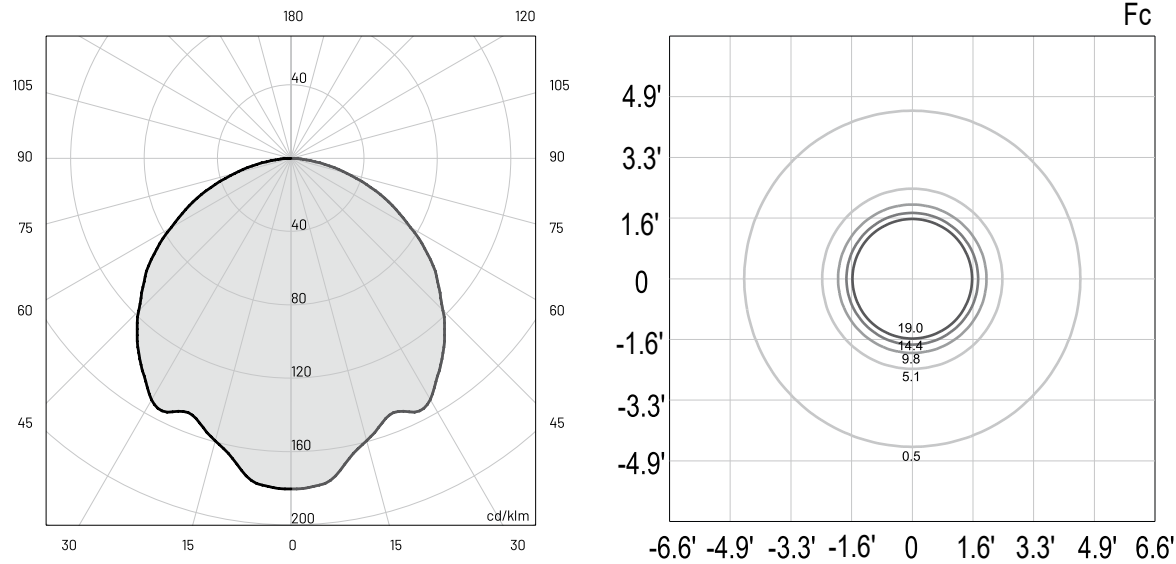

ACCESSORIES

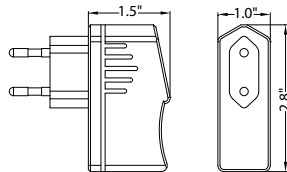

LN0409BT051
USB Charger
for Rechargeable Version

Job Name/Date:

Fixture Type Designation: