

I-LANTERN (Pole)


I-Lantern is an IP65-rated luminaire that can be used as a bollard, a garden lamp, wall-mounted or pole-mounted. The i-Lantern pole-mounted version has a height of 78.7", is suitable for outdoor installation such as driveways or gardens, and can be controlled via Bluetooth. Dark Sky compliant for output below 80°.



TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage | 26W |
| Power Supply | Integral 120-277VAC |
| Dimming | 0-10V Dimming |
| Construction | Body: Die-Cast and Extruded Aluminum Lens: Opal Polycarbonate |
| CCT | 2700K, 3000K |
| BUG Rating | B0-U0-G0 |
| CRI | >90 |
| Delivered Lumens | 1170 lm (3000K) Dark Sky compliant, output below 80° |
| Efficacy | 45 lm/W (3000K) |
| Optics | Diffuse |
| Finishes | 4 Standard, See Below |
| Fixture Dimensions | 5.91" x 5.91" x 78.9" h |
| Lumen Maintenance | L80, B15 >60,000hrs (Ta 40°C) |
| Color Consistency | 3-Step MacAdam |
| IP Rating | IP65 |
| Impact Resistance | IK08 |

Fixture Dimensions

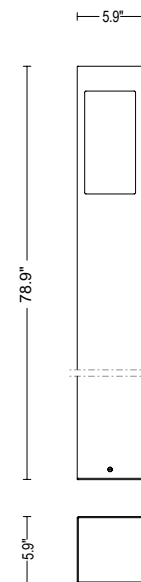

ORDERING INFORMATION

Example: LN75200DHBZV.US. Accessories ordered separately.

| | | | | | |
|------------------|---------------|------------------------|----------------|---|----|
| LN75200 | D | | BBZ | | US |
| Model No. | Optics | CCT | Power | Finish | |
| LN75200 | D - Diffuse | Y - 2700K H - 3000K | BBZ - Integral | L - Graphite V - Oxide U - White G - Black H - Gray | US |

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation



LN00ALN
Root Mounting Plate Assembly
For use when mounting in soil





LN00ALN.01P
Anchor Bolt Assembly
For use with concrete footing



PHOTOMETRIC DATA

Note: All photometric data is 3000K

10W

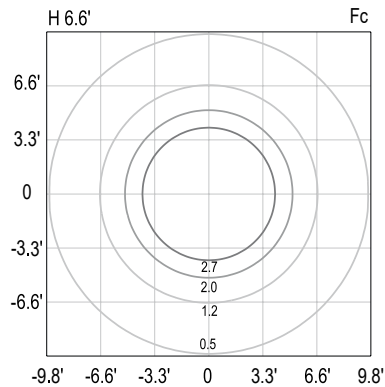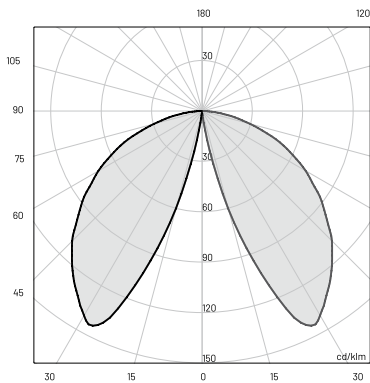

24W

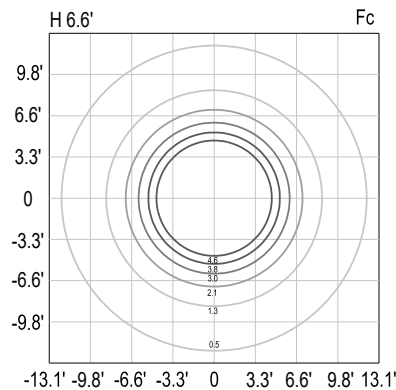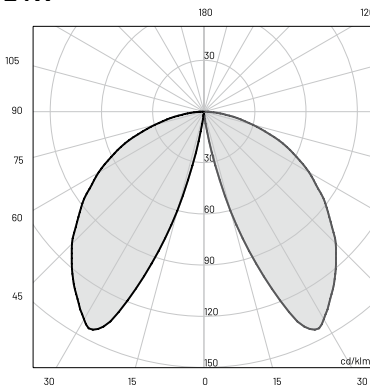

Job Name/Date:

Fixture Type Designation: