

I-Lantern (Wall)


I-Lantern is an IP65-rated luminaire that can be used as a bollard, a garden lamp, wall-mounted. The i-Lantern wall-mounted version is suitable for outdoor installation in residential and commercial areas. It is available in 3000K and 5 standard finishes.



TECHNICAL DATA

LED Wattage / Total	10W LED, 12.5W total
Power Supply	Integral 120-277VAC - 0-10V Dimming
Construction	Body: Die-Cast and Extruded Aluminum Lens: Opal Polycarbonate
CCT	3000K
BUG Rating	B0-U1-G0
CRI	>90
Delivered Lumens	700 lm (12.5W - 3000K)
Efficacy	56 lm/W (12.5W - 3000K)
Optics	Diffused
Finishes	5 Standard, See Below
Fixture Dimensions	5.91" x 7.50" x 11.9" h
Lumen Maintenance	L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions

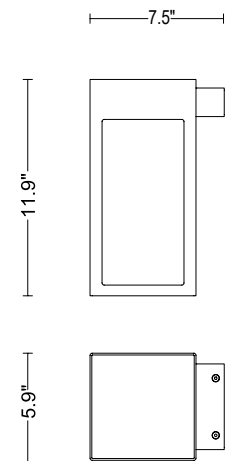

ORDERING INFORMATION

Example: LN70PARDHB10V.US. Power Supplies ordered separately.



LN70PARDHB10		US
Model No.	Finish	
LN70PARDHB10 - 12.5W	L - Graphite	US
	V - Oxide	
	U - White	
	G - Black	
	H - Gray	

Job Name/Date:



Fixture Type Designation:

PHOTOMETRIC DATA

Note: All photometric data is 3000K

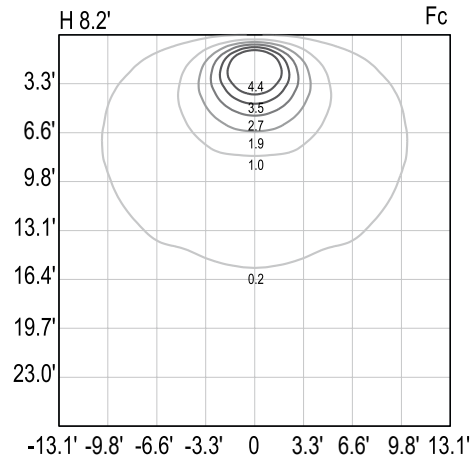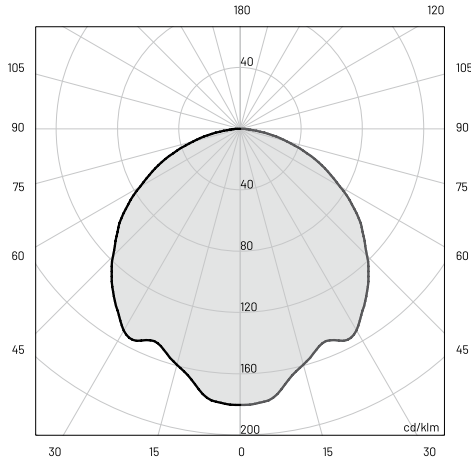

MOUNTING - Included

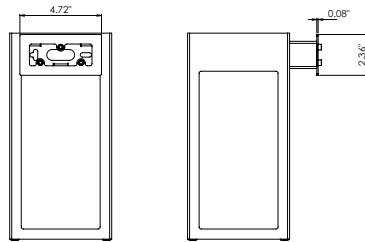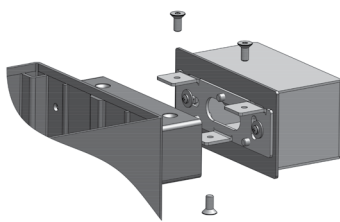

Job Name/Date:

Fixture Type Designation: