



designplan 

INTONO C OUT

OUTDOOR CEILING MOUNTED FOR PRIVATE HOMES AND HOSPITALITY
WITH LIGHT OUTPUT ALONE OR ALSO WITH SPEAKER



2700K 3000K 4000K

OUTDOOR

INDOOR



NEW **INTONO C OUT 2.4**
12W 120VAC



NEW **INTONO C IN 2.3**
12W 120VAC



NEW **INTONO C OUT 3.4**
20W 120VAC
ON/OFF, 0-10V



NEW **INTONO C IN 3.3**
20W 120VAC
ON/OFF, 0-10V



NEW **INTONO C OUT 3.9**
9W 24VDC




NEW **INTONO C IN 3.8**
9W 24VDC




INTONO C OUT



INTONO C OUT 2.4




Asymmetrical optics
(Intono C OUT 3.4)

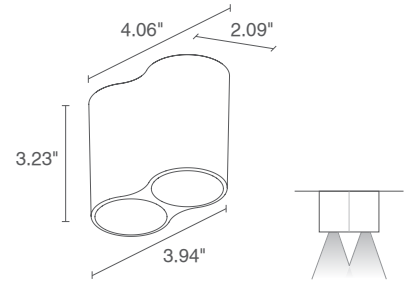

^
INTONO C OUT 3.9
speaker:
maximum power
nominal impedance Z
mean sound pressure level

3W
16 Ohm
86 dB (1W/1m - 3.28')



v
INTONO C OUT 3.4
version painted with primer



POWER / POWER SUPPLY	12W 120VAC
MODEL NO.	NC2410 00 E White NC2410 00 F Grey NC2410 00 H Anthracite NC2410 00 T Cor-ten NC2410 00 7 Primer

CRI	0 - CRI 80 1 - CRI >90
CONTROL SYSTEM	on/off

HONEYCOMB LOUVRE	0 - not present 1 - present (not compatible with diffuse optics)
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	TT - 11° MM - 34° KK - 68° DD - diffuse

LUMEN OUTPUT AT SOURCE	976 lm (3000K, CRI 80)
-------------------------------	------------------------

DELIVERED LUMEN OUTPUT	704 lm (3000K, 34°, CRI 80)
-------------------------------	-----------------------------

NO. AND TYPE OF LED	2 power LEDs 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
----------------------------	---

MATERIAL	body in die-cast aluminum lens in black-serigraphed, transparent, tempered extra-clear glass
-----------------	---

POWER SUPPLY UNIT	built in
--------------------------	----------


MOUNTING	surface mounted (ceiling)
-----------------	---------------------------

FEATURES	easy installation thanks to 4-point magnetic attachment
-----------------	---

NOTES	indoor version: Intono C IN 2.3 version compatible with Google Home or Amazon Echo available on request for voice command control
--------------	--




INTONO C OUT 3.4

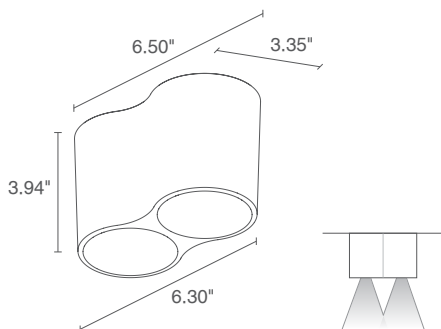

LED TECH 2.98 lbs IK06 IP65 0-10V



INTONO C OUT 3.9

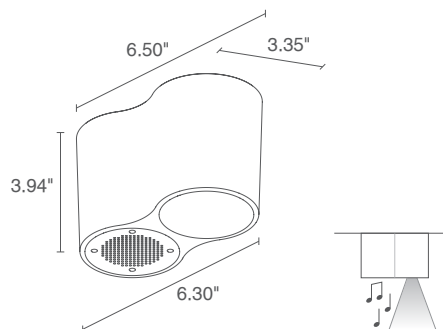

LED TECH 2.98 lbs IK06 IP65

20W 120VAC

- NC3410 0 0 0 0 E White
- NC3410 0 0 0 0 F Grey
- NC3410 0 0 0 0 H Anthracite
- NC3410 0 0 0 0 T Cor-ten
- NC3410 0 0 0 0 7 Primer

9W 24VDC

- NC3900 00 00 00 M9 E White
- NC3900 00 00 00 M9 F Grey
- NC3900 00 00 00 M9 H Anthracite
- NC3900 00 00 00 M9 T Cor-ten
- NC3900 00 00 00 M9 7 Primer

0 - CRI 80 1 - CRI >90
0 - on/off D - DALI R - 0-10V
0 - not present 1 - present (not compatible with the asymmetrical optics)
F - 2700K 5 - 3000K 9 - 4000K
SS - 15° MM - 20° LL - 43° AA - asymmetrical
1976 lm (3000K, CRI 80)
1674 lm (3000K, 15°, CRI 80)
2 high power density COB LEDs 2-step MacAdam, 50,000h L95 B10 (Ta 25°C)
body in die-cast aluminum lens in black-serigraphed, transparent, tempered extra-clear glass
built in
surface mounted (ceiling)
easy installation thanks to 4-point magnetic attachment
indoor version: Intono C IN 3.3 version compatible with Google Home or Amazon Echo available on request for voice command control

0 - CRI 80 1 - CRI >90
0 - not present 1 - present
F - 2700K 5 - 3000K 9 - 4000K
20°
988 lm (3000K, CRI 80)
783 lm (3000K, 20°, CRI 80)
1 high power density COB LED 2-step MacAdam, 50,000h L95 B10 (Ta 25°C)
body in die-cast aluminum lens in black-serigraphed, transparent, tempered extra-clear glass
not included
surface mounted (ceiling)
easy installation thanks to 4-point magnetic attachment
indoor version: Intono C IN 3.8 version compatible with Google Home or Amazon Echo available on request for voice command control

INTONO C OUT

ACCESSORIES AND POWER SUPPLY UNITS

ACCESSORIES



WUNT39A00

Bluetooth 3.0 audio control kit with power supply unit and amplifier (for Alexa or Google voice-control systems)
(Intono C OUT 3.9)




WUNT39A01

Wi-Fi light control kit
(Intono C OUT 3.9)

∨
INTONO C OUT 3.4
20W, asymmetrical optics



∨
INTONO C OUT 3.4
20W, asymmetrical optics

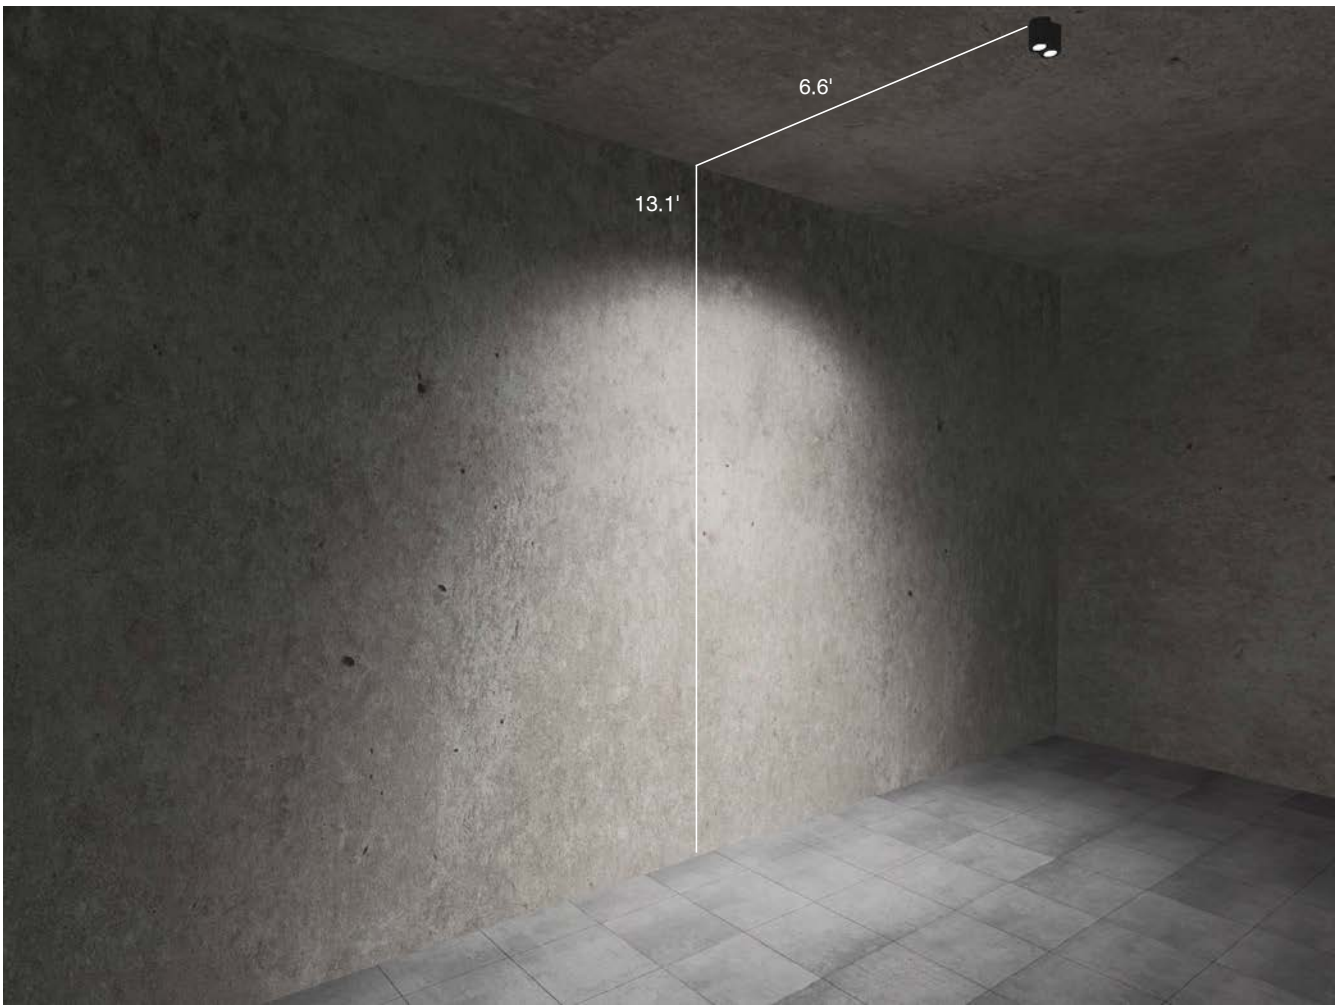




INTONO C IN 2.3
3000K, 12W, 34°, antique bronze

INTONO C IN

INDOOR CEILING MOUNTED FOR PRIVATE HOMES AND HOSPITALITY
WITH LIGHT OUTPUT ALONE OR ALSO WITH SPEAKER



2700K 3000K 4000K



INDOOR

OUTDOOR



NEW **INTONO C IN 2.3**
12W 120VAC




NEW **INTONO C OUT 2.4**
12W 120VAC



NEW **INTONO C IN 3.3**
20W 500mA
ON/OFF, 0-10V



NEW **INTONO C OUT 3.4**
20W 500mA
ON/OFF, 0-10V



NEW **INTONO C IN 3.8**
9W 24VDC



NEW **INTONO C OUT 3.9**
9W 24VDC



^
INTONO C IN 3.8


speaker:
maximum power
nominal impedance Z
mean sound pressure level

3W
16 Ohm
86 dB (1W/1m)



INTONO C IN



INTONO C IN 2.3




Asymmetrical optics
(Intono C* / 3.3)

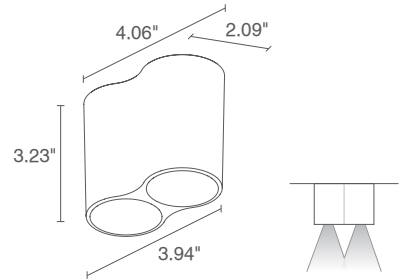

v
INTONO C IN 3.3


version painted with primer

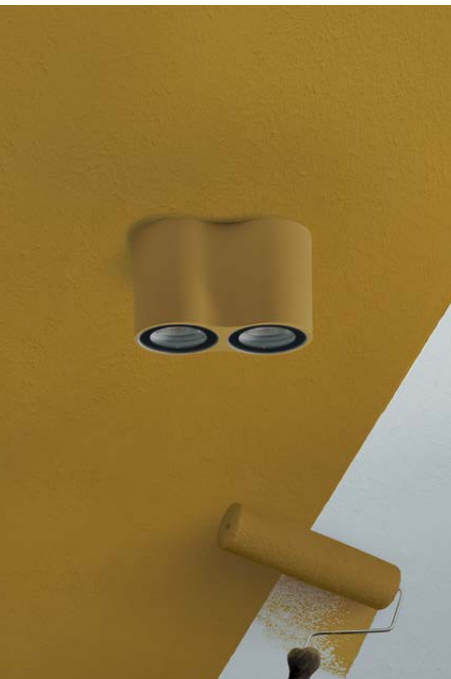

POWER / POWER SUPPLY MODEL NO.	12W 120VAC NC2310 00 B White NC2310 00 N Black NC2310 00 Z Antique bronze NC2310 00 7 Primer
CRI	0 - CRI 80 1 - CRI >90
CONTROL SYSTEM	on/off
HONEYCOMB LOUVRE	0 - not present 1 - present (not compatible with diffuse optics)
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	TT - 11° MM - 34° KK - 68° DD - diffuse
LUMEN OUTPUT AT SOURCE	976 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT	704 lm (3000K, 34°, CRI 80)
NO. AND TYPE OF LED	2 power LEDs 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in black-serigraphed, transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling)
FEATURES	easy installation thanks to 4-point magnetic attachment
NOTES	outdoor version: Intono C OUT 2.4 version compatible with Google Home or Amazon Echo available on request for voice command control




INTONO C IN 3.3

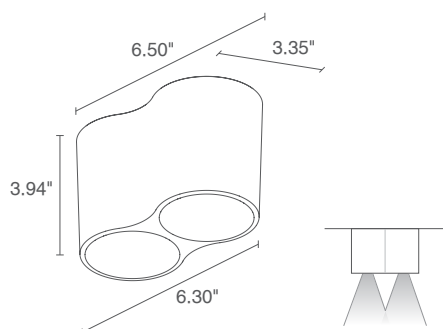

LED TECH 2.54 lbs IK06 IP40 0-10V



INTONO C IN 3.8

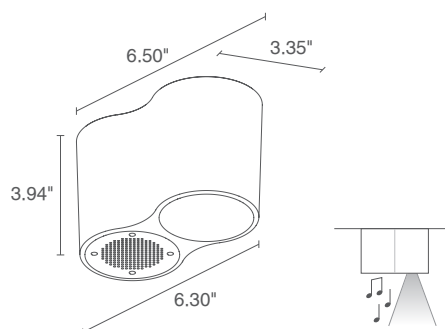

LED TECH 2.54 lbs IK06 IP40

20W 500mA

NC3310 0 0 0 0 B White
 NC3310 0 0 0 0 N Black
 NC3310 0 0 0 0 Z Antique bronze
 NC3310 0 0 0 0 7 Primer

0 - CRI 80 1 - CRI >90
0 - on/off D - DALI R - 0/1-10V
0 - not present 1 - present (not compatible with the asymmetrical optics)
F - 2700K 5 - 3000K 9 - 4000K
SS - 15° MM - 20° LL - 43° AA - asymmetrical

1976 lm (3000K, CRI 80)

1674 lm (3000K, 15°, CRI 80)

2 high power density COB LEDs
 2-step MacAdam, 50,000h L95 B10 (Ta 25°C)

body in die-cast aluminum
 lens in black-serigraphed, transparent, tempered
 extra-clear glass

built in

surface mounted (ceiling)

easy installation thanks to 4-point
 magnetic attachment

outdoor version: Intono C OUT 3.4
 version compatible with Google Home
 or Amazon Echo available on request
 for voice command control

9W 24VDC

NC3800 00 00 M9 B White
 NC3800 00 00 M9 N Black
 NC3800 00 00 M9 Z Antique bronze
 NC3800 00 00 M9 7 Primer

0 - CRI 80 1 - CRI >90
0 - not present 1 - present
F - 2700K 5 - 3000K 9 - 4000K
20°

988 lm (3000K, CRI 80)

783 lm (3000K, 20°, CRI 80)

1 high power density COB LED
 2-step MacAdam, 50,000h L95 B10 (Ta 25°C)

body in die-cast aluminum
 lens in black-serigraphed, transparent, tempered
 extra-clear glass

not included

surface mounted (ceiling)

easy installation thanks to 4-point
 magnetic attachment

outdoor version: Intono C OUT 3.9
 version compatible with Google Home
 or Amazon Echo available on request
 for voice command control

INTONO C IN

ACCESSORIES AND POWER SUPPLY UNITS

ACCESSORIES



WUNT39A00

Bluetooth 3.0 audio control kit with power supply unit and amplifier (for Alexa or Google voice-control systems)

Mounted with TCI driver, item code #122201

(Intono C IN 3.8)




WUNT39A01

Wi-Fi light control kit
NOT UL LISTED
(Intono C IN 3.8)


∨

INTONO C IN 3.3

20W, asymmetrical optics

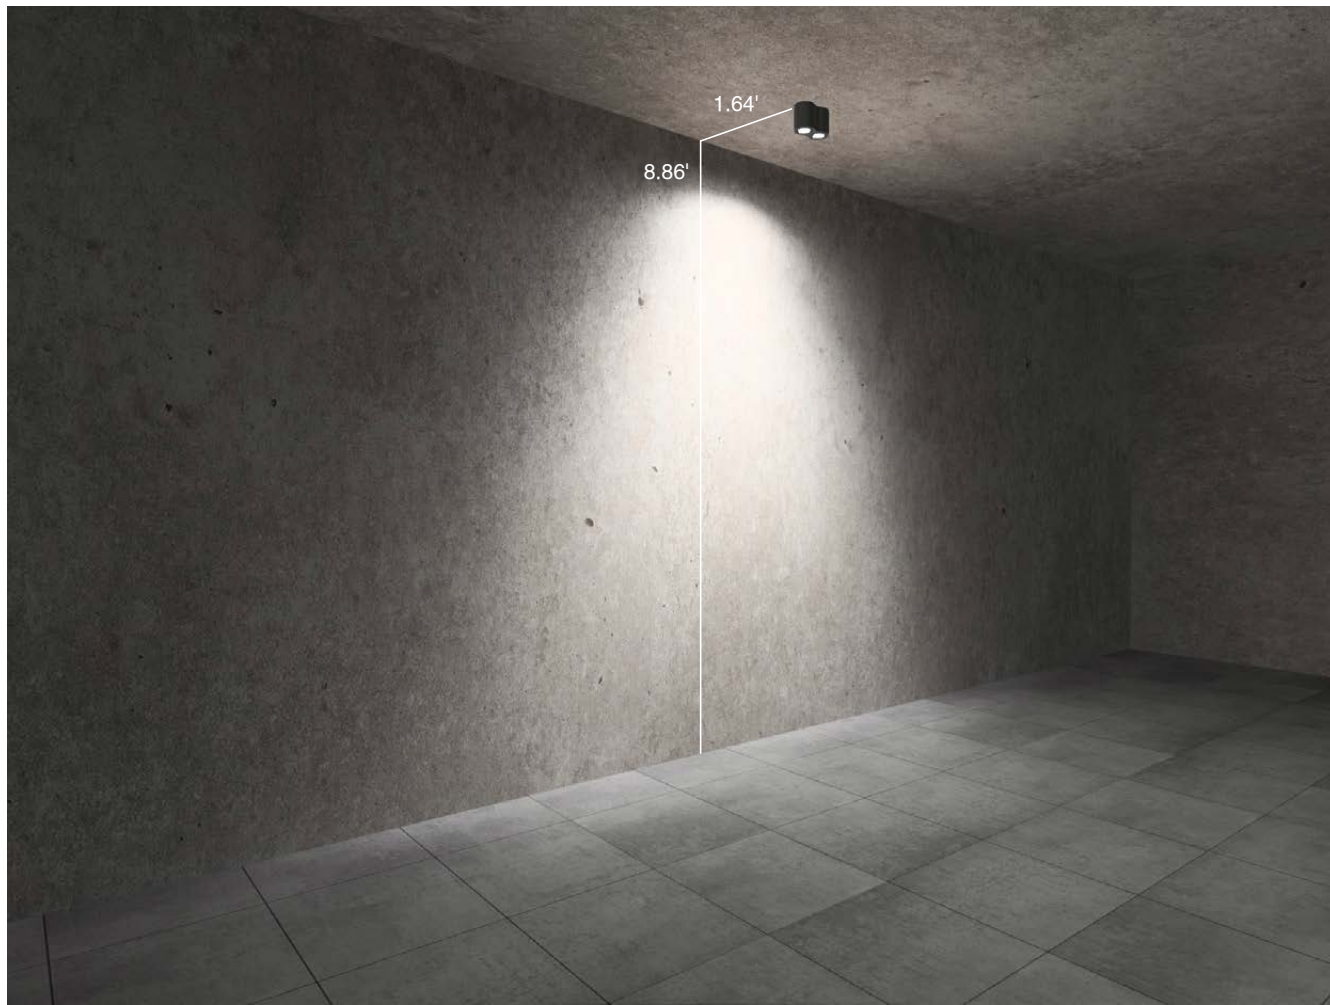

√
INTONO C IN 3.3
20W, asymmetrical optics

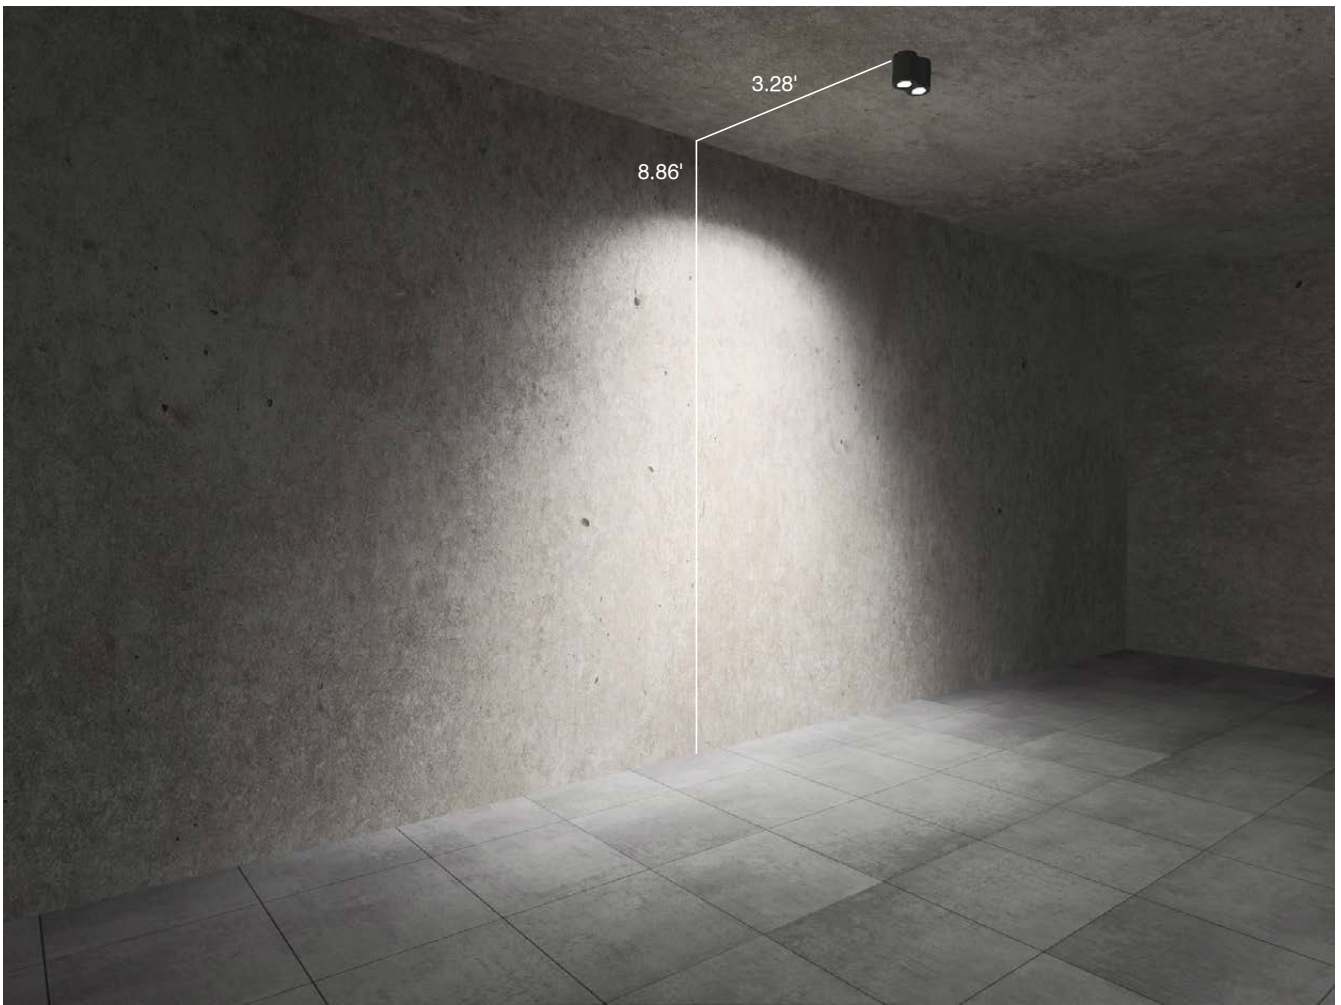


INTONO C IN / INTONO C OUT


INDOOR CEILING MOUNTED / OUTDOOR CEILING MOUNTED

INTONO C IN 2.3 INTONO C OUT 2.4


TT - 11° CRI 80

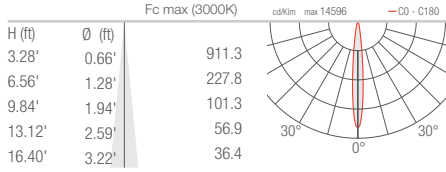


MM - 34° CRI 80

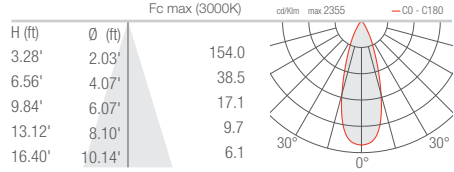

KK - 68° CRI 80

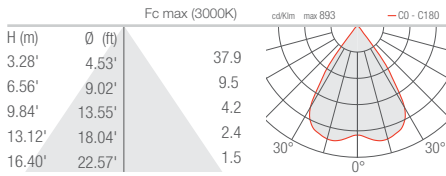


DD - Diffuse CRI 80

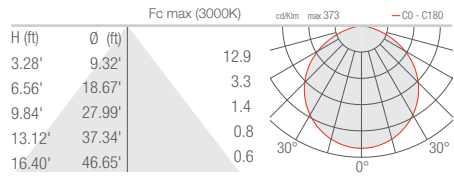


INTONO C IN 3.3 INTONO C OUT 3.4


SS - 15° CRI 80

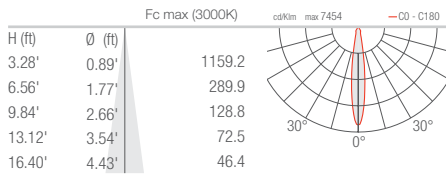


MM - 20° CRI 80

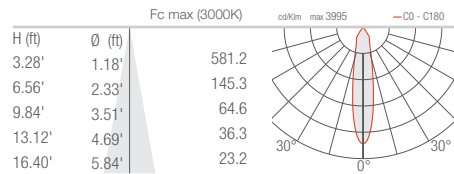

LL - 43° CRI 80

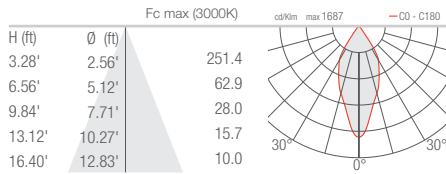

AA - Asymmetrical CRI 80

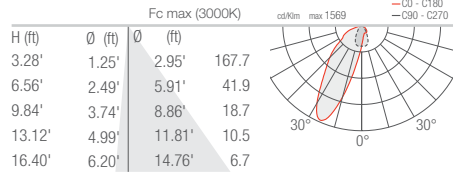

INTONO C IN 3.8 INTONO C OUT 3.9

M - 20° CRI 80

