

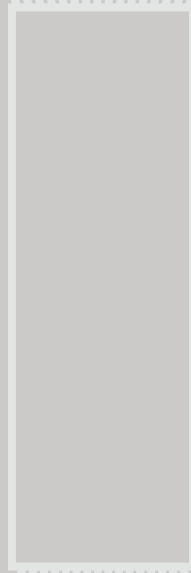


**INTONO**



designplan™ 

**L&L**  
Luce & Light

# INTONO

VOICE-RESPONSIVE LIGHT AND SOUND,  
IN TUNE WITH ITS SURROUNDINGS

OUTDOOR WALL MOUNTED



Luce & Light

designplan™ 

79 Trenton Avenue  
Frenchtown, NJ 08825

Tel: (908) 996-7710  
Fax: (908) 996-7042




## INTONO

---

**The new, chameleon-like wall-mounted fixture that blends in with the wall. The fixture's body, whose dominant traits are minimalism and elegance, is a slender cylinder connected to the wall by a sinuous double curve. Suitable for outdoor installation on facades, this lamp is smart, enabled for sound and blends in.**

IP65



# INTONO

FINISH, SMART, SOUND

A VERSION COVERED IN A NEUTRAL, BONDING PRIMER ALLOWS THE SURFACE TO BE PAINTED WITH THE SAME WALL PAINT AS THE WALL IT'S ATTACHED TO, FOCUSING ATTENTION ON THE LIGHT OUTPUT ALONE.

**FINISH**

COMMUNICATES WITH SMART SPEAKERS SUCH AS GOOGLE HOME OR AMAZON ECHO OVER WI-FI USING THE ZIGBEE PROTOCOL, WITH QUICK VOICE COMMANDS – AVAILABLE ON REQUEST.

**SMART**


IT CAN ACCOMMODATE A SPEAKER TO PLAY YOUR PLAYLISTS FROM SPOTIFY OR AMAZON MUSIC.

**SOUND**


# INTONO

## HOME AUTOMATION

LOUNGE PLAYLIST IN THE RESTAURANT, WITH 50% LIGHTS, AND APERITIF PLAYLIST IN THE GARDEN, WITH 100% LIGHTS.

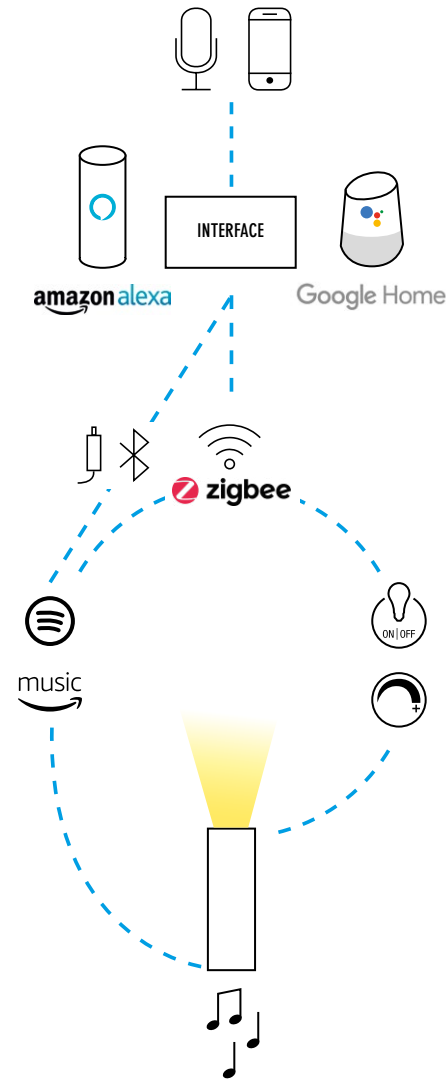

VERSION COMPATIBLE WITH GOOGLE HOME OR AMAZON ECHO  
AVAILABLE ON REQUEST FOR VOICE COMMAND CONTROL


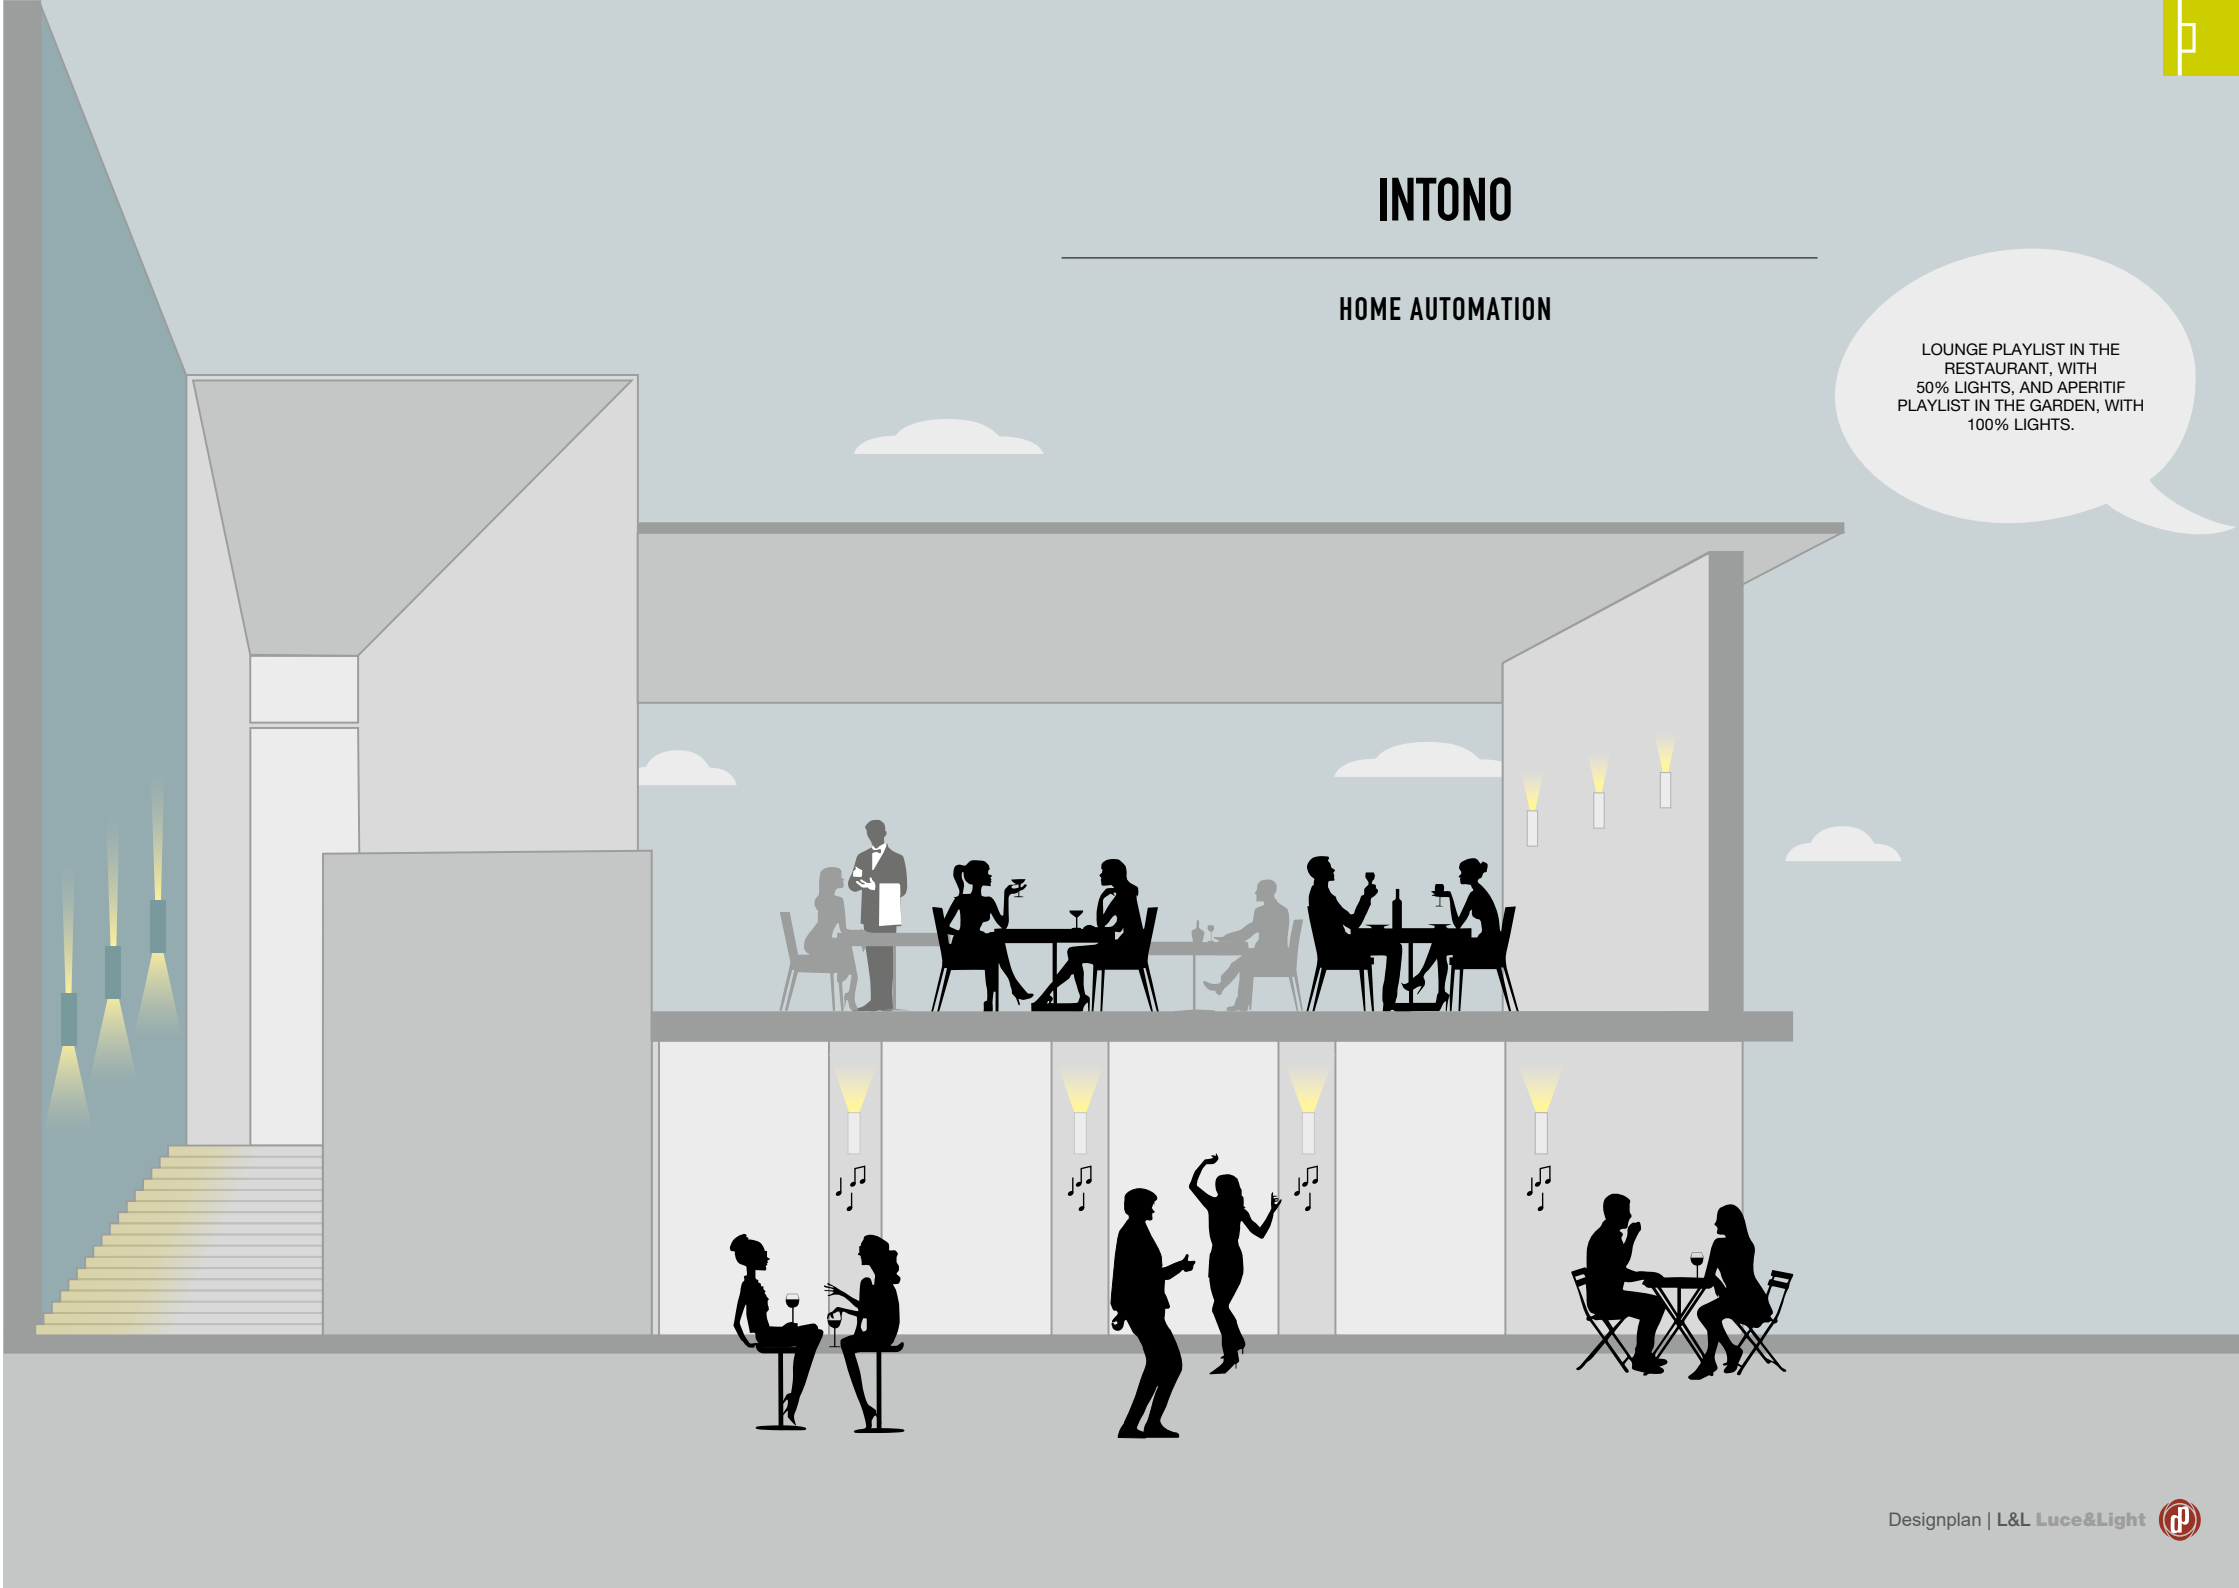










# INTONO

## FINISHES



 White	 Grey
 Anthracite	 Cor-ten
 Primer	 RAL finish on request

# INTONO


## OPTICS


IN THE TWO-BEAM VERSION, INTONO CAN HAVE THESE CONFIGURATIONS, OR FURTHER ONES ON REQUEST. RECESSED OPTICS TO ENSURE HIGH VISUAL COMFORT.

### INTONO 3.2

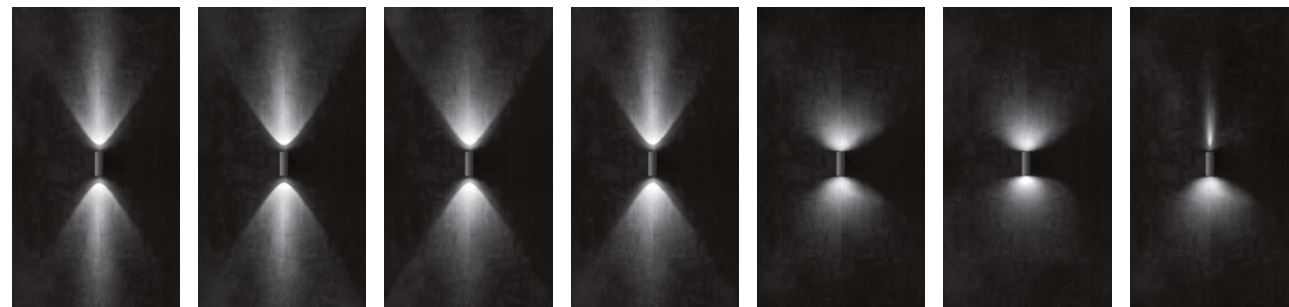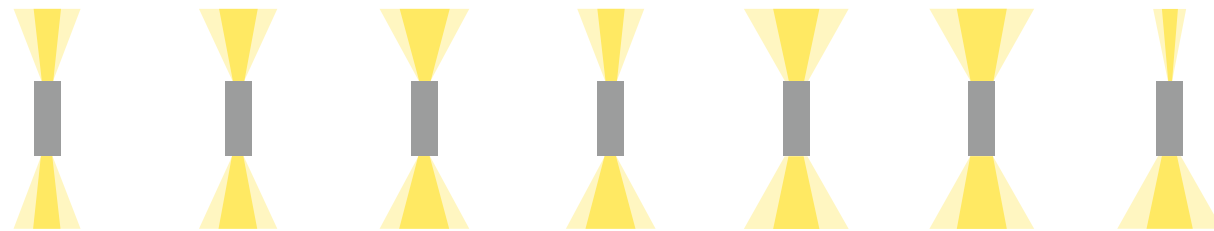


**SS** 15°+15°    **MM** 20°+20°    **LL** 43°+43°    **SL** 15°+43°    **WW** wall grazing + wall grazing    **WA** wall grazing + asymmetrical    **ZW** asymmetrical 11° + wall grazing

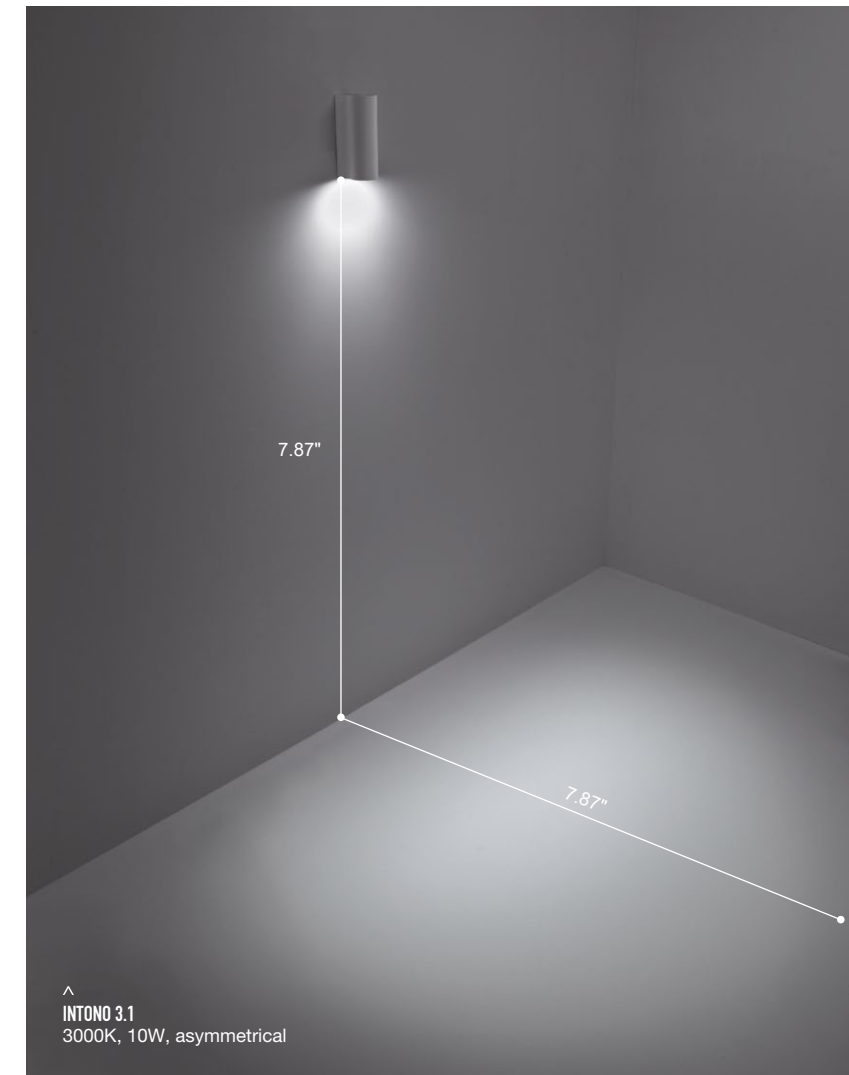

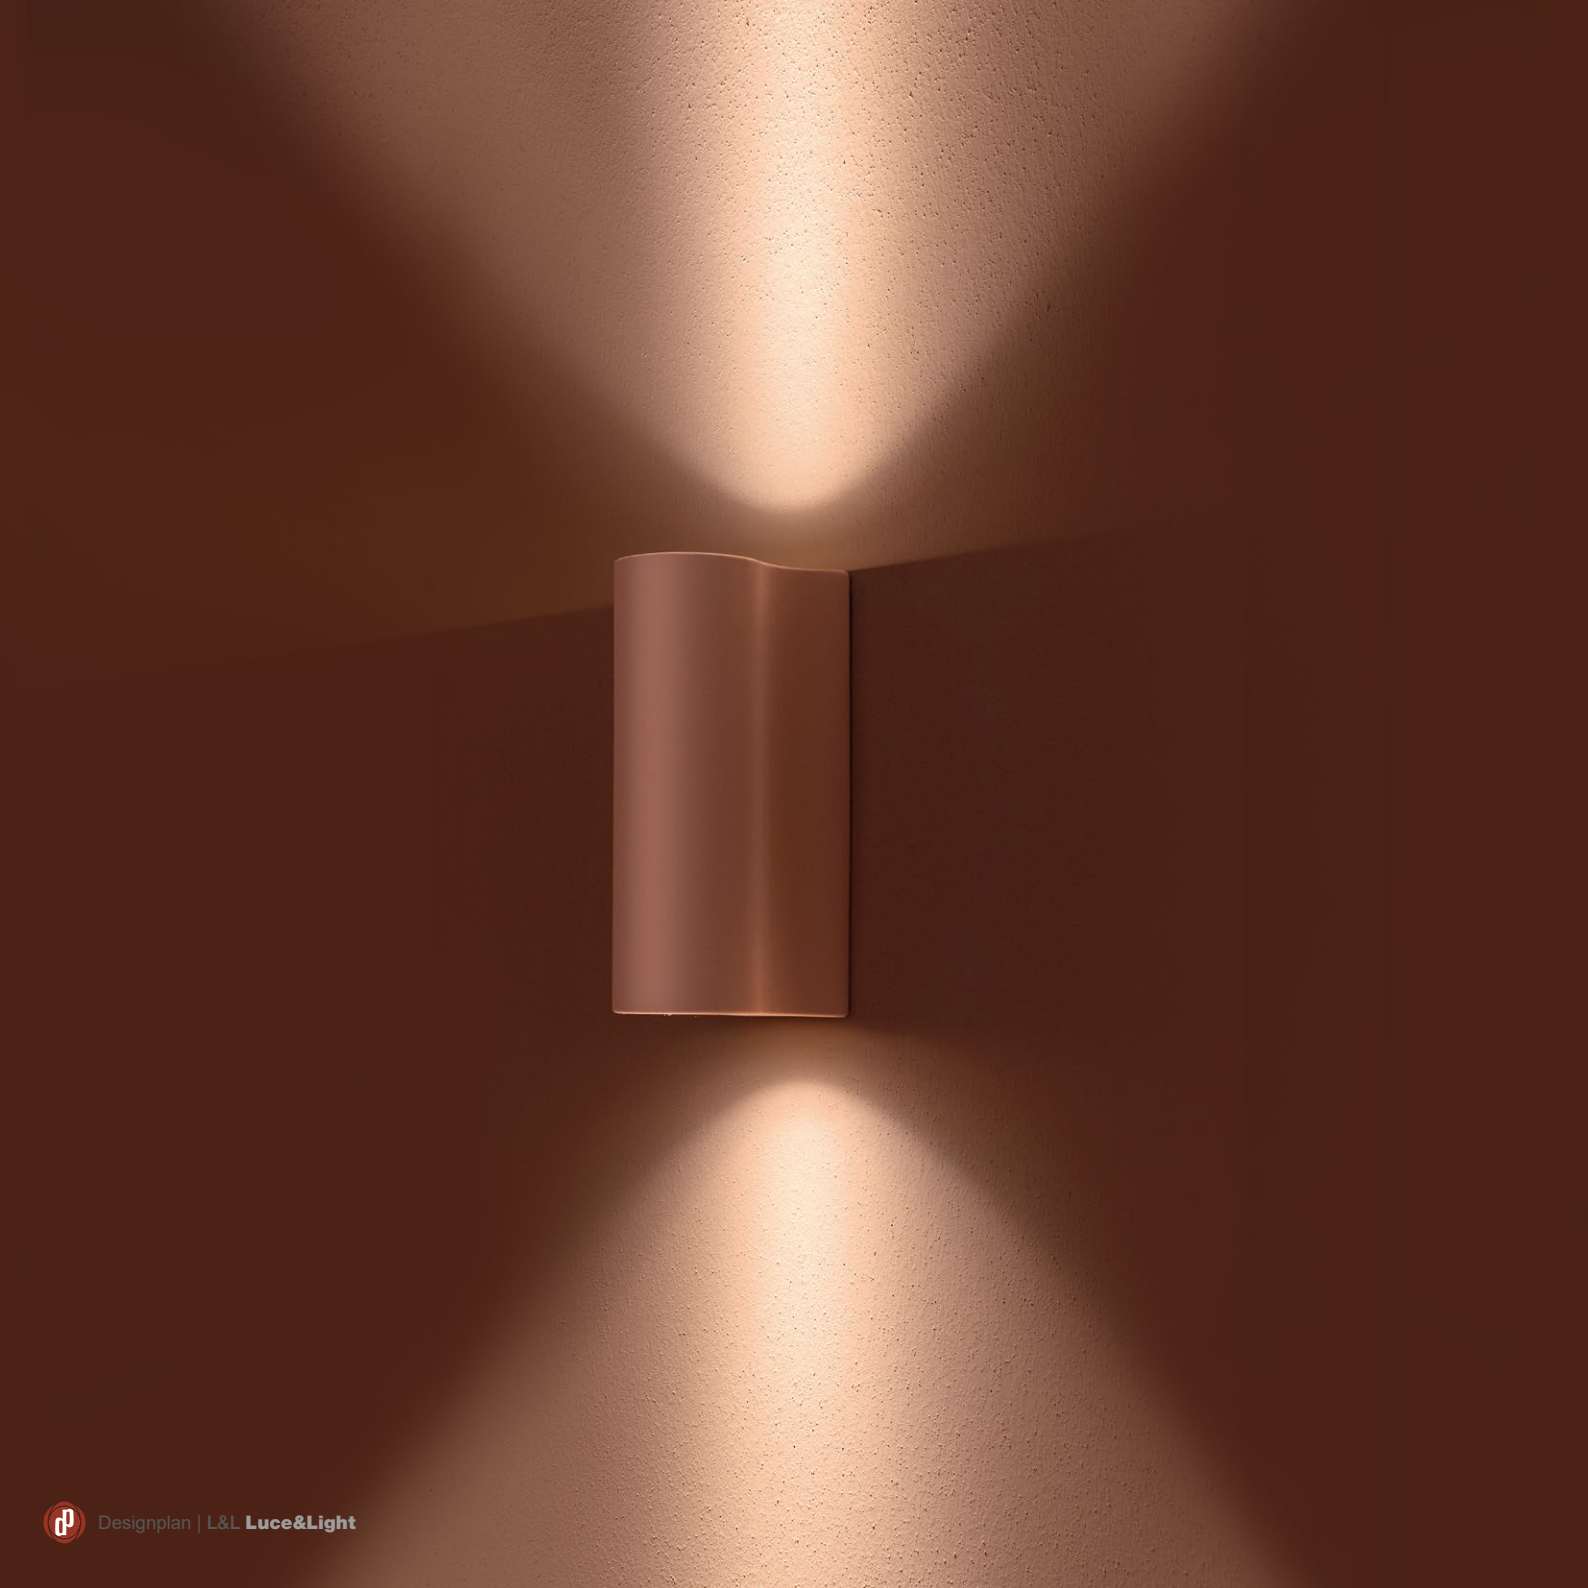

# INTONO

OUTDOOR WALL MOUNTED




● 2700K ● 3000K ● 4000K

		<b>INTONO 1.1</b> 3W 24VDC		<b>INTONO 2.1</b> 6W 24VDC		<b>INTONO 3.1</b> 10W 120VAC		<b>INTONO 4.1</b> 19W 120VAC
		<b>INTONO 1.2</b> 6W 24VDC		<b>INTONO 2.2</b> 12W 24VDC		<b>INTONO 3.2</b> 20W 120VAC		<b>INTONO 4.2</b> 38W 120VAC
						<b>INTONO 3.9</b> 9W 24VDC		<b>INTONO 4.9</b> 17W 24VDC





## INTONO 1.1



<b>POWER / POWER SUPPLY</b>	3W 24VDC
<b>MODEL NO.</b>	<b>NT1100</b> <span style="color: green;">00</span> <span style="color: orange;">0</span> <span style="color: grey;">E</span> White <b>NT1100</b> <span style="color: green;">00</span> <span style="color: orange;">0</span> <span style="color: grey;">F</span> Grey <b>NT1100</b> <span style="color: green;">00</span> <span style="color: orange;">0</span> <span style="color: grey;">H</span> Anthracite <b>NT1100</b> <span style="color: green;">00</span> <span style="color: orange;">0</span> <span style="color: grey;">T</span> Cor-ten <b>NT1100</b> <span style="color: green;">00</span> <span style="color: orange;">0</span> <span style="color: grey;">7</span> Primer
<b>CRI</b>	<b>0</b> - CRI 80 <b>1</b> - CRI >90
<b>HONEYCOMB LOUVRE</b>	<b>0</b> - not present <b>1</b> - present
<b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	<b>S</b> - 13° <b>M</b> - 22° <b>L</b> - 33°
<b>LUMEN OUTPUT AT SOURCE</b>	168 lm (3000K, CRI 80)
<b>DELIVERED LUMEN OUTPUT</b>	146 lm (3000K, 22°, CRI 80)
<b>NO. AND TYPE OF LED</b>	1 power LED 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)
<b>MATERIAL</b>	body in die-cast aluminum, lens in black-serigraphed, tempered, transparent extra-clear glass
<b>POWER SUPPLY UNIT</b>	Remote power supply required, not included

## INTONO 1.2



<b>POWER / POWER SUPPLY</b>	6W 24VDC
<b>MODEL NO.</b>	<b>NT1200</b> <span style="color: green;">00</span> <span style="color: orange;">0</span> <span style="color: grey;">E</span> White <b>NT1200</b> <span style="color: green;">00</span> <span style="color: orange;">0</span> <span style="color: grey;">F</span> Grey <b>NT1200</b> <span style="color: green;">00</span> <span style="color: orange;">0</span> <span style="color: grey;">H</span> Anthracite <b>NT1200</b> <span style="color: green;">00</span> <span style="color: orange;">0</span> <span style="color: grey;">T</span> Cor-ten <b>NT1200</b> <span style="color: green;">00</span> <span style="color: orange;">0</span> <span style="color: grey;">7</span> Primer
<b>CRI</b>	<b>0</b> - CRI 80 <b>1</b> - CRI >90
<b>HONEYCOMB LOUVRE</b>	<b>0</b> - not present <b>1</b> - present
<b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	<b>SS</b> - 13°+13° <b>MM</b> - 22°+22° <b>LL</b> - 33°+33° <b>SL</b> - 13°+33°
<b>LUMEN OUTPUT AT SOURCE</b>	168 lm (3000K, CRI 80) per beam
<b>DELIVERED LUMEN OUTPUT</b>	146 lm (3000K, 22°, CRI 80) per beam
<b>NO. AND TYPE OF LED</b>	2 power LEDs 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)
<b>MATERIAL</b>	body in die-cast aluminum, lens in black-serigraphed, tempered, transparent extra-clear glass
<b>POWER SUPPLY UNIT</b>	Remote power supply required, not included




^  
INTONO 1.1  
3000K, 3W, 13°, grigio/grey





## INTONO 2.1



LED TECH kg 1.39 lbs IP65 IK04

<b>POWER / POWER SUPPLY</b>	6W 24VDC
<b>MODEL NO.</b>	<b>NT2110 00 0 0 E</b> White <b>NT2110 00 0 0 F</b> Grey <b>NT2110 00 0 0 H</b> Anthracite <b>NT2110 00 0 0 T</b> Cor-ten <b>NT2110 00 0 0 7</b> Primer

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>HONEYCOMB LOUVRE</b>	0 - not present 1 - present
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	Z - asymmetrical 8° T - 11° M - 34° K - 68° D - diffuse

**LUMEN OUTPUT AT SOURCE** 488 lm (3000K, CRI 80)

**DELIVERED LUMEN OUTPUT** 352 lm (3000K, 34°, CRI 80)


**NO. AND TYPE OF LED** 1 power LED  
3-step MacAdam, 50000h L90 B10 (Ta 25°C)

**MATERIAL** body in die-cast aluminum,  
lens in black-serigraphed, tempered,  
transparent extra-clear glass

**POWER SUPPLY UNIT** remote power supply required, not included

**NOTES** Honeycomb Louvre **NOT** available with diffuse (D) and asymmetrical 8° (Z) optics.

## INTONO 2.2



LED TECH 1.39 lbs IP65 IK04

<b>POWER / POWER SUPPLY</b>	12W 24VDC
<b>MODEL NO.</b>	<b>NT2210 00 0 0 E</b> White <b>NT2210 00 0 0 F</b> Grey <b>NT2210 00 0 0 H</b> Anthracite <b>NT2210 00 0 0 T</b> Cor-ten <b>NT2210 00 0 0 7</b> Primer

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>HONEYCOMB LOUVRE</b>	0 - not present 1 - present
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	TT - 11° + 11° TK - 11° + 68° MM- 34° + 34° KK - 68° + 68° DD - diffuse + diffuse ZK - asymmetrical 8° + 68°

**LUMEN OUTPUT AT SOURCE** 488 lm (3000K, CRI 80)  
per beam

**DELIVERED LUMEN OUTPUT** 352 lm (3000K, 34°, CRI 80)  
per beam

**NO. AND TYPE OF LED** 2 power LEDs  
3-step MacAdam, 50000h L90 B10 (Ta 25°C)

**MATERIAL** body in die-cast aluminum,  
lens in black-serigraphed, tempered,  
transparent extra-clear glass

**POWER SUPPLY UNIT** remote power supply required, not included


**NOTES** Honeycomb Louvre **NOT** available with asymmetrical 8° + 68° (ZK) and diffuse + diffuse (DD) optics.



^  
**INTONO 3.9**  
 speaker:  
 maximum power 3W  
 nominal impedance Z 16 Ohm  
  
 mean sound pressure level 86 dB (1W/1m)

**WUNT39A00**  
 Kit controller audio  
 Bluetooth 3.0 audio control kit  
 with power supply unit and amplifier  
 (for Alexa or Google voice-control systems)

### INTONO 3.1



LED TECH 4.85 lbs IP65 IK04

<b>POWER / POWER SUPPLY</b>	10W 120VAC
<b>MODEL NO.</b>	<b>NT3110</b> <b>E</b> White <b>NT3110</b> <b>F</b> Grey <b>NT3110</b> <b>H</b> Anthracite <b>NT3110</b> <b>T</b> Cor-ten <b>NT3110</b> <b>7</b> Primer

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>CONTROL SYSTEM</b>	0 - on/off R - 1-10V
<b>HONEYCOMB LOUVRE</b>	0 - not present 1 - present
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	Z - asymmetrical 11° S - 15° M - 20° L - 43° W - wall grazing A - asymmetrical

**LUMEN OUTPUT AT SOURCE** 988 lm (3000K, CRI 80)

**DELIVERED LUMEN OUTPUT** 837 lm (3000K, 15°, CRI 80)


**NO. AND TYPE OF LED** 1 COB LED High Density  
2-step MacAdam, 50000h L95 B10 (Ta 25°C)

**MATERIAL** body in die-cast aluminum,  
lens in black-serigraphed, tempered,  
transparent extra-clear glass

**POWER SUPPLY UNIT** built in

**NOTES** Honeycomb Louvre **NOT** available with  
asymmetrical 11° (Z), wall grazing (W) and  
asymmetrical (A) optics.

### INTONO 3.2



LED TECH 4.85 lbs IP65 IK04

<b>POWER / POWER SUPPLY</b>	20W 120VAC
<b>MODEL NO.</b>	<b>NT3210</b> <b>E</b> White <b>NT3210</b> <b>F</b> Grey <b>NT3210</b> <b>H</b> Anthracite <b>NT3210</b> <b>T</b> Cor-ten <b>NT3210</b> <b>7</b> Primer

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>CONTROL SYSTEM</b>	0 - on/off R - 1-10V
<b>HONEYCOMB LOUVRE</b>	0 - not present 1 - present
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	SS - 15°+ 15° MM - 20°+ 20° LL - 43°+ 43° SL - 15°+ 43° WW - wall grazing + wall grazing WA - wall grazing + asymmetrical ZW - asymmetrical 11°+ wall grazing

**LUMEN OUTPUT AT SOURCE** 988 lm (3000K, CRI 80)  
per beam

**DELIVERED LUMEN OUTPUT** 837 lm (3000K, 15°, CRI 80)  
per beam


**NO. AND TYPE OF LED** 2 COB LEDs High Density  
2-step MacAdam, 50000h L95 B10 (Ta 25°C)

**MATERIAL** body in die-cast aluminum,  
lens in black-serigraphed, tempered,  
transparent extra-clear glass

**POWER SUPPLY UNIT** built in

**NOTES** Honeycomb Louvre **NOT** available with  
11° + wall grazing (ZW), wall grazing + asymmetrical  
(WA) and wall grazing + wall grazing (WW) optics.

### INTONO 3.9



LED TECH 4.94 lbs IP65 IK04

<b>POWER / POWER SUPPLY</b>	9W 24VDC
<b>MODEL NO.</b>	<b>NT3900</b> <b>9 E</b> White <b>NT3900</b> <b>9 F</b> Grey <b>NT3900</b> <b>9 H</b> Anthracite <b>NT3900</b> <b>9 T</b> Cor-ten <b>NT3900</b> <b>9 7</b> Primer

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>CONTROL SYSTEM</b>	0 - on/off R - 1-10V
<b>HONEYCOMB LOUVRE</b>	0 - not present 1 - present
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	Z - asymmetrical 11° S - 15° M - 20° L - 43° W - wall grazing A - asymmetrical

**LUMEN OUTPUT AT SOURCE** 988 lm (3000K, CRI 80)

**DELIVERED LUMEN OUTPUT** 837 lm (3000K, 15°, CRI 80)

**NO. AND TYPE OF LED** 1 COB LED High Density  
2-step MacAdam, 50000h L95 B10 (Ta 25°C)

**MATERIAL** body in die-cast aluminum,  
lens in black-serigraphed, tempered,  
transparent extra-clear glass

**POWER SUPPLY UNIT** remote power supply required, not included

**NOTES** Honeycomb Louvre **NOT** available with  
asymmetrical 11° (Z), wall grazing (W)  
and asymmetrical (A) optics.



^  
INTONO 4.9

speaker:  
maximum power 3W  
nominal impedance Z 8 Ohm

mean sound pressure level 86 dB (1W/1m)


WUNT39A00

Kit controller audio

Bluetooth 3.0 audio control kit  
with power supply unit and amplifier  
(for Alexa or Google voice-control systems)



<b>POWER / POWER SUPPLY MODEL NO.</b>	19W 120VAC NT4110 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> E White NT4110 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> F Grey NT4110 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> H Anthracite NT4110 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> T Cor-ten NT4110 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> 7 Primer
<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>CONTROL SYSTEM</b>	0 - on/off R - 1-10V
<b>HONEYCOMB LOUVRE</b>	0 - not present 1 - present
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	Z - asimmetrica/asymmetrical 28° S - 12° M - 23° L - 57° W - wall grazing A - asymmetrical
<b>LUMEN OUTPUT AT SOURCE</b>	1646 lm (3000K, CRI 80)
<b>DELIVERED LUMEN OUTPUT</b>	1386 lm (3000K, 12°, CRI 80)
<b>NO. AND TYPE OF LED</b>	1 COB LED High Density 2-step MacAdam, 50000h L95 B10 (Ta 25°C)
<b>MATERIAL</b>	body in die-cast aluminum, lens in black-serigraphed, tempered, transparent extra-clear glass
<b>POWER SUPPLY UNIT</b>	built in
<b>NOTES</b>	Honeycomb Louvre <b>NOT</b> available with asymmetrical 28° (Z), wall grazing (W) and asymmetrical (A) optics.

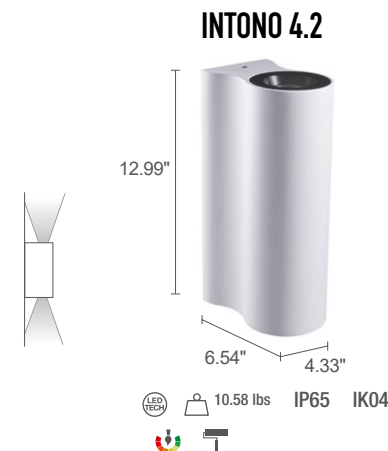

<b>POWER / POWER SUPPLY MODEL NO.</b>	38W 120VAC NT4210 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> E White NT4210 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> F Grey NT4210 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> H Anthracite NT4210 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> T Cor-ten NT4210 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> 7 Primer
<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>CONTROL SYSTEM</b>	0 - on/off R - 1-10V
<b>HONEYCOMB LOUVRE</b>	0 - not present 1 - present
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	SS - 12° + 12° MM - 23° + 23° LL - 57° + 57° SL - 12° + 57° WW - wall grazing + wall grazing WA - wall grazing + asymmetrical ZL - asymmetrical 28° + 57°
<b>LUMEN OUTPUT AT SOURCE</b>	1646 lm (3000K, CRI 80) per beam
<b>DELIVERED LUMEN OUTPUT</b>	1386 lm (3000K, 12°, CRI 80) per beam
<b>NO. AND TYPE OF LED</b>	2 COB LEDs High Density 2-step MacAdam, 50000h L95 B10 (Ta 25°C)
<b>MATERIAL</b>	body in die-cast aluminum, lens in black-serigraphed, tempered, transparent extra-clear glass
<b>POWER SUPPLY UNIT</b>	built in
<b>NOTES</b>	Honeycomb Louvre <b>NOT</b> available with wall grazing + asymmetrical (WA), asymmetrical 28° + 57° (ZL) and wall grazing + wall grazing (WW) optics.



<b>POWER / POWER SUPPLY MODEL NO.</b>	17W 24VDC NT4900 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> 9 E White NT4900 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> 9 F Grey NT4900 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> 9 H Anthracite NT4900 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> 9 T Cor-ten NT4900 <span style="color: green;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> <span style="color: orange;">■</span> <span style="color: white;">■</span> <span style="color: grey;">■</span> 9 7 Primer
<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>CONTROL SYSTEM</b>	0 - on/off R - 1-10V
<b>HONEYCOMB LOUVRE</b>	0 - not present 1 - present
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	Z - asymmetrical 28° S - 12° M - 23° L - 57° W - wall grazing A - asymmetrical
<b>LUMEN OUTPUT AT SOURCE</b>	1646 lm (3000K, CRI 80)
<b>DELIVERED LUMEN OUTPUT</b>	1386 lm (3000K, 12°, CRI 80)
<b>NO. AND TYPE OF LED</b>	1 COB LED High Density 2-step MacAdam, 50000h L95 B10 (Ta 25°C)
<b>MATERIAL</b>	body in die-cast aluminum, lens in black-serigraphed, tempered, transparent extra-clear glass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>NOTES</b>	Honeycomb Louvre <b>NOT</b> available with asymmetrical 28° (Z), wall grazing (W) and asymmetrical (A) optics.




# INTONO


## PHOTOMETRIC DATA

### INTONO 1.1


S - 13° CRI 80

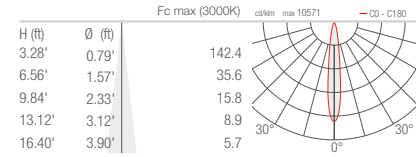

M - 22° CRI 80

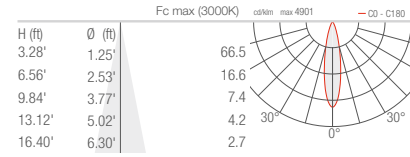


L - 33° CRI 80

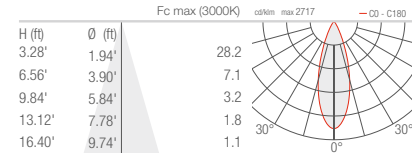


### INTONO 2.1


Z - Asymmetrical 8° CRI 80

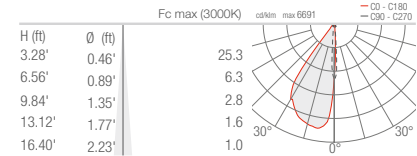


T - 11° CRI 80

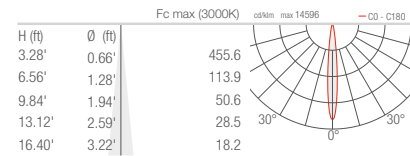


M - 34° CRI 80

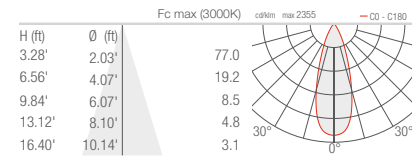

K - 68° CRI 80

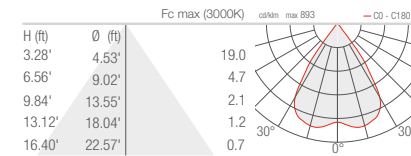


D - Diffuse CRI 80

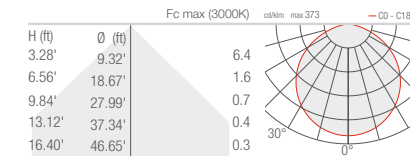


### INTONO 3.1


Z - Asymmetrical 11° CRI 80

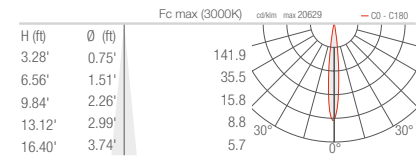


S - 15° CRI 80

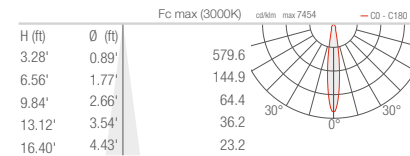


M - 20° CRI 80

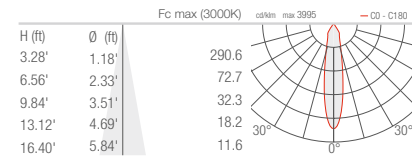


L - 43° CRI 80

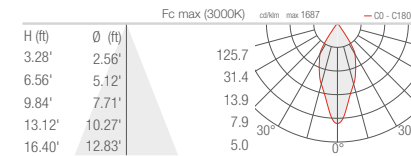

W - Wall grazing CRI 80

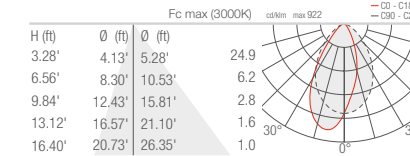


A - Asymmetrical CRI 80

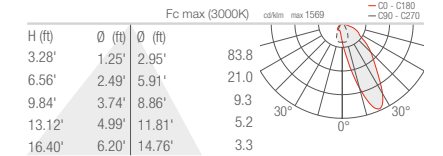


### INTONO 4.1


Z - Asymmetrical 28° CRI 80

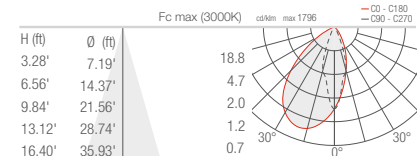


S - 12° CRI 80

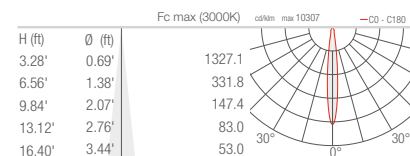


M - 23° CRI 80

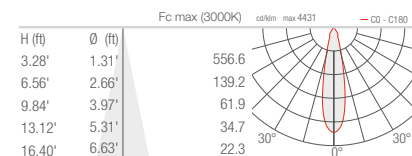


L - 57° CRI 80

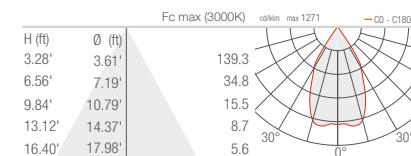

W - Wall grazing CRI 80

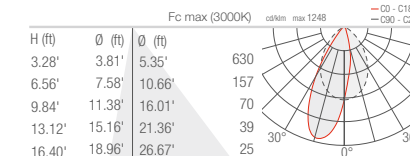

A - Asymmetrical CRI 80

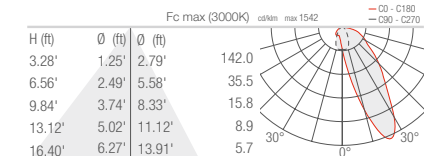



^  
INTONO 2.2  
Riflessioni Intono, Milano Design Week 2019

CONCEPT AND ART DIRECTION  
valentinicesarottiassociati

© L&L LUCE&LIGHT SRL, 2019  
ALL RIGHTS RESERVED

REV01/2019

designplan 



designplan<sup>TM</sup> 

The 'designplan' logo consists of the word 'designplan' in a white, outlined, sans-serif font. To the right of the text is a circular icon containing the letters 'dp' in a stylized, white, sans-serif font. The icon has a red-to-white gradient and a circular border.

79 Trenton Avenue  
Frenchtown, NJ 08825

Tel: (908) 996-7710  
Fax: (908) 996-7042