


Kora is a surface-mounted pendant for ceiling applications. Available with multiple interior and exterior finishes, along with various color temperatures and optics.



TECHNICAL DATA

Wattage / Input	3.5W (120VAC)
Power Supply	Integral Non-Dim
Construction	Body: Anticorodal Aluminum Ceiling Canopy: Steel Sheet Metal
CCT	2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	120 lm (3000K, 35°)
Efficacy	34.3 lm/W (3000K, 35°)
Optics	18°, 35°
Finishes	7 Standard, Custom RAL (see below)
Fixture Dimensions	Ø1.18" x 14.96" h
Fixture Weight	1.50 lbs
LED Source	1 Power LED
Lumen Maintenance	L90, B10 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN
Operating Temp.	-4°F to +113°F
IP Rating	IP40

Fixture Dimensions

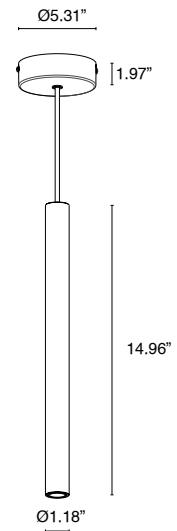

ORDERING INFORMATION

Example: KR101010FMC.

KR101010			
Model No.	CCT	Optics	Finish - Exterior (Interior)
KR101010	F - 2700K 5 - 3000K 9 - 4000K	S - 18° M - 35°	B - White (Silver Interior) C - Chrome (Silver Interior) N - Black (Golden Interior) 1 - Pure Orange (Golden Interior) 2 - Reseda Green (Silver Interior) 3 - Capri Blue (Silver Interior) 4 - Light Ivory (Silver Interior) CR - Custom RAL (Consult factory for "CR")

Job Name/Date:

Fixture Type Designation:

STANDARD FINISHES



White



Chrome



Black



Pure orange



Reseda green



Capri blue




Light ivory


PHOTOMETRIC DATA

Note all Photometry is 3000K

S - 18°

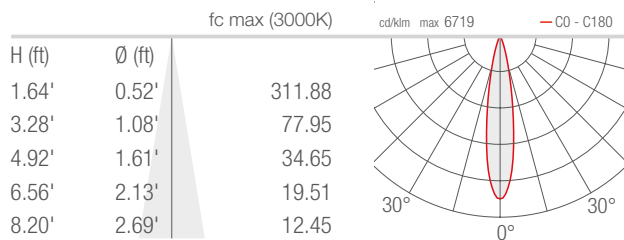

M - 35°

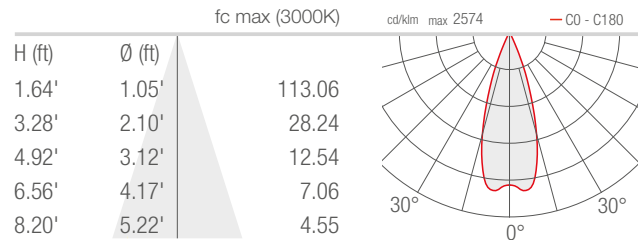

Job Name/Date:

Fixture Type Designation: