

KRILL

INDOOR PROJECTORS

INSTALLATION VERSATILITY. KRILL HAS A WIDE RANGE OF ACCESSORIES TO ENABLE IT TO EASILY REACH THE DETAILS THAT NEED EMPHASIZING: FIXING BASE, CEILING ROSE, FIXING SPRING, MAGNETIC PLATE AND ARM IN DIFFERENT LENGTHS.

THE ARM'S DOUBLE JOINT MEANS KRILL CAN BE ADJUSTED BY UP TO 180°.




designplan™ 



KRILL



FINISHES

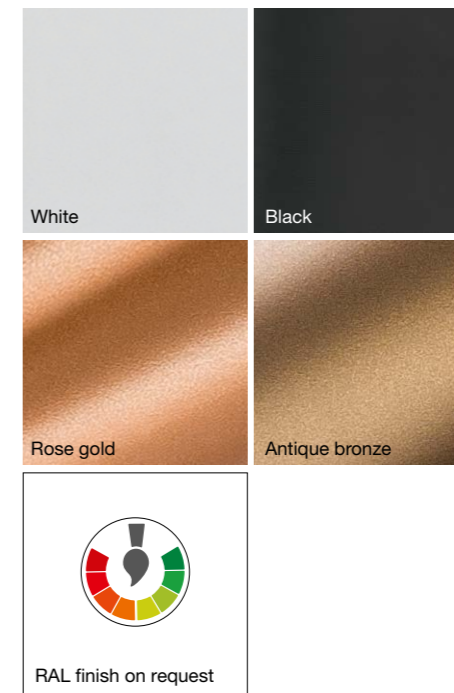

- < **KRILL 1.0**
3000K, 1W, 40°x26°
antique bronze
- KRILL 3.4**
3000K, 4.5W,
optical range 18°-80°
antique bronze / with rigid arm

KRILL

OPTICS

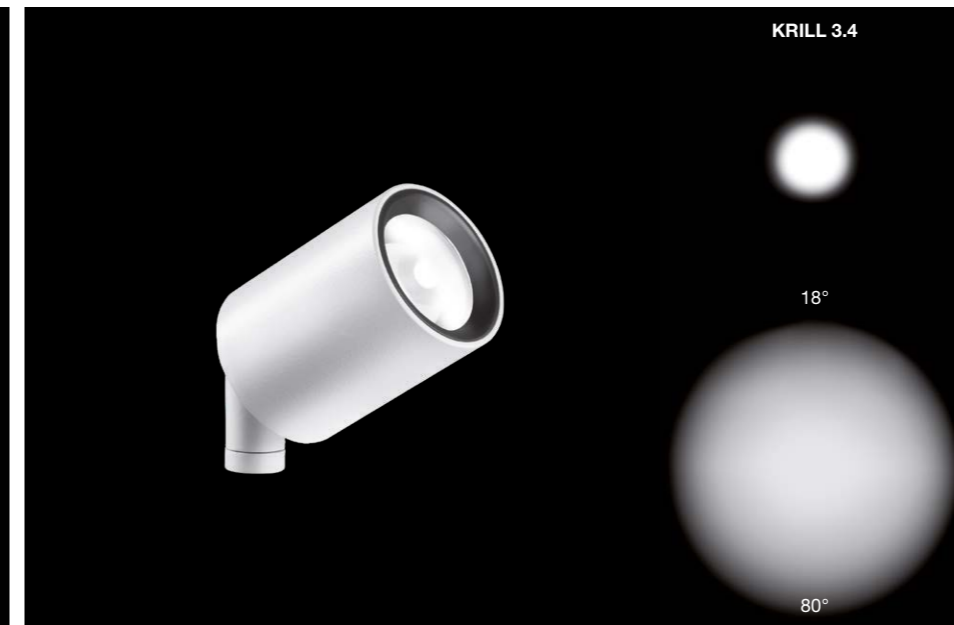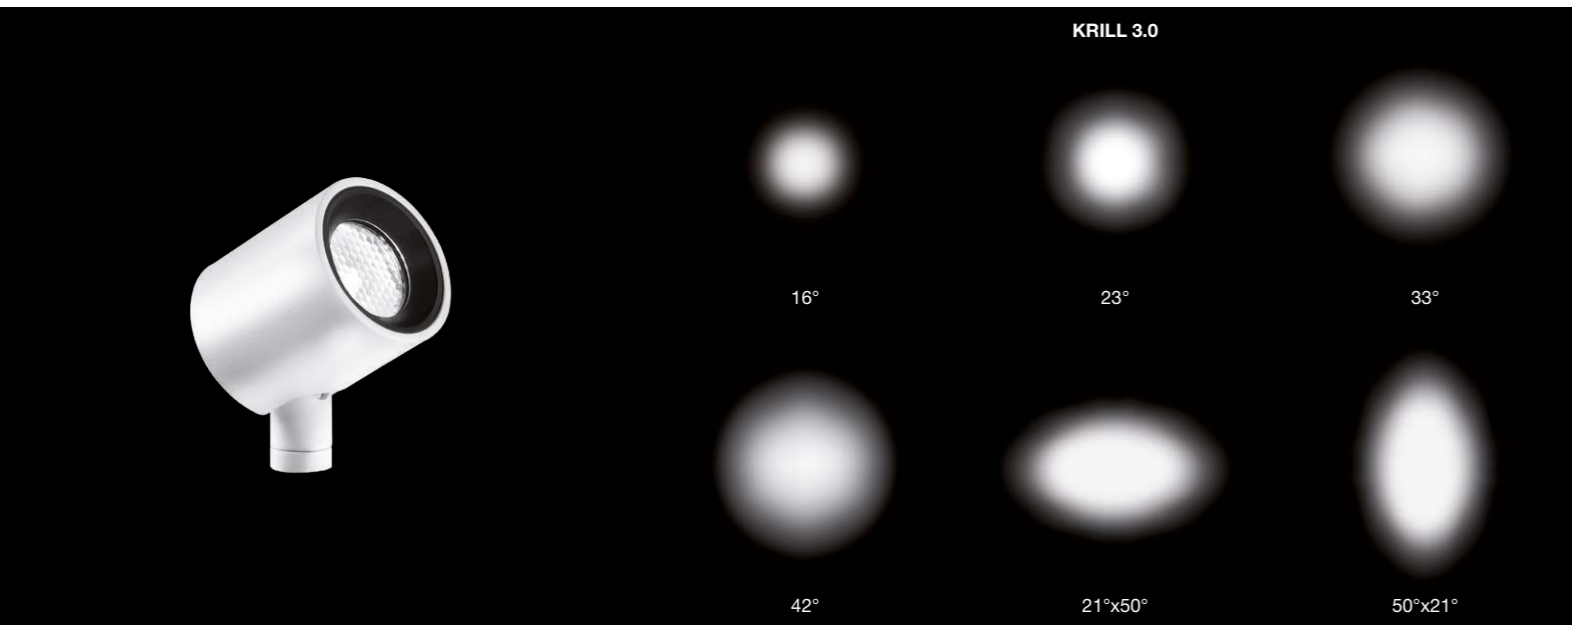


KRILL IS AVAILABLE WITH EITHER FIXED OPTICS OR A ZOOM LENS WITH WHICH THE ANGLE OF THE LIGHT BEAM CAN BE ADJUSTED AND ADAPTED AS THE OBJECTS ON DISPLAY CHANGE.



KRILL

2700K 3000K 4000K



Ø0.71"



KRILL 1.0
1W 350mA

Ø0.98"



KRILL 2.0
2.5W 700mA

Ø1.18"



KRILL 3.0
4.5W 350mA



KRILL 1.4
1W 350mA



KRILL 2.4
2.5W 700mA




KRILL 3.4
4.5W 350mA



^
KRILL 3.0
3000K, 4.5W, 23°,
black with ceiling rose

KRILL



26°x40° optics
(Krill 1.0)



40°x26° optics
(Krill 1.0)

KRILL 1.0



Required installation accessories, not included



KRILL 1.4



Required installation accessories, not included



23°x50° optics
(Krill 2.0)



50°x23° optics
(Krill 2.0)

KRILL 2.0



Required installation accessories, not included



KRILL 2.4



Required installation accessories, not included




MODEL NO.	1W 350mA KI10201000 ■ O ■ E White KI10201000 ■ O ■ N Black KI10201000 ■ O ■ Y Rose gold KI10201000 ■ O ■ Z Antique bronze
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	M - 23° L - 36° J - 48° W - 26°x40° X - 40°x26°
LUMEN OUTPUT AT SOURCE	105 lm (3000K, 350mA)
DELIVERED LUMEN OUTPUT	51 lm (3000K, 350mA, 36°)
NO. AND TYPE OF LED	1 power LED 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
FEATURES	CRI >90


MODEL NO.	1W 350mA KI14201000 ■ R1 ■ E White KI14201000 ■ R1 ■ N Black KI14201000 ■ R1 ■ Y Rose gold KI14201000 ■ R1 ■ Z Antique bronze
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	optical range 22°-64°
LUMEN OUTPUT AT SOURCE	105 lm (3000K, 350mA)
DELIVERED LUMEN OUTPUT	60 lm (3000K, 350mA, 64°)
NO. AND TYPE OF LED	1 power LED 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
FEATURES	CRI >90

MODEL NO.	2.5W 700mA KI20201000 ■ O ■ E White KI20201000 ■ O ■ N Black KI20201000 ■ O ■ Y Rose gold KI20201000 ■ O ■ Z Antique bronze
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 17° M - 25° L - 33° W - 23°x50° X - 50°x23°
LUMEN OUTPUT AT SOURCE	202 lm (3000K, 700mA)
DELIVERED LUMEN OUTPUT	150 lm (3000K, 700mA, 17°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)
FEATURES	CRI >90

MODEL NO.	2.5W 700mA KI24201000 ■ R1 ■ E White KI24201000 ■ R1 ■ N Black KI24201000 ■ R1 ■ Y Rose gold KI24201000 ■ R1 ■ Z Antique bronze
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	optical range 9°-70°
LUMEN OUTPUT AT SOURCE	202 lm (3000K, 700mA)
DELIVERED LUMEN OUTPUT	176 lm (3000K, 700mA, 70°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)
FEATURES	CRI >90



21°x50° optics
(Krill 3.0)



50°x21° optics
(Krill 3.0)

KRILL 3.0



Required installation accessories, not included



MODEL NO.	4.5W 350mA KI30201000 0 E White KI30201000 0 N Black KI30201000 0 Y Rose gold KI30201000 0 Z Antique bronze
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 16° M - 23° L - 33° K - 42° W - 21°x50° X - 50°x21°
LUMEN OUTPUT AT SOURCE	452 lm (3000K, 350mA)
DELIVERED LUMEN OUTPUT	281 lm (3000K, 350mA, 23°)
NO. AND TYPE OF LED	1 high intensity power LED 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
FEATURES	CRI >90

KRILL 3.4



Required installation accessories, not included



MODEL NO.	4.5W 350mA KI34201000 R1 E White KI34201000 R1 N Black KI34201000 R1 Y Rose gold KI34201000 R1 Z Antique bronze
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	optical range 18°-80°
LUMEN OUTPUT AT SOURCE	452 lm (3000K, 350mA)
DELIVERED LUMEN OUTPUT	253 lm (3000K, 350mA, 80°)
NO. AND TYPE OF LED	1 high intensity power LED 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
FEATURES	CRI >90



^
KRILL 2.4
3000K, 2.5W
optical range 9°-70°
rose gold
with magnetic plate


KRILL

ACCESSORIES


ANTI-GLARE ACCESSORIES



WHK120A0 (Krill 2.0)
WHK130A0 (Krill 3.0)
 Honeycomb louvre



WBA00E - White
WBA00N - Black
WBA00Y - Rose gold
WBA00Z - Antique bronze
 Standard snoot
 (Krill 2.0)



WBA01E - White
WBA01N - Black
WBA01Y - Rose gold
WBA01Z - Antique bronze
 Standard snoot
 (Krill 3.0)

ACCESSORIES FOR INSTALLATION

Required installation accessories, not included



WDA00E - White
WDA00N - Black
WDA00Y - Rose gold
WDA00Z - Antique bronze
 Fixing base



WDA04E - White
WDA04N - Black
WDA04Y - Rose gold
WDA04Z - Antique bronze
 Magnetic plate



WDA03E - White
WDA03N - Black
WDA03Y - Rose gold
WDA03Z - Antique bronze
 Ceiling Canopy




WGA08E - White
WGA08N - Black
WGA08Y - Rose gold
WGA08Z - Antique bronze
 Fixing spring



h 5.91"
WDA01E - White
WDA01N - Black
WDA01Y - Rose gold
WDA01Z - Antique bronze
 Rigid arm
 order together with
 the fixing base or the nipple



WGA01
 Nipple coupler

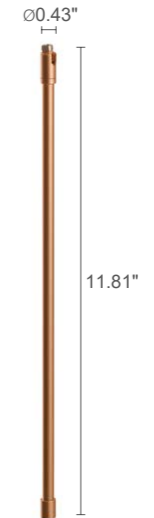

h 11.81"
WDA02E - White
WDA02N - Black
WDA02Y - Rose gold
WDA02Z - Antique bronze
 Rigid arm
 order together with
 the fixing base or the nipple

POWER CABLES

PVC cable
 HT105° 2x0.01" Ø0.12"
 your choice of length

WF0600

order together with the lighting fixture