

KRILL

INDOOR PROJECTORS

INSTALLATION VERSATILITY. KRILL HAS A WIDE RANGE OF ACCESSORIES TO ENABLE IT TO EASILY REACH THE DETAILS THAT NEED EMPHASIZING: FIXING BASE, CEILING ROSE, FIXING SPRING, MAGNETIC PLATE AND ARM IN DIFFERENT LENGTHS.

THE ARM'S DOUBLE JOINT MEANS KRILL CAN BE ADJUSTED BY UP TO 180°.





designplan® 



KRILL



FINISHES

 White	 Black
 Rose gold	 Antique bronze
 RAL finish on request	

< **KRILL 1.0**
3000K, 1W, 40°x26°
antique bronze
KRILL 3.4
3000K, 4.5W,
optical range 18°–80°
antique bronze / with rigid arm

KRILL

OPTICS

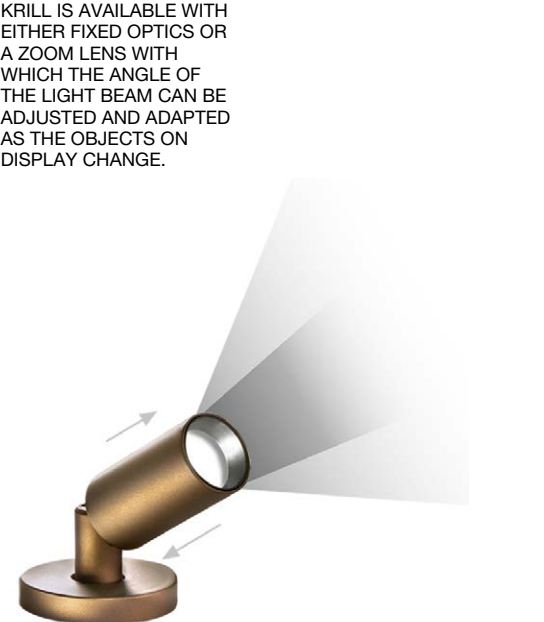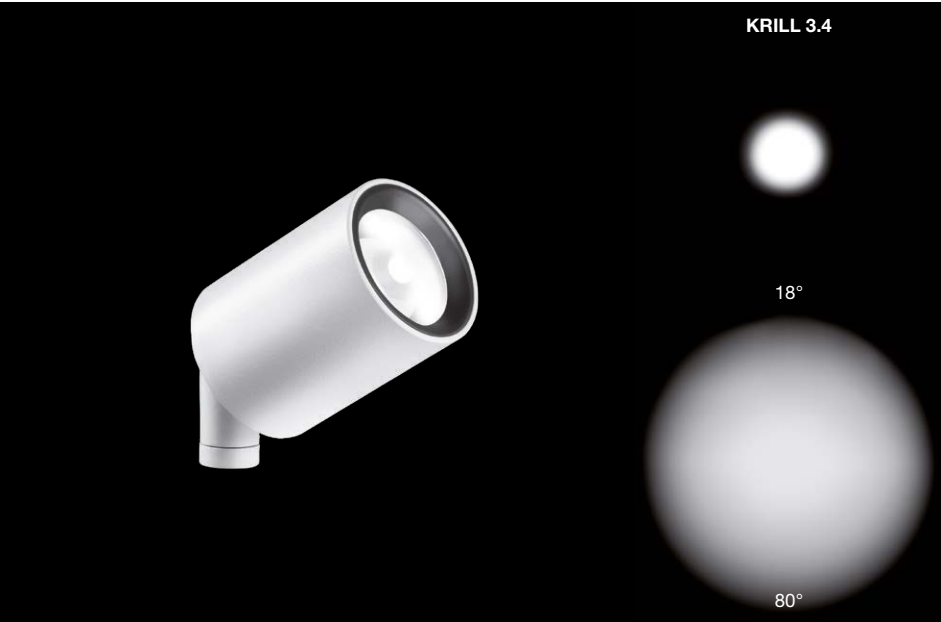

KRILL

2700K 3000K 4000K



Ø0.71"



KRILL 1.0
1W 350mA

Ø0.98"



KRILL 2.0
2.5W 700mA

Ø1.18"



KRILL 3.0
4.5W 350mA



KRILL 1.4
1W 350mA



KRILL 2.4
2.5W 700mA




KRILL 3.4
4.5W 350mA



^
KRILL 3.0
3000K, 4.5W, 23°,
black with ceiling rose



KRILL



26°x40° optics
(Krill 1.0)



40°x26° optics
(Krill 1.0)

KRILL 1.0



Required installation accessories, not included



MODEL NO.	1W 350mA
	KI10201000 0 E White
	KI10201000 0 N Black
	KI10201000 0 Y Rose gold
	KI10201000 0 Z Antique bronze
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	M - 23° L - 36° J - 48° W - 26°x40° X - 40°x26°
LUMEN OUTPUT AT SOURCE	105 lm (3000K, 350mA)
DELIVERED LUMEN OUTPUT	51 lm (3000K, 350mA, 36°)
NO. AND TYPE OF LED	1 power LED 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
FEATURES	CRI >90


KRILL 1.4



Required installation accessories, not included



MODEL NO.	1W 350mA
	KI14201000 R1 E White
	KI14201000 R1 N Black
	KI14201000 R1 Y Rose gold
	KI14201000 R1 Z Antique bronze
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	optical range 22°–64°
LUMEN OUTPUT AT SOURCE	105 lm (3000K, 350mA)
DELIVERED LUMEN OUTPUT	60 lm (3000K, 350mA, 64°)
NO. AND TYPE OF LED	1 power LED 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
FEATURES	CRI >90



23°x50° optics
(Krill 2.0)



50°x23° optics
(Krill 2.0)

KRILL 2.0



Required installation accessories, not included



MODEL NO.	2.5W 700mA
	KI20201000 0 E White
	KI20201000 0 N Black
	KI20201000 0 Y Rose gold
	KI20201000 0 Z Antique bronze
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 17° M - 25° L - 33° W - 23°x50° X - 50°x23°
LUMEN OUTPUT AT SOURCE	202 lm (3000K, 700mA)
DELIVERED LUMEN OUTPUT	150 lm (3000K, 700mA, 17°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)
FEATURES	CRI >90


KRILL 2.4




Required installation accessories, not included



MODEL NO.	2.5W 700mA
	KI24201000 R1 E White
	KI24201000 R1 N Black
	KI24201000 R1 Y Rose gold
	KI24201000 R1 Z Antique bronze
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	optical range 9°–70°
LUMEN OUTPUT AT SOURCE	202 lm (3000K, 700mA)
DELIVERED LUMEN OUTPUT	176 lm (3000K, 700mA, 70°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)
FEATURES	CRI >90



21°x50° optics
(Krill 3.0)



50°x21° optics
(Krill 3.0)

KRILL 3.0



Required installation accessories, not included



MODEL NO.	4.5W 350mA KI30201000 0 E White KI30201000 0 N Black KI30201000 0 Y Rose gold KI30201000 0 Z Antique bronze
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 16° M - 23° L - 33° K - 42° W - 21°x50° X - 50°x21°
LUMEN OUTPUT AT SOURCE	452 lm (3000K, 350mA)
DELIVERED LUMEN OUTPUT	281 lm (3000K, 350mA, 23°)
NO. AND TYPE OF LED	1 high intensity power LED 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
FEATURES	CRI >90

KRILL 3.4



Required installation accessories, not included



MODEL NO.	4.5W 350mA KI34201000 R1 E White KI34201000 R1 N Black KI34201000 R1 Y Rose gold KI34201000 R1 Z Antique bronze
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	optical range 18°–80°
LUMEN OUTPUT AT SOURCE	452 lm (3000K, 350mA)
DELIVERED LUMEN OUTPUT	253 lm (3000K, 350mA, 80°)
NO. AND TYPE OF LED	1 high intensity power LED 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
FEATURES	CRI >90



^
KRILL 2.4
3000K, 2.5W
optical range 9°–70°
rose gold
with magnetic plate




KRILL

ACCESSORIES


ANTI-GLARE ACCESSORIES



WHK120A0 (Krill 2.0)
WHK130A0 (Krill 3.0)
Honeycomb louvre



WBA00E - White
WBA00N - Black
WBA00Y - Rose gold
WBA00Z - Antique bronze
Standard snoot
(Krill 2.0)



WBA01E - White
WBA01N - Black
WBA01Y - Rose gold
WBA01Z - Antique bronze
Standard snoot
(Krill 3.0)

ACCESSORIES FOR INSTALLATION


Required installation accessories, not included



WDA00E - White
WDA00N - Black
WDA00Y - Rose gold
WDA00Z - Antique bronze
Fixing base




WDA03E - White
WDA03N - Black
WDA03Y - Rose gold
WDA03Z - Antique bronze
Ceiling Canopy



WGA08E - White
WGA08N - Black
WGA08Y - Rose gold
WGA08Z - Antique bronze
Fixing spring



h 5.91"
WDA01E - White
WDA01N - Black
WDA01Y - Rose gold
WDA01Z - Antique bronze
Rigid arm
order together with
the fixing base or the nipple



h 11.81"
WDA02E - White
WDA02N - Black
WDA02Y - Rose gold
WDA02Z - Antique bronze
Rigid arm
order together with
the fixing base or the nipple



WGA01
Nipple coupler

POWER CABLES

PVC cable
HT105° 2x0.01" Ø0.12"
your choice of length
WF0600
order together with the lighting fixture