

#### Technical features

IP66 IK08

DMX **NEW**



101805P-06P-07P-08P

## LIGHTBEAM RGBW / TUNABLE WHITE


Projector for outdoor installation. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. With 18 to 60 OSRAM RGBW LED, available with 120-277VAC integral driver, DMX interface. IP66 rating.

#### Technical data

|              |                                                              |
|--------------|--------------------------------------------------------------|
| IP Rating    | IP66                                                         |
| IK Rating    | IK08                                                         |
| Material     | High corrosion resistance die-cast copper-free aluminum body |
| Coating      | Polyester powder coating with phosphochromating pre-finish   |
| Light source | OSRAM OSOLON SSL 80 LED                                      |
| Screws       | Stainless steel                                              |
| Transformer  | Integral 120-277VAC, DMX Interface                           |
| Gasket       | Silicone rubber                                              |
| Glass        | Tempered                                                     |
| Power cable  | 3.28' power cable included                                   |

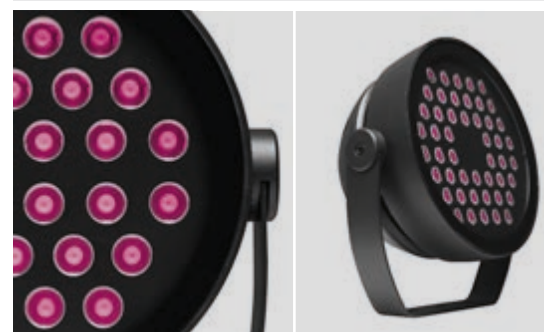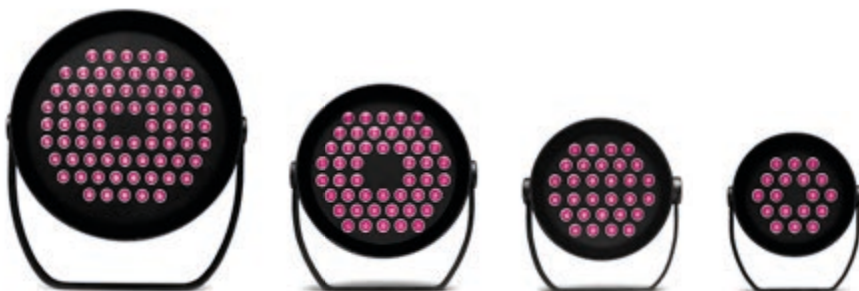

| 101805P              |                                              | LIGHTBEAM-18 RGBW |
|----------------------|----------------------------------------------|-------------------|
| light source         | light beam options                           | lumen output (lm) |
| <b>RGBW</b>          |                                              |                   |
| high-power led       | 8° / 15° / 30° / 45° / 60° / 15x60° / 20x40° | 2,206             |
| <b>Tunable white</b> |                                              |                   |
| high-power led       | 8° / 15° / 30° / 45° / 60° / 15x60° / 20x40° | 2,758             |



#### Technical data


Wattage 36 WATT

Light source NR. 18 OSRAM LED

Gross weight 5.73 lbs



| 101806P              |                                              | LIGHTBEAM-30 RGBW |
|----------------------|----------------------------------------------|-------------------|
| light source         | light beam options                           | lumen output (lm) |
| <b>RGBW</b>          |                                              |                   |
| high-power led       | 8° / 15° / 30° / 45° / 60° / 15x60° / 20x40° | 3,989             |
| <b>Tunable white</b> |                                              |                   |
| high-power led       | 8° / 15° / 30° / 45° / 60° / 15x60° / 20x40° | 4,986             |




#### Technical data


Wattage 60 WATT

Light source NR. 30 OSRAM LED

Gross weight 11.46 lbs



| 101807P              |                                              | LIGHTBEAM-48 RGBW |
|----------------------|----------------------------------------------|-------------------|
| light source         | light beam options                           | lumen output (lm) |
| <b>RGBW</b>          |                                              |                   |
| high-power led       | 8° / 15° / 30° / 45° / 60° / 15x60° / 20x40° | 5,124             |
| <b>Tunable white</b> |                                              |                   |
| high-power led       | 8° / 15° / 30° / 45° / 60° / 15x60° / 20x40° | 6,405             |



#### Technical data


Wattage 100 WATT

Light source NR. 48 OSRAM LED

Gross weight 16.09 lbs



| 101808P              |                                              | LIGHTBEAM-60 RGBW |
|----------------------|----------------------------------------------|-------------------|
| light source         | light beam options                           | lumen output (lm) |
| <b>RGBW</b>          |                                              |                   |
| high-power led       | 8° / 15° / 30° / 45° / 60° / 15x60° / 20x40° | 9,906             |
| <b>Tunable white</b> |                                              |                   |
| high-power led       | 8° / 15° / 30° / 45° / 60° / 15x60° / 20x40° | 12,383            |

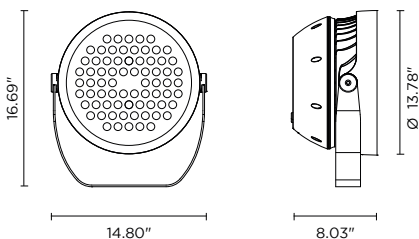

#### Technical data

Wattage 150 WATT

Light source NR. 60 OSRAM LED

Gross weight 29.76 lbs

