

Technical features

IP 66 IK 08

NEW

101801P-02P-03P-04P

LIGHTBEAM


Projector for outdoor installation. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. With 18 to 60 OSRAM LED, available as 120-277VAC power supply. IP66 rating.

Technical data

IP Rating	IP66
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish - Black
Light source	OSRAM OSOLON SSL 80 LED
Screws	Stainless steel
Transformer	Integral 120-277VAC
Gasket	Silicone rubber
Glass	Tempered
Power cable	3.28' power cable included




101801P		LIGHTBEAM-18
light source	light beam options	lumen output (lm)
<b>3000°K warm-white</b>		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	2,702
<b>4000°K neutral-white</b>		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	2,758

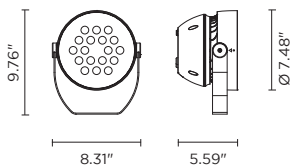

Technical data	
Wattage	36 WATT
Light source	NR. 18 OSRAM LED
Gross weight	5.73 lbs




101802P		LIGHTBEAM-30
light source	light beam options	lumen output (lm)
<b>3000°K warm-white</b>		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	4,887
<b>4000°K neutral-white</b>		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	4,986

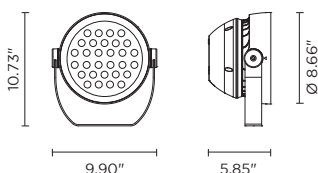

Technical data	
Wattage	60 WATT
Light source	NR. 30 OSRAM LED
Gross weight	11.46 lbs




101803P		LIGHTBEAM-48
light source	light beam options	lumen output (lm)
<b>3000°K warm-white</b>		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	6,277
<b>4000°K neutral-white</b>		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	6,405

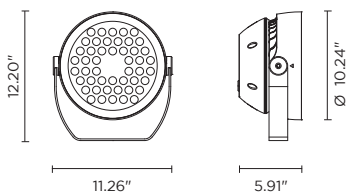

Technical data	
Wattage	100 WATT
Light source	NR. 48 OSRAM LED
Gross weight	16.09 lbs



101804P		LIGHTBEAM-60
light source	light beam options	lumen output (lm)
<b>3000°K warm-white</b>		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	12,135
<b>4000°K neutral-white</b>		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	12,383

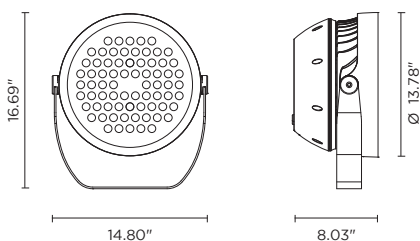

Technical data	
Wattage	150 WATT
Light source	NR. 60 OSRAM LED
Gross weight	29.76 lbs

