

Technical features




Technical data

Wattage	19.5W
IP Rating	IP67
IK Rating	IK10
Material	High corrosion resistance extruded copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 13 x 1.5W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double PG13.5
Power cable	3.28' neoprene power cable included
Gross weight	9.48 lbs

403003P

LINE-B 13

Linear luminaire for outdoor installation on a façade/wall, length 24.02" Phosphochromatised and polyester powder coated extruded copper-free aluminum body, tempered safety glass, moulded silicone gasket and 120-277VAC 50-60Hz, with 13 CREE XP-G3 LED. IP67 rating.

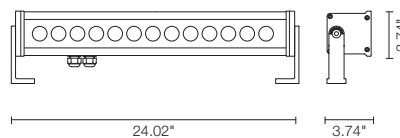


light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	1,872	96.00
high-power led	30°	1,779	91.25
high-power led	45°	1,690	86.67
4000°K neutral-white			
high-power led	10°	1,950	100.00
high-power led	30°	1,853	95.00
high-power led	45°	1,760	90.25

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)

STANDARD BRACKET (INCLUDED)



AC003: Extensible brackets for line-b die-cast aluminum (option to be ordered separately)

