

LINE B 13


Line B 13 is a 24.0" linear profile surface-mounted uplight for outdoor installation. It is offered in 2 color temperatures, 3 optics and 3 finish options.



TECHNICAL DATA

Wattage / Input	19.5W (120VAC)
Power Supply	Integral
Construction	Body/Base: High Corrosion Resistance, Extruded Copper-free Aluminum Coating: Polyester Powder Coating with Phosphochromating Pre-finish Cable Length: 3.28'
CCT	3000K, 4000K
CRI	-
Delivered Lumens	1779 lm (3000K, 30°)
Efficacy	91.2 lm/W (3000K, 30°)
Optics	10°, 30°, 45°
Finishes	Textured Gray, Anthracite Gray, Matte Black
Fixture Dimensions	24.02" l x 3.74" w x 3.74" h
Fixture Weight	9.48 lbs
LED Source	13 CREE XP-G3 LED
Operating Temp.	-
IP Rating	IP67
Impact Rating	IK10



Fixture Dimensions

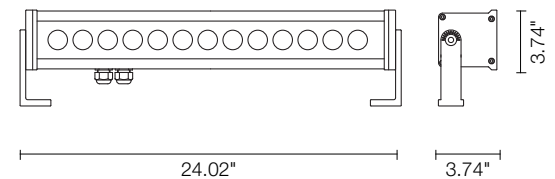

STANDARD BRACKET (INCLUDED)



AC003: Extensible brackets for line-b die-cast aluminum (option to be ordered separately)

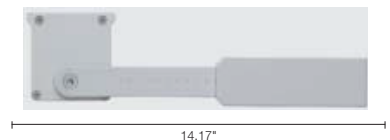

ORDERING INFORMATION

Example: 403003P-30K-45-TG.


403003P	-		-		-	
Model No.	CCT	Optics	Finish			
403003P	30K - 3000K 40K - 4000K	10 - 10° 30 - 30° 45 - 45°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black			

Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Maximum Candela = 58078

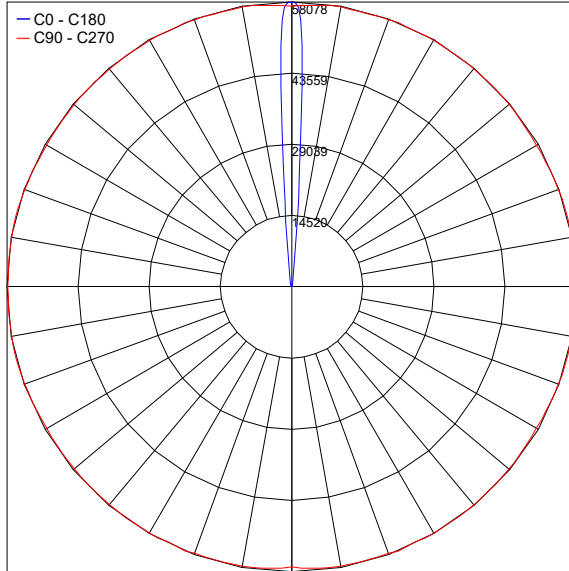

PHOTOMETRIC FILENAME : LINE B 13 4030003 [10° 3000K].IES

Maximum Candela = 5777

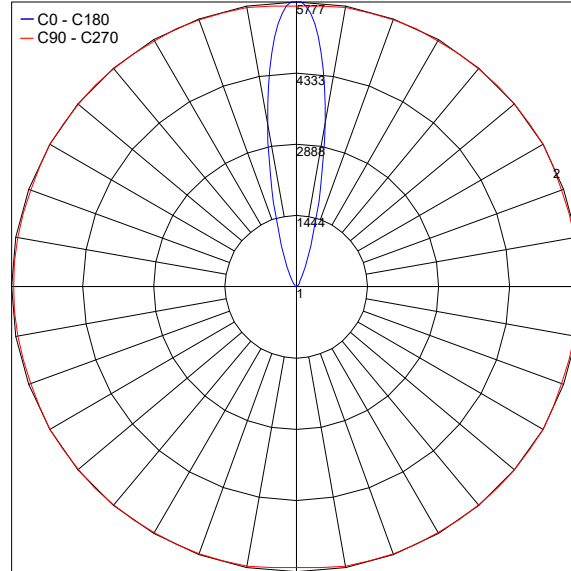

PHOTOMETRIC FILENAME : LINE B 13 4030003 [30° 3000K].IES

Job Name/Date:

Fixture Type Designation: