

Technical features




Technical data

Wattage	31.5W
IP Rating	IP67
IK Rating	IK10
Material	High corrosion resistance extruded copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 21 x 1.5W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double PG13.5
Power cable	3.28' neoprene power cable included
Gross weight	14.33 lbs

403004P

LINE-B 21

Linear luminaire for outdoor installation on a façade/wall, length 35.8". Phosphochromatised and polyester powder coated extruded copper-free aluminum body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 21 CREE XP-G3 LED. IP67 rating.

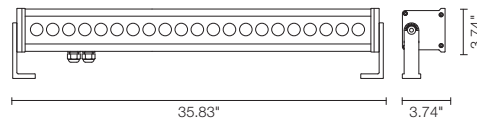

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	3,024	96.00
high-power led	30°	2,873	91.25
high-power led	45°	2,729	86.67
4000°K neutral-white			
high-power led	10°	3,150	100.00
high-power led	30°	2,993	95.00
high-power led	45°	2,843	90.25

Finish color options:



STANDARD BRACKET (INCLUDED)



AC003: Extensible brackets for line-b die-cast aluminum (option to be ordered separately)

