

LIRA 1.0
3000K, 6W, gray



designplan™ 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com


Tel: (908) 996-7710
Fax: (908) 996-7042

LIRA


OUTDOOR STEP LIGHTS
LIGHTING FOR PATHS AND STEPS



LIRA 1.0

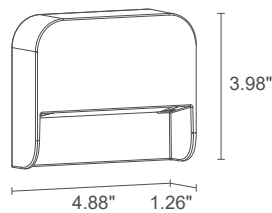

LIRA 2.0

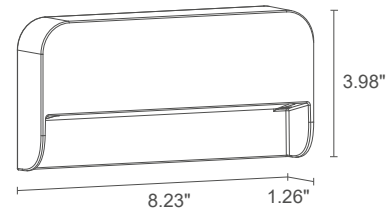

1.2 lbs IP65 IK08

POWER / POWER SUPPLY	6W 24VDC
MODEL NO.	LR1010 A E White LR1010 A F Gray LR1010 A H Anthracite LR1010 A T Cor-ten
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	asymmetrical
LUMEN OUTPUT AT SOURCE	756 lm (3000K)
DELIVERED LUMEN OUTPUT	368 lm (3000K, white finish)
NO. AND TYPE OF LED	18 mid-power LEDs 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in serigraphed extra-clear microprismatic glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 4.92' neoprene cable H05RN-F 0.12"x0.04" Ø0.28"
MOUNTING	surface mounted (wall)
ACCESSORIES	see accessories page

1.9 lbs IP65 IK08



POWER / POWER SUPPLY	12W 24VDC
MODEL NO.	LR2010 A E White LR2010 A F Gray LR2010 A H Anthracite LR2010 A T Cor-ten
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	asymmetrical
LUMEN OUTPUT AT SOURCE	1512 lm (3000K)
DELIVERED LUMEN OUTPUT	736 lm (3000K, white finish)
NO. AND TYPE OF LED	36 mid-power LEDs 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in serigraphed extra-clear microprismatic glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 4.92' neoprene cable H05RN-F 0.12"x0.04" Ø0.28"
MOUNTING	surface mounted (wall)
ACCESSORIES	see accessories page

LIRA

POSITIONING DIAGRAMS



LIRA 1.0

A - Asymmetrical

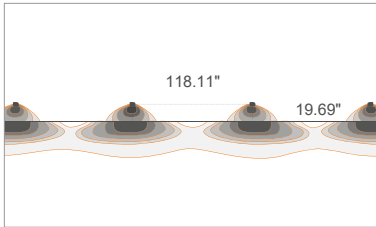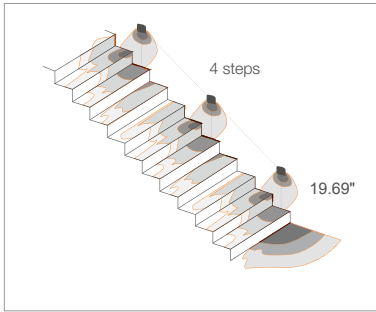

LIRA 2.0

A - Asymmetrical

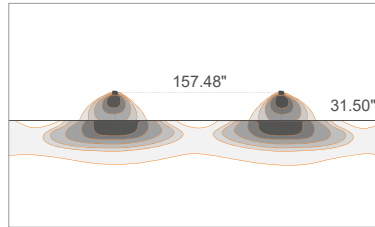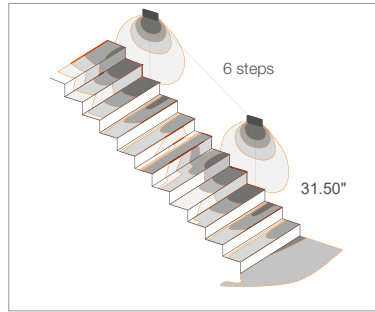

LIRA 1.0
3000K, 6W, anthracite


Project by / Corinne Vezzoni & Associés
Light planning by / 8' 18"
thecamp, Aix-en-Provence, France



LIRA

OUTDOOR STEP LIGHTS PHOTOMETRICS

LIRA 1.0

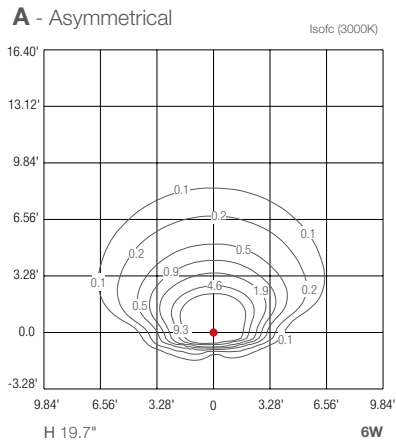

LIRA 2.0

