

NANO IP54

OUTDOOR

Fix (not adjustable) 0° - 0°

2.80" × 5.43"

Material : waterproof CALCYT+®

NANO LED DIM 100 LM


REF N° 151 60 505 CRI 80 warm white 2200°K

REF N° 151 60 005 CRI 90 warm white 2700°K

REF N° 151 60 105 CRI 90 warm white 3000°K

REF N° 151 60 205 CRI 90 neutral white 4000°K

REF N° 151 60 305 royal blue

1W - excl. LED driver - current
controlled 350mA - 

Ⓟ - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350mA

NANO LED DIM 200 LM


REF N° 151 62 505 CRI 80 warm white 2200°K

REF N° 151 62 005 CRI 90 warm white 2700°K

REF N° 151 62 105 CRI 90 warm white 3000°K

REF N° 151 62 205 CRI 90 neutral white 4000°K

REF N° 151 62 305 royal blue

2W - excl. LED driver - current
controlled 350mA - 

Ⓟ - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350mA

NANO LED DIM 400 LM


REF N° 151 61 505 CRI 80 warm white 2200°K

REF N° 151 61 005 CRI 90 warm white 2700°K


REF N° 151 61 105 CRI 90 warm white 3000°K

REF N° 151 61 205 CRI 90 neutral white 4000°K

REF N° 151 61 305 royal blue

4W - excl. LED driver - current
controlled 350mA - 

Ⓟ - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350mA

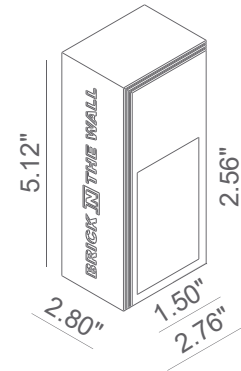

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT NANO

REF N° 751 01 000 For mounting into gypsum walls
Housing: perforated aluminium