



NEW PRODUCTS

4th Quarter - 2020



79 Trenton Avenue • Frenchtown, NJ 08825
ph. 908-996-7710 f. 908-996-7042
www.designplan.com



COMBINA D

Interchangeable Indoor Recessed Downlights for Showrooms, Offices and Retail



Configure to meet your exact requirements

- 4 Sizes
- 2 Bodies
- 4 Retaining Bezels
- 6 Covers
- Various Optics
- 4 Optical Accessories



Fixed Versions

COMBINA D 1.0

COMBINA D 2.0

COMBINA D 3.0

COMBINA D 4.0



Adjustable Versions

COMBINA D 1.1

COMBINA D 2.1

COMBINA D 3.1

COMBINA D 4.1





DUOMO

Adjustable Indoor Floodlights
created for Architectural Lighting
of Archways, Aisles
and Large Spaces



DUOMO 2.0

6.14" l x 1.97" w x 10.24 h
19W, Integral, 1428 lm, IP54



DUOMO 3.0

8.11" l x 1.97" w x 10.24 h
28W, Integral, 2142 lm, IP54



DUOMO 4.0

15.59" l x 1.97" w x 10.24 h
56W, Integral, 4284 lm, IP54



NEVA 3 AND NEVA 4

Integral Driver Versions added to the Neva Family of Linear Profiles for Architectural Lighting



NEVA 3.0

NEVA 3.1

NEVA 3.2

Surface Mounted OR

Recessed Mounted

24" length version - 23W

36" length version - 39W

60" length version - 64W

IP65, IP67

NEVA 4.0

NEVA 4.1

NEVA 4.2

Surface Mounted OR

Recessed Mounted

27" length version - 16W

41" length version - 24W

69" length version - 40W

IP65, IP67





ZIA

Round Indoor Wall Mount

In Static White,
Tunable White or RGBW
Ø8.3", Integral, 13-15W, IP65

*Ring can be painted in
contrasting color for visual effect*




ZIO

Round Indoor Wall Mount

Static White,
Tunable White or RGBW
Ø8.3", Integral, 13-15W, IP65

*Ring can be painted in
contrasting color for visual effect*

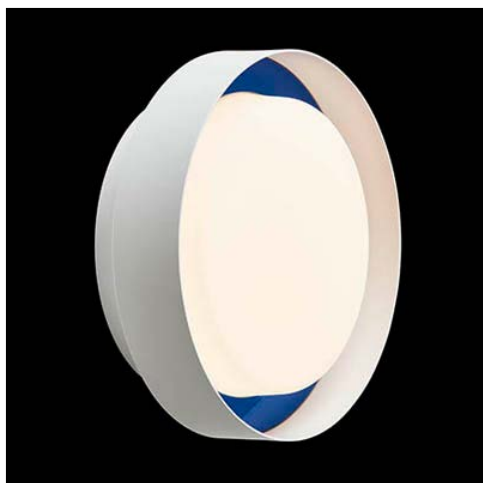

STIRRUP

Round Outdoor Bollard
for Use in Parks, Pedestrian Areas,
Gardens and Plazas

19.7" height - 14W
35.4" height - 24W
IP66, IK10





LSW

Vandal Resistant Recessed
or Surface Mounted Linear
Low Voltage Slot



Suitable for Steam Rooms
Static or Tunable White,
8.1W per foot (static)
6.3W per foot (tunable)
1 foot, 4 foot versions,
Remote Driver
IP65





*The frame cover hinges
down to access the LED
trays which are removeable
with quick disconnect.*



LSC

Continuous Run Version of LSW
Vandal Resistant, Recessed Mounted
Linear Low Voltage Slot


Suitable for Steam Rooms
Static or Tunable White,
8.1W per foot (static)
6.3W per foot (tunable)
4 foot version for continuous runs
Remote Driver
IP65

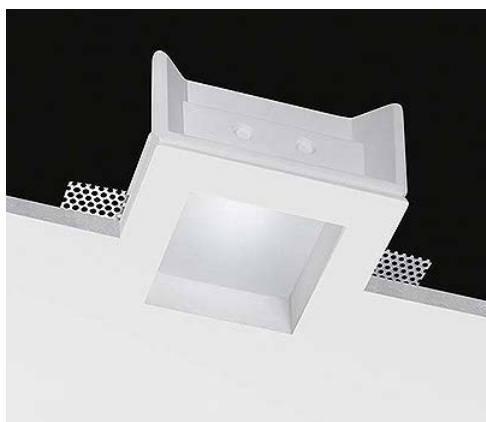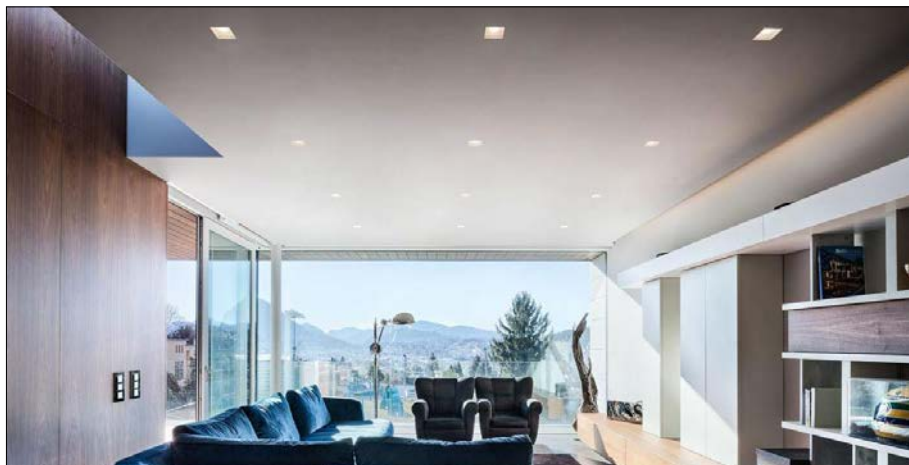

NEFI


Recessed Indoor Downlight,
AirCoral®, 5.7" x 5.7",
10W, 557 lm, IP40

p.u.k. Italian
Architectural
Lighting

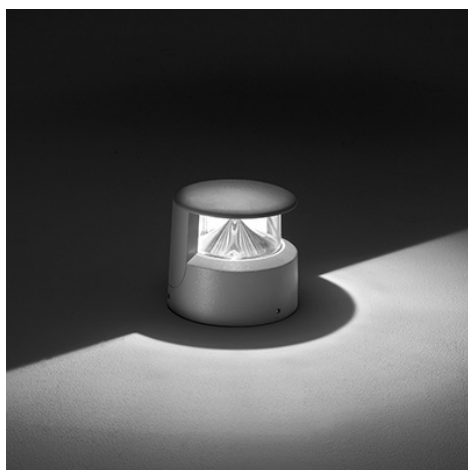

TRON 180

Round Low Height 180° Bollard
26W, 6.9" h, 1100 lm, IP66, IK10

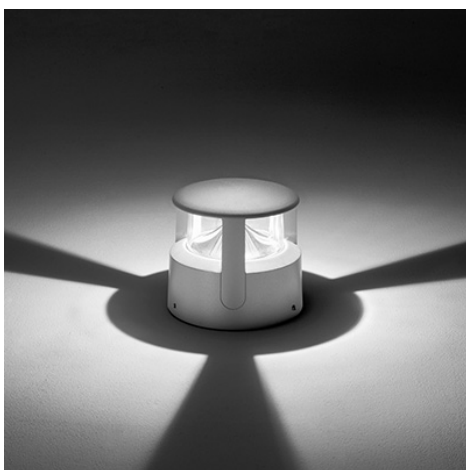

TRON 360

Round Low Height 360° Bollard
26W, 6.9" h, 2050 lm, IP66, IK10

diomede




ARIA

Outdoor Wall or Ceiling Mounted
Ø12.6", 13W, 1615 lm, IP65



MATITA

Outdoor Bollard
with Black or White
Reflector, 3 heights
13W, 565 lm, IP65

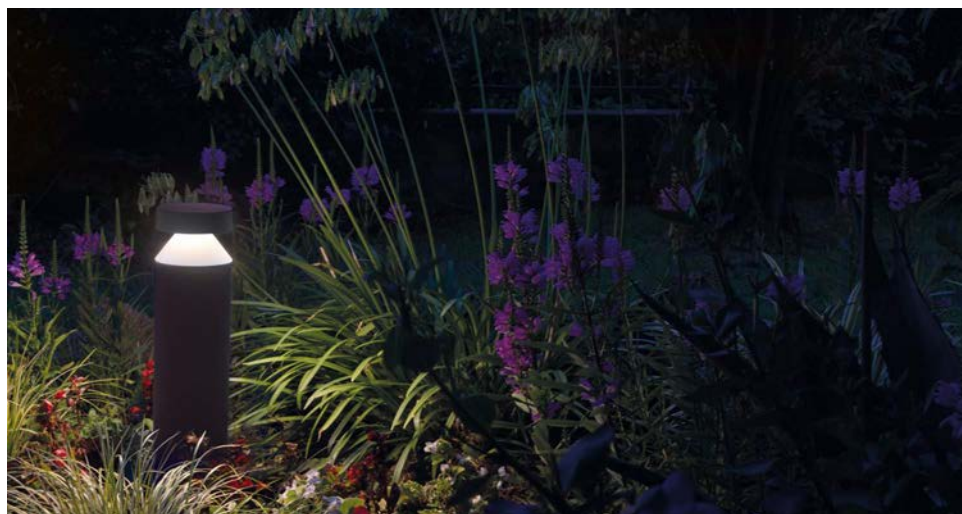


diomede



ELOISE

Round Indoor Surface Mount
with Black or White Reflector
Ø5.7", 13W, Integral, IP65

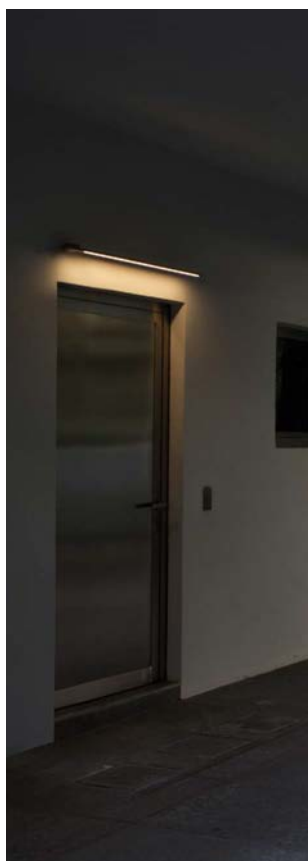

ROOT

Linear Surface Mount with Swival Joint
41.3" x 3.9", 12W, Remote, IP65





TILES


Indoor Surface
Mounted Tiles to
Create Unique and
Custom Patterns



DECO

Lines that become emboldened or hidden
when viewed from different angles
15.6" x 15.6", 20W, 1300 lm, IP20

CUBOID
Rectangles that appear
to be suspended in space
when illuminated
15.6" x 15.6", 20W,
2200 lm, IP20

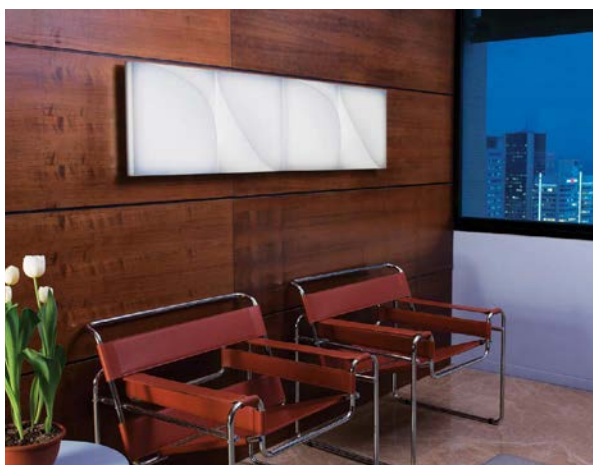

DUNE

Soft curves that create an
organic, dynamic look when
viewed from different angles
15.6" x 15.6", 20W,
2600 lm, IP20



BELLA

Up and Down
Indoor Pendant
Ø17.7", 40.7W,
1300 lm Up,
2350 lm Down,
IP20



TOP

Geometric, Organic Indoor
Pendant with a Warm Glow
2 Sizes
Ø7.9" - 9W - 1200 lm
Ø12.6" - 12W - 1750 lm
IP20