



designplan™ 

WALL



OZON

BRICK  THE WALL®

A red rectangular graphic containing the designplan logo and product information. The text "designplan™" is at the top, followed by "WALL" and a stylized logo symbol. Below that is the word "OZON" in a large font, and at the bottom is "BRICK IN THE WALL®" with a small logo symbol.

OZON M IP20


INDOOR

Fix (not adjustable) 0° - 0°

7.17" x 13.27"

Material : CALCYT® plaster

The Ozon line extends the range of recessed wall light fixtures with a refreshing round shape. The organic shape and the curved back create a great indirect lighting solution that is equipped with state of the art LED solution. The Ozon range is available in 2 different sizes in order to suit your requirements.

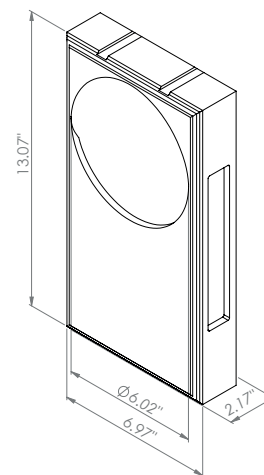

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT OZON M
REF N° 703 01 000 For mounting into gypsum walls

OZON M LED WARM DIM 500LM REMOTE

WARM DIM : DIMS FROM 3000°K TO 2000°K

REF N° 119 61 600 DIM 0-10V

350mA - 6W - Requires remote driver
4-Step MacAdam - CRI 80

OZON M LED 800LM REMOTE

REF N°	2200°K	2700°K	3000°K
DIM 0-10V	119 29 500	119 29 000	119 29 100

250mA - 6.4W - Requires remote driver
2-Step MacAdam - CRI 90 - R9=75

OZON M LED 1500LM REMOTE

REF N°	2700°K	3000°K	4000°K
DIM 0-10V	119 27 000	119 27 100	119 27 200

350mA - 9.5W - Requires remote driver
2-Step MacAdam - CRI 80



OZON L IP20


INDOOR

Fix (not adjustable) 0° - 0°

8.86" × 14.96"

Material : CALCYT® plaster

The Ozon line extends the range of recessed wall light fixtures with refreshing round shape. The organic shape and the curved back create a great indirect lighting solution that is equipped with state of the art LED solutions. The Ozon range is available in 2 different sizes in order to suit your requirements.

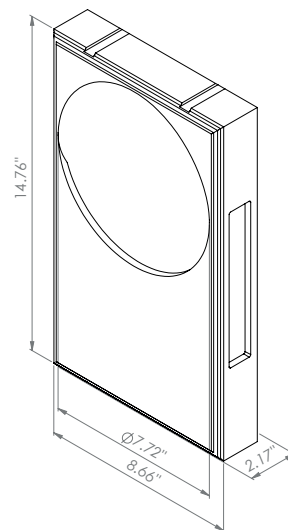

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT OZON L

REF N° 715 01 000 For mounting into gypsum walls

OZON L LED WARMDIM 500LM REMOTE

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 120 61 600 DIM 0-10V

350mA/50Hz - 6W - requires remote driver
parallel wiring $\text{C-0.2m} \text{E}$ -
4-Step MacAdam - CRI 80

OZON L LED 800LM REMOTE

REF N°	2200°K	2700°K	3000°K
DIM 0-10V	120 61 500	120 61 000	120 61 100

250mA/50Hz - 6.4W - requires remote driver parallel wiring $\text{C-0.2m} \text{E}$ -
2-Step MacAdam - CRI 90 - R9=75

OZON L LED 1500LM REMOTE

REF N°	2700°K	3000°K	4000°K
DIM 0-10V	120 63 000	120 63 100	120 63 200

350mA/50Hz - 9.5W - requires remote driver parallel wiring $\text{C-0.2m} \text{E}$ -
2-Step MacAdam - CRI 80

