


designplan™ 

# PASITO

OUTDOOR STEP LIGHTS  
WIDE SPACING BETWEEN FIXTURES ON PATHS



5W 24VDC

8.5W 24VDC

## RECESSED, FLUSH




PASITO MINI 1.0



PASITO 1.0

## RECESSED, WITH FRAME




PASITO MINI 1.1



PASITO 1.1

## SURFACE MOUNTED



PASITO MINI 1.2




PASITO 1.2

# PASITO MINI

- ▼
- PASITO MINI 1.0  
recessed installation, flush
- PASITO MINI 1.1  
recessed installation, with frame
- PASITO MINI 1.2  
surface installation



**PASITO MINI 1.0**



Required outer casing, not included




<b>POWER / POWER SUPPLY</b>	5W 24VDC
<b>MODEL NO.</b>	<b>PM1000</b> <span style="color: green;">000</span> <span style="color: orange;">0</span> <span style="color: gray;">E</span> White <b>PM1000</b> <span style="color: green;">000</span> <span style="color: orange;">0</span> <span style="color: gray;">F</span> Gray <b>PM1000</b> <span style="color: green;">000</span> <span style="color: orange;">0</span> <span style="color: gray;">H</span> Anthracite <b>PM1000</b> <span style="color: green;">000</span> <span style="color: orange;">0</span> <span style="color: gray;">T</span> Cor-ten

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	A - asymmetrical, 150°x90° B - 60°
<b>LUMEN OUTPUT AT SOURCE</b>	383 lm (3000K, CRI 80)
<b>DELIVERED LUMEN OUTPUT</b>	214 lm (3000K, 150°x90°, CRI 80, white finish)
<b>NO. AND TYPE OF LED</b>	1 high-intensity power LED 1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)
<b>MATERIAL</b>	body in anticorodal aluminum
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' neoprene cable H05RN-F 2x0.35/0.75 Ø0.25"
<b>MOUNTING</b>	recessed, flush (wall)



PASITO MINI 1.1



LED TECH 0.66 lbs IP65 IK06




5W 24VDC

- PM1100   E White
- PM1100   F Gray
- PM1100   H Anthracite
- PM1100   T Cor-ten



PASITO MINI 1.2



LED TECH 0.88 lbs IP65 IK06



5W 24VDC

- PM1200   E White
- PM1200   F Gray
- PM1200   H Anthracite
- PM1200   T Cor-ten

■	0 - CRI 80 1 - CRI >90
■	F - 2700K 5 - 3000K 9 - 4000K
■	A - asymmetrical, 150°x90° B - 60°
383 lm (3000K, CRI 80)	
214 lm (3000K, 150°x90°, CRI 80, white finish)	
1 high-intensity power LED 1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)	
body in technopolymer and aluminum	
remote power supply required, not included	
includes 0.98' neoprene cable H05RN-F 2x0.35/0.75 Ø0.25"	
<b>recessed, with frame (wall)</b>	


■	0 - CRI 80 1 - CRI >90
■	F - 2700K 5 - 3000K 9 - 4000K
■	A - asymmetrical, 150°x90° B - 60°
383 lm (3000K, CRI 80)	
214 lm (3000K, 150°x90°, CRI 80, white finish)	
1 high-intensity power LED 1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)	
body in technopolymer and aluminum	
remote power supply required, not included	
includes 0.98' neoprene cable H05RN-F 2x0.35/0.75 Ø0.25"	
<b>surface mounted (wall)</b>	

# PASITO

- ▼
- PASITO 1.0**  
recessed installation, flush
- PASITO 1.1**  
recessed installation, with frame
- PASITO 1.2**  
surface installation



**PASITO 1.0**

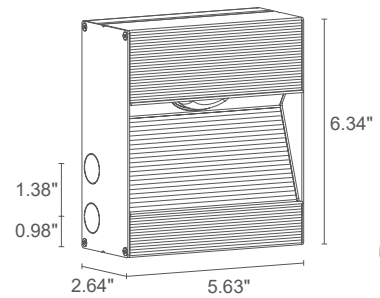

Required outer casing, not included




<b>POWER / POWER SUPPLY</b>	8.5W 24VDC
<b>MODEL NO.</b>	<b>PA1000</b> <span style="color: #FFD700;">■</span> <b>E</b> White <b>PA1000</b> <span style="color: #FFD700;">■</span> <b>F</b> Gray <b>PA1000</b> <span style="color: #FFD700;">■</span> <b>H</b> Anthracite <b>PA1000</b> <span style="color: #FFD700;">■</span> <b>T</b> Cor-ten

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	A - asymmetrical, 150°x90° B - 60°
<b>LUMEN OUTPUT AT SOURCE</b>	851 lm (3000K, CRI 80)
<b>DELIVERED LUMEN OUTPUT</b>	390 lm (3000K, 150°x90°, CRI 80, white finish)
<b>NO. AND TYPE OF LED</b>	1 high-intensity power LED 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
<b>MATERIAL</b>	body in anticorodal aluminum
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' neoprene cable H05RN-F 2x0.35/0.75 Ø0.25"
<b>MOUNTING</b>	<b>recessed, flush (wall)</b>





PASITO 1.1



5.63" x 4.92"




8.5W 24VDC

- PA1100 ■ ■ ■ ■ E White
- PA1100 ■ ■ ■ ■ F Gray
- PA1100 ■ ■ ■ ■ H Anthracite
- PA1100 ■ ■ ■ ■ T Cor-ten



PASITO 1.2



8.5W 24VDC

- PA1200 ■ ■ ■ ■ E White
- PA1200 ■ ■ ■ ■ F Gray
- PA1200 ■ ■ ■ ■ H Anthracite
- PA1200 ■ ■ ■ ■ T Cor-ten

■	0 - CRI 80 1 - CRI >90
■	F - 2700K 5 - 3000K 9 - 4000K
■	A - asymmetrical, 150°x90° B - 60°
851 lm (3000K, CRI 80)	
364 lm (3000K, 150°x90°, CRI 80, white finish)	
1 high-intensity power LED 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)	
body in technopolymer and aluminum	
remote power supply required, not included	
includes 0.98' neoprene cable H05RN-F 2x0.35/0.75 Ø0.25"	
<b>recessed, with frame (wall)</b>	

■	0 - CRI 80 1 - CRI >90
■	F - 2700K 5 - 3000K 9 - 4000K
■	A - asymmetrical, 150°x90° B - 60°
851 lm (3000K, CRI 80)	
364 lm (3000K, 150°x90°, CRI 80, white finish)	
1 high-intensity power LED 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)	
body in technopolymer and aluminum	
remote power supply required, not included	
includes 0.98' neoprene cable H05RN-F 2x0.35/0.75 Ø0.25"	
<b>surface mounted (wall)</b>	

# PASITO

## ACCESSORIES


### ACCESSORIES FOR INSTALLATION




**WC1420**  
Outer casing for solid walls  
(Pasito Mini 1.1)



**WC1430**  
Outer casing for solid walls  
(Pasito 1.1)



**WCA000E** - White  
**WCA000F** - Gray  
**WCA000H** - Anthracite  
**WCA000T** - Cor-ten  
Outer casing  
(Pasito Mini 1.0)



**WC14100E** - White  
**WC14100F** - Gray  
**WC14100H** - Anthracite  
**WC14100T** - Cor-ten  
Outer casing  
(Pasito 1.0)

PASITO 1.0  
 3000K, 10W, asymmetrical 150°x90° gray,  
 distance between fixtures: 11.48'







## POSITIONING DIAGRAMS

### PASITO MINI 1.0 / 1.1 / 1.2


**A** - Asymmetrical 150°x90°

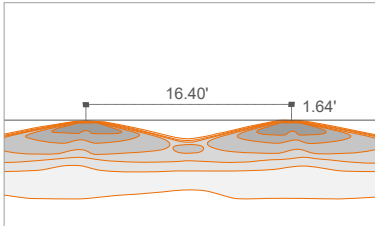


**B** - 60°

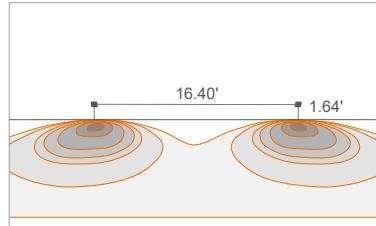

**A** - Asymmetrical 150°x90°

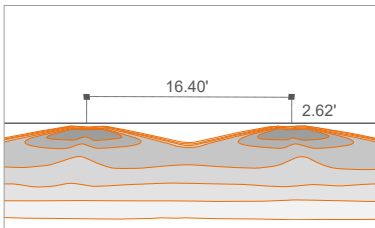


**B** - 60°

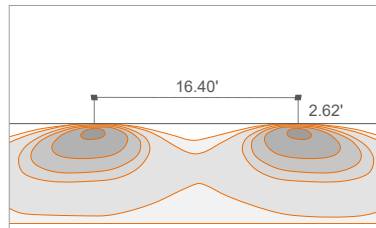


### PASITO 1.0 / 1.1 / 1.2


**A** - Asymmetrical 150°x90°

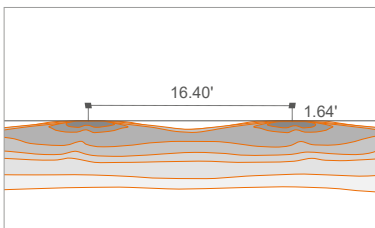


**B** - 60°

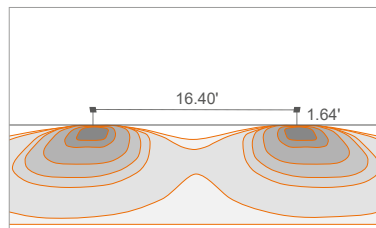

**A** - Asymmetrical 150°x90°

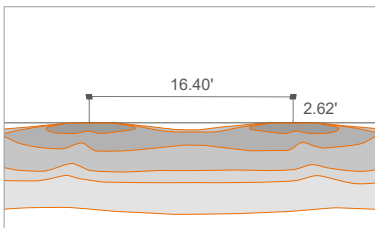

**B** - 60°

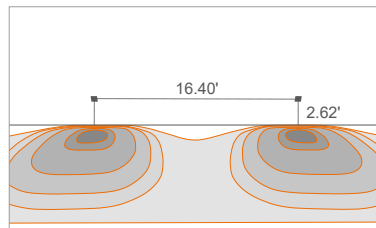



# PASITO


## OUTDOOR STEP LIGHTS

### PASITO MINI 1.0

1.1  
1.2


**A** - Asymmetrical 150°x90° CRI 80

Isofc (3000K)

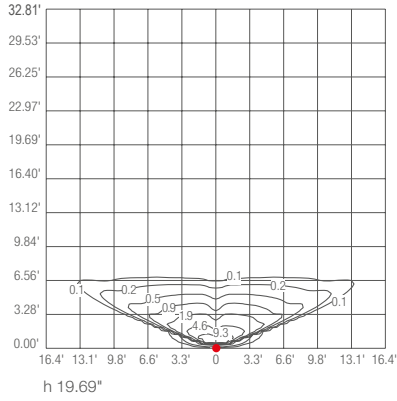


**B** - 60° CRI 80

Isofc (3000K)

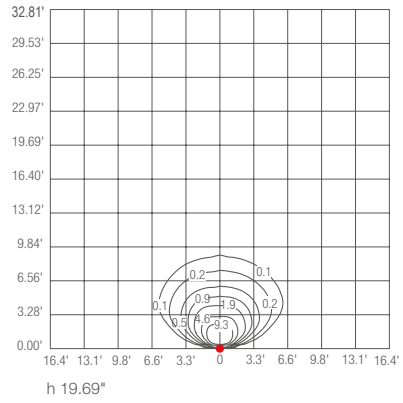


**A** - Asymmetrical 150°x90° CRI 80

Isofc (3000K)

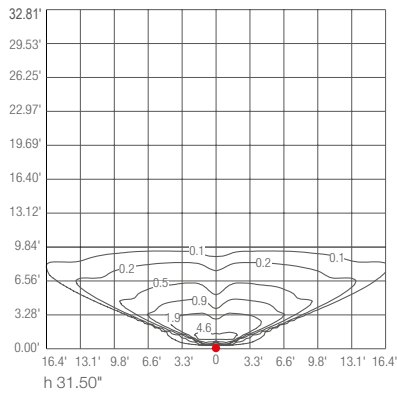

**B** - 60° CRI 80


Isofc (3000K)

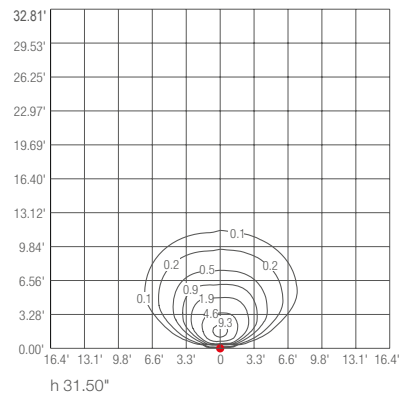

### PASITO 1.0


**A** - Asymmetrical 150°x90° CRI 80

Isofc(3000K)

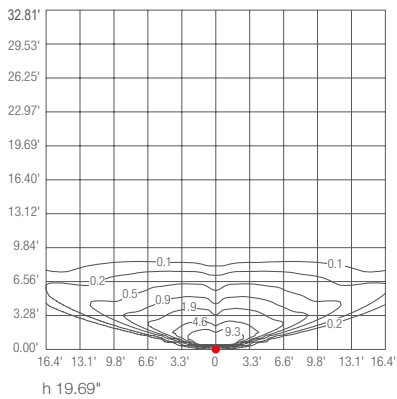

**B** - 60° CRI 80


Isofc (3000K)

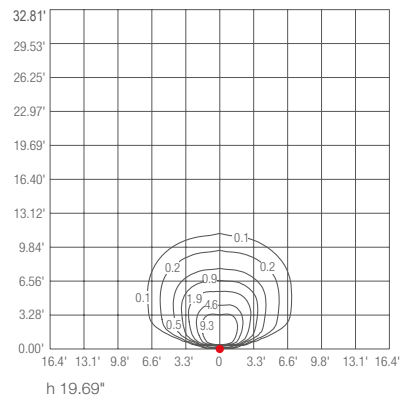




## PASITO 1.0

**A - Asymmetrical 150°x90° CRI 80**

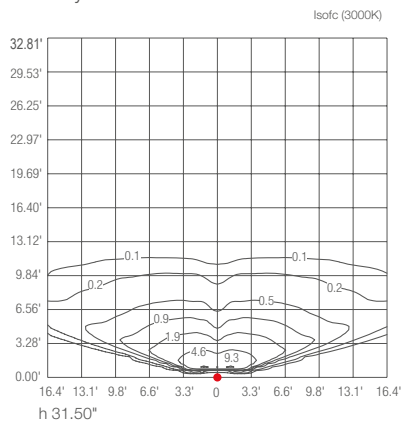


**B - 60° CRI 80**

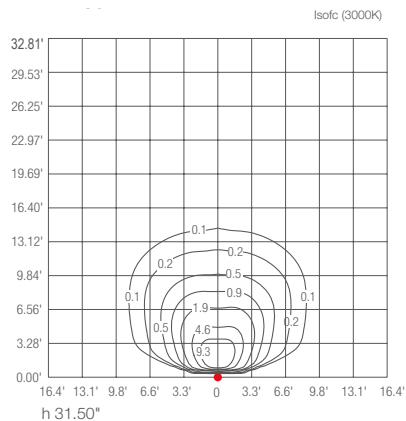


## PASITO 1.1 1.2


**A - Asymmetrical 150°x90° CRI 80**

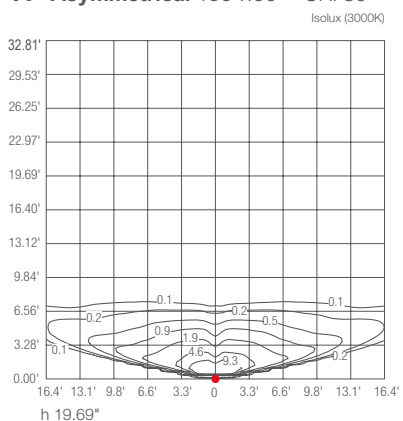

**B - 60° CRI 80**

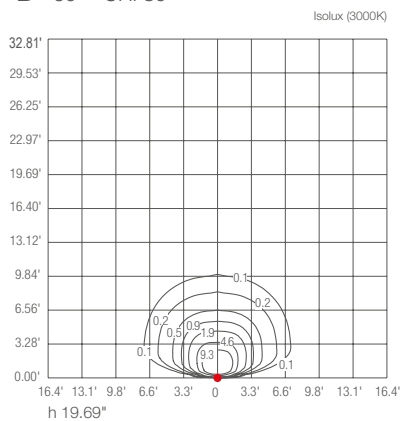

**A - Asymmetrical 150°x90° CRI 80**

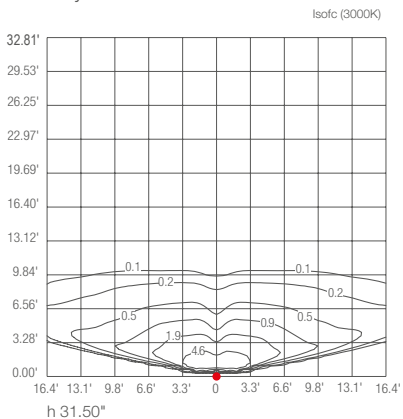

**B - 60° CRI 80**

