

PICA 8 IP54

OUTDOOR


Pica 8 is a recessed luminaire for use in walls as orientation lighting. It is available as an indoor (IP20), bathroom (IP54) or outdoor (IP54) version. The Pica can be directly installed in solid walls as well as in gypsum walls with an optional plasterkit.

TECHNICAL DATA

Wattage / Input	1W, 2W, 4W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Waterproof Calcyt [®] Plaster Lens: Frosted Diffuser
CCT	2200K, 2700K, 3000K, 4000K, Royal Blue
CRI	>80 and >90
Optics	Fixed
Delivered Lumens	38 lm (1W, 3000K)
Efficacy	38 lm/W
Finishes	Paintable Plaster
Cut-Out Dimensions	5.20" x 5.20"
Fixture Dimensions	4.96" l x 4.96" w x 2.52"
Aperature	Ø3.39"
Color Consistency	3-Step MacAdam
IP Rating	IP54



Wall Cut-Out: 5.20" x 5.20"
Fixture Dimensions

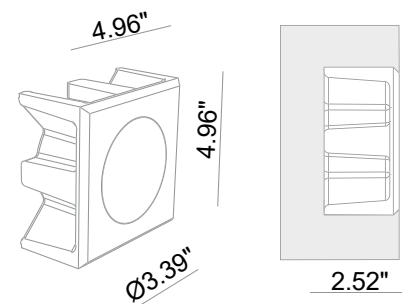

ORDERING INFORMATION

Example: 125 61 105. Accessories / Power Supplies ordered separately.

Model No.	Description	Model No.	Description
125 60 505 - 2200K	1W, 100 lm, CRI 80, IP54 Outdoor	125 61 505 - 2200K	4W, 400 lm, CRI 80, IP54 Outdoor
125 60 005 - 2700K	1W, 100 lm, CRI 90, IP54 Outdoor	125 61 005 - 2700K	4W, 400 lm, CRI 90, IP54 Outdoor
125 60 105 - 3000K	1W, 100 lm, CRI 90, IP54 Outdoor	125 61 105 - 3000K	4W, 400 lm, CRI 90, IP54 Outdoor
125 60 205 - 4000K	1W, 100 lm, CRI 90, IP54 Outdoor	125 61 205 - 4000K	4W, 400 lm, CRI 90, IP54 Outdoor
125 60 305 - Royal Blue	1W, 100 lm, IP54 Outdoor	125 61 305 - Royal Blue	4W, 400 lm, IP54 Outdoor
125 62 505 - 2200K	2W, 200 lm, CRI 80, IP54 Outdoor		
125 62 005 - 2700K	2W, 200 lm, CRI 90, IP54 Outdoor		
125 62 105 - 3000K	2W, 200 lm, CRI 90, IP54 Outdoor		
125 62 205 - 4000K	2W, 200 lm, CRI 90, IP54 Outdoor		
125 62 305 - Royal Blue	2W, 200 lm, IP54 Outdoor		

Job Name/Date:

Fixture Type Designation:

PICA 8 IP54

OUTDOOR

SUGGESTED POWER SUPPLIES

350mA


Part Number	Description	Input/Output	# of Fixtures		
			1W	2W	4W
PPLT00138	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-3	1-1	N/A
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	4-13	2-6	1-3
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2	1-19	1-9	1-4
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-19	1-9	1-4
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-20 (1-80)	1-10 (1-40)	1-5 (1-20)

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures		
						1W	2W	4W
PPLT00252	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driv. (120V forward phase only)	120VAC to 350mA, 7W, Class 2	3-6	2-3	1-1
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 7W, Class 2	3-6	2-3	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 13W, Class 2	6-13	3-6	2-3
PPLT00271	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driv. (120V forward phase only)	120VAC to 350mA, 13W, Class 2	6-13	3-6	2-3
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 19W, Class 2	11-18	6-9	3-4
PPLT00220	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driv. (120V forward phase only)	120VAC to 350mA, 19W, Class 2	11-18	6-9	3-4

For other power supply options consult factory.


ACCESSORIES - Installation



725 01 000
Outer Casing

PHOTOMETRIC DATA

Note all Photometry is 3000K

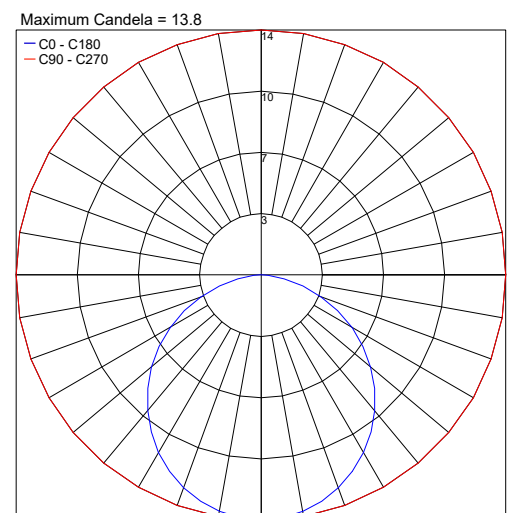

Job Name/Date:

Fixture Type Designation: