

PICA ZERO IP54

BATHROOM

Fixed (not adjustable) 0° - 0°

R 5.20"×5.20"

Material: CALCYT® plaster and frosted diffuser

PICA ZERO LED DIM 100 LM


REF N° 128 60 501 CRI 80 warm white 2200°K

REF N° 128 60 001 CRI 90 warm white 2700°K

REF N° 128 60 101 CRI 90 warm white 3000°K

REF N° 128 60 201 CRI 90 neutral white 4000°K

REF N° 128 60 301 royal blue

1W - excl. LED driver - current
controlled 350mA - 
Ⓟ - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350mA

PICA ZERO LED DIM 200 LM


REF N° 128 62 501 CRI 80 warm white 2200°K

REF N° 128 62 001 CRI 90 warm white 2700°K

REF N° 128 62 101 CRI 90 warm white 3000°K

REF N° 128 62 201 CRI 90 neutral white 4000°K

REF N° 128 62 301 royal blue

2W - excl. LED driver - current
controlled 350mA - 
Ⓟ - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350mA

PICA ZERO LED DIM 400 LM


REF N° 128 61 501 CRI 80 warm white 2200°K



REF N° 128 61 001 CRI 90 warm white 2700°K

REF N° 128 61 101 CRI 90 warm white 3000°K

REF N° 128 61 201 CRI 90 neutral white 4000°K

REF N° 128 61 301 royal blue

4W - excl. LED driver - current
controlled 350mA - 
Ⓟ - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350mA

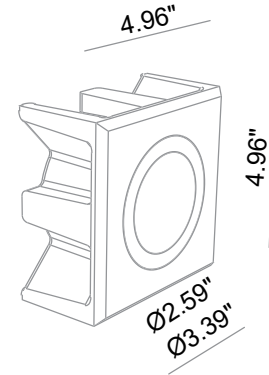


Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT PICA ZERO

REF N° 725 01 000 For mounting into gypsum walls

Housing: perforated aluminum



designplan™ 

79 Trenton Avenue
Frenchtown, NJ 08825

Tel: (908) 996-7710
Fax: (908) 996-7042