

PICA ZERO IP54

OUTDOOR

Fixed (not adjustable) 0° - 0°

R 5.20"×5.20"

Material: waterproof CALCYT+® and frosted diffuser

PICA ZERO LED DIM 100 LM


REF N° 128 60 505 CRI 80 warm white 2200°K

REF N° 128 60 005 CRI 90 warm white 2700°K

REF N° 128 60 105 CRI 90 warm white 3000°K

REF N° 128 60 205 CRI 90 neutral white 4000°K

REF N° 128 60 305 royal blue

1W - excl. LED driver - current controlled 350mA - 
Ⓟ - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350mA

PICA ZERO LED DIM 200 LM


REF N° 128 62 505 CRI 80 warm white 2200°K

REF N° 128 62 005 CRI 90 warm white 2700°K

REF N° 128 62 105 CRI 90 warm white 3000°K

REF N° 128 62 205 CRI 90 neutral white 4000°K

REF N° 128 62 305 royal blue

2W - excl. LED driver - current controlled 350mA - 
Ⓟ - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350mA

PICA ZERO LED DIM 400 LM


REF N° 128 61 505 CRI 80 warm white 2200°K


REF N° 128 61 005 CRI 90 warm white 2700°K

REF N° 128 61 105 CRI 90 warm white 3000°K

REF N° 128 61 205 CRI 90 neutral white 4000°K

REF N° 128 61 305 royal blue

4W - excl. LED driver - current controlled 350mA - 
Ⓟ - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350mA

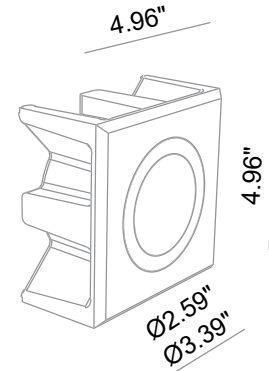


Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT PICA ZERO

REF N° 725 01 000 For mounting into gypsum walls

Housing: perforated aluminum

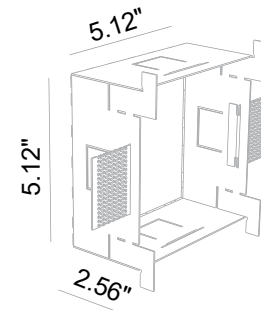

PICA

designplan 

79 Trenton Avenue
Frenchtown, NJ 08825

Tel: (908) 996-7710
Fax: (908) 996-7042