


Pipedo Direct is a surface mounted luminaire with direct downward light made of AirCoral® that is suitable for indoor installation. It is available in 3000K with a 120° optic as standard.



TECHNICAL DATA

Wattage / Input	8W (120-277VAC)
Power Supply	Integral
Construction	Body: AirCoral® Lens: Frosted Glass
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	575 lm (3000K)
Efficacy	71.8 lm/W
Optics	120°
Finishes	Paintable Plaster
Fixture Dimensions	19.29" l x 5.12" w x 3.94" h
Fixture Weight	-
IP Rating	IP20

Fixture Dimensions

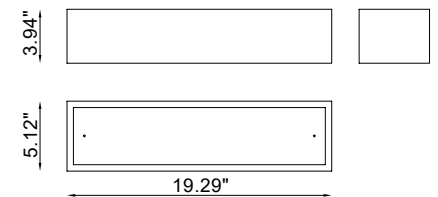

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

- Additionally, Aircoral® is:
- Antibacterial.
 - Antifungal.
 - Scratch-resistant.
 - Dust-resistant.
 - Suitable for painting.
 - LEED recognized material.

ORDERING INFORMATION

Example: BU2968.AC.US.

BU2968	AC	US
Model No.	Finish	
BU2968	AC - AirCoral®	US

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Maximum Candela = 228.7

