



## Plate

PLATE is distinguished by its elegant, simple form, produced in four different versions. It is ideal for corridor and access room wall lighting. The sophisticated design and reduced size make it compatible with any type of ambience and architecture.



# Plate 1.0




 1.76 LBS



3W - 120Vac

**PT10031** \_\_ **S** Mat Nickel

**PT10031** \_\_ **B** White


6W - 120Vac

**PT10061** \_\_ **S** Mat Nickel

**PT10061** \_\_ **B** White

LED COLOR OPTIC

- 0** - Cool White 5000K      **D** - Diffused
- 5** - Warm White 3000K
- 9** - Natural White 4000K
- f** - Warm White 2700K

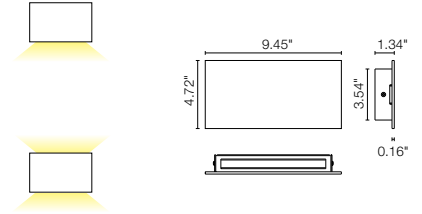

# Plate 1.1




 2.65 LBS



6W - 120Vac

**PT11061** \_\_ **S** Mat Nickel

**PT11061** \_\_ **B** White


12W - 120Vac

**PT11121** \_\_ **S** Mat Nickel

**PT11121** \_\_ **B** White

LED COLOUR OPTIC

- 0** - Cool White 5000K      **D** - Diffused
- 5** - Warm White 3000K
- 9** - Natural White 4000K
- f** - Warm White 2700K

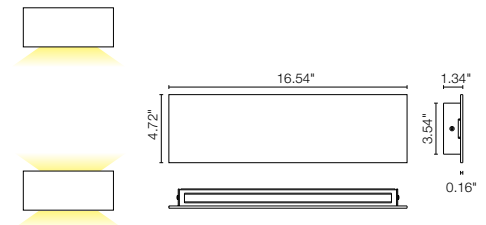

## TECHNICAL DATA

<b>Application</b>	Wall lights, perfect for corridors, access and residential interiors
<b>Installation</b>	Indoor wall light
<b>Mounting</b>	Wall mounting with screws and plugs
<b>Material</b>	Aluminium
<b>Finishes available</b>	Mat nickel; White
<b>N° and type of LED</b>	LED array
<b>Nom. power consumption</b>	3W; 6W (Plate 1.0) – 6W;12W (Plate 1.1)
<b>Power supply</b>	120vac 60 Hz
<b>Power supply unit</b>	Built-in
<b>Connection</b>	120vac 60 Hz
<b>Total Delivered Lumens</b>	150 lm (Plate1.0 3W); 302lm (Plate11 6W)
<b>Optics</b>	Diffused anti-glare
<b>LED colour</b>	White: Warm White (2700K); Warm White (3000K); Natural White (4000K); Cool White (5000K)
<b>IP</b>	40
<b>IK</b>	-
<b>UGR</b>	-

