

PROFILE 1.6
3000K, 22W, 51.10"



designplan™ 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

PROFILE

INDOOR LINEAR PROFILES



PROFILE 1.6



PROFILE 2.6



PROFILE 4.6



PROFILE



PROFILE 1.6
3000K, 9W, 17.64"




PROFILE 2.6
3000K, 9W, 17.64"



PROFILE 4.6
3000K, 9W, 17.64"



PROFILE 1.6

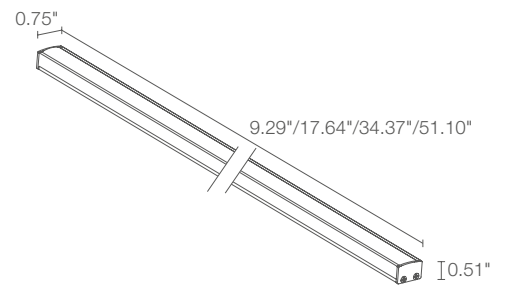

LED TECH lbs/ft 0.34 IP40

MODEL NO.	5W 24VDC 9.29" PF1600 ■ D A
	9W 24VDC 17.64" PF1601 ■ D A
	17W 24VDC 34.37" PF1602 ■ D A
	22W 24VDC 51.10" PF1603 ■ D A

LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
------------------	-------------------------------------

OPTICS	diffuse
---------------	---------

LUMEN OUTPUT AT SOURCE	420 lm (3000K, 9.29") 840 lm (3000K, 17.64") 1680 lm (3000K, 34.37") 2520 lm (3000K, 51.10")
-------------------------------	-------------------------------------------------------------------------------------------------------

DELIVERED LUMEN OUTPUT	255 lm (3000K, 9.29") 510 lm (3000K, 17.64") 1020 lm (3000K, 34.37") 1530 lm (3000K, 51.10")
-------------------------------	-------------------------------------------------------------------------------------------------------

NO. AND TYPE OF LEDS	30, 60, 120, 180 mid-power LEDs
-----------------------------	---------------------------------

MATERIAL	body in anodized aluminum lens in opal polycarbonate
-----------------	---------------------------------------------------------

POWER SUPPLY UNIT	remote power supply required, not included
--------------------------	--------------------------------------------


MOUNTING	surface mounted (ceiling, wall, cabinets)
-----------------	-------------------------------------------

ACCESSORIES	see accessories page
--------------------	----------------------

NOTES	non-standard lengths available on request
--------------	-------------------------------------------



PROFILE 2.6

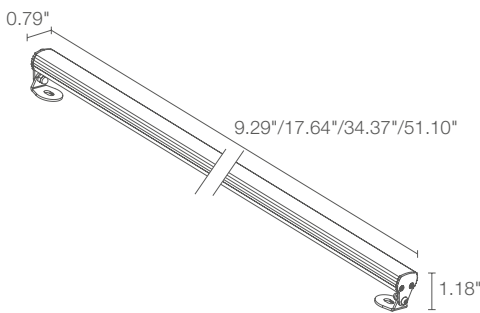

LED TECH lbs/ft 0.34 IP40

- 5W 24VDC 9.29"
PF2600 ■ D A
- 9W 24VDC 17.64"
PF2601 ■ D A
- 17W 24VDC 34.37"
PF2602 ■ D A
- 22W 24VDC 51.10"
PF2603 ■ D A

■ F - 2700K
5 - 3000K
9 - 4000K

diffuse

420 lm (3000K, 9.29")
840 lm (3000K, 17.64")
1680 lm (3000K, 34.37")
2520 lm (3000K, 51.10")

255 lm (3000K, 9.29")
510 lm (3000K, 17.64")
1020 lm (3000K, 34.37")
1530 lm (3000K, 51.10")

30, 60, 120, 180 mid-power LEDs

body in anodized aluminum
lens in opal polycarbonate

remote power supply required, not included


surface mounted (ceiling, wall, cabinets)

see accessories page

non-standard lengths available on request



PROFILE 4.6

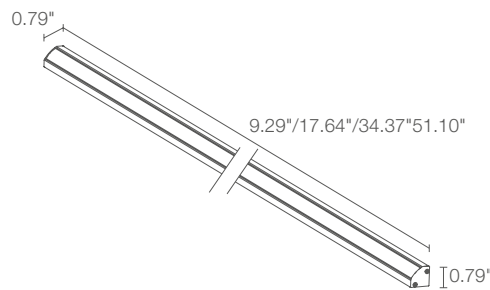

LED TECH lbs/ft 0.34 IP40

- 5W 24VDC 9.29"
PF4600 ■ D A
- 9W 24VDC 17.64"
PF4601 ■ D A
- 17W 24VDC 34.37"
PF4602 ■ D A
- 22W 24VDC 51.10"
PF4603 ■ D A

■ F - 2700K
5 - 3000K
9 - 4000K

diffuse

420 lm (3000K, 9.29")
840 lm (3000K, 17.64")
1680 lm (3000K, 34.37")
2520 lm (3000K, 51.10")

255 lm (3000K, 9.29")
510 lm (3000K, 17.64")
1020 lm (3000K, 34.37")
1530 lm (3000K, 51.10")

30, 60, 120, 180 mid-power LEDs

body in anodized aluminum
lens in opal polycarbonate

remote power supply required, not included

surface mounted (ceiling, wall, cabinets)

see accessories page


non-standard lengths available on request

PROFILE


PHOTOMETRIC DATA

PROFILE 1.6
2.6
4.6


D - Diffuse 9.29"

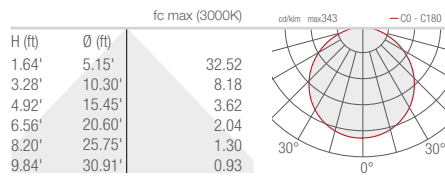

D - Diffuse 17.64"

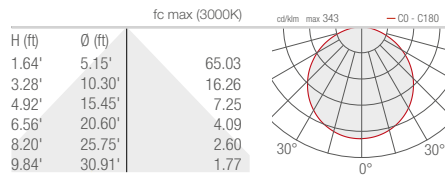

D - Diffuse 34.37"

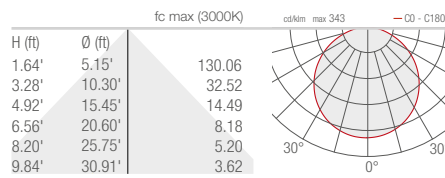

D - Diffuse 51.10"

